



MADRIX

LIGHTING CONTROL

MADRIX STELLA 8 User Manual

[Hardware User Guide]

Date: September 2026



Table Of Contents

<i>Part 1 Overview</i>	<i>3</i>
1 Introduction	4
2 Hardware Features	5
<i>Part 2 Device Configuration</i>	<i>8</i>
1 MADRIX HARDWARE MANAGER [USB / Ethernet]	9
2 Web Panel	12
Menu	14
Dashboard	19
DMX Watcher	23
Device List	27
Presets	29
Advanced	33
Hardware	56
Network	59
Ports	71
Update	76
Backup	82
Log	86
Information	89
<i>Part 3 RDM And MADRIX RADAR</i>	<i>96</i>
1 Using RDM And MADRIX RADAR	97
<i>Part 4 Technical Support</i>	<i>103</i>
1 Firmware Updates	104
<i>Part 5 General</i>	<i>118</i>
1 PC Power Management	119
2 Tips [Microsoft Windows / Networks / USB]	123
3 Web Links	140
<i>Part 6 Legal</i>	<i>142</i>
1 Imprint And Copyright	143

//PART 1

Overview

1 Overview

Topics Of This Chapter

- [Introduction](#)
- [Hardware Features](#)

1.1 Introduction

This topic includes:

- [MADRIX STELLA 8](#)
- [User Manuals](#)

MADRIX STELLA 8



MADRIX STELLA is the 8-port flagship controller with RDM support for ultimate control over DMX. It combines incredible features for DMX512 and RDM into a single DIN-rail controller that easily copes with high bandwidths in data-intensive lighting-control networks.

User Manuals

- **MADRIX STELLA 8 User Manual:** Use this manual to learn more about the web panel of the controller.
- **MADRIX STELLA 8 Technical Manual:** Learn how to install the physical device itself and details about power, data connections, and quick start.

1.2 Hardware Features

This topic includes:

- [Art-Net](#)
- [Streaming ACN \[sACN\]](#)
- [Using A 3rd-Party Controller](#)
- [Access Over USB-C](#)
- [Reset](#)

Art-Net

MADRIX STELLA 8 supports Art-Net 4, in protocol version **DI**.

MADRIX STELLA 8 works with a dynamically created BindIndex:

- Depending on your configuration of the unit, the number of configured input and output universes will each be represented by their own BindIndex; resulting in fewer or more indices.
- If configured to its fullest, 32 Sources, 32 Destinations, and 1 RDM universe will result in 65 indices.

Streaming ACN [sACN]

MADRIX STELLA 8 supports the Preview Flag of Streaming ACN [sACN] to discard data that is intended for visualization purposes only.

Using A 3rd-Party Controller

MADRIX STELLA 8 is a standard network node. Because of this, you can use the controller with applications, consoles, desks, or controllers that are compatible with Art-Net or Streaming ACN [sACN] to receive network data via Ethernet network.

Access Over USB-C

The accessing device (Windows, macOS, Android, iOS) and controller will automatically create a network over USB by using a virtual link. There is no configuration needed! The controller has fixed IP addresses for each USB-C port, that cannot be changed and therefore are permanently accessible:

- **USB-C Front: 192.168.10.11** (Subnet mask: 255.255.255.0)
- **USB-C Side: 192.168.11.11** (Subnet mask: 255.255.255.0)

Important: This also means that a maximum of 2 units can be connected over USB-C to a single accessing device: 1x to USB-C Front and 1x to USB-C Side.

Reset

Send Art-Net PollReply Including Squawking

- Quickly pressing the 'Reset' button on the controller once using a suitable tool sends out a PollReply for communication with MADRIX® software and an Art-Net PollReply, incl. the Squawking flag for device identification.

Start Bootloader

- **1]** Disconnect all cables from the controller (power, data, DMX).
- **2]** Use a suitable tool to press the 'Reset' button (in the top right).
- **3]** Continue to press the 'Reset' button and supply power again via 'Power', 'USB-C', or 'PoE'.
- **4]** Continue to press the 'Reset' button for 1 or 2 seconds.

Reset To Factory Default Settings

In rare cases, you might need to do a reset to factory default settings:

- **1]** Disconnect all cables from the controller (power, data, DMX).
- **2]** Use a suitable tool to press the 'Reset' button (in the top right).
- **3]** Continue to press the 'Reset' button and supply power again via 'Power', 'USB-C', or 'PoE'.
- **4]** Continue to press the 'Reset' button and wait until all status LEDs of the controller flash or wait 5 seconds.

- [Simply repeat these steps should the process fail.]
- Alternatively, go to menu **Hardware** > **Special Commands** > **Reset To Factory Default Settings** in the controller's web panel. See menu » [Hardware](#)
- Or use MADRIX HARDWARE MANAGER. Learn more » [MADRIX HARDWARE MANAGER \[USB / Ethernet\]](#)

//PART 2

Device Configuration

2 Device Configuration

This topic includes:

- [Overview](#)
- [Topics Of This Chapter](#)

Overview

- **Web Panel:** The built-in web panel is the main way of configuring your controllers. By using a standard web browser, you gain quick access to all settings of the controller.
- **MADRIX HARDWARE MANAGER:** This software is available separately and for free. You can use it specifically to manage MADRIX hardware controllers, including their basic configuration and firmware updates.

Topics Of This Chapter

- [MADRIX HARDWARE MANAGER \[USB / Ethernet\]](#)
- [Web Panel](#)

2.1 MADRIX HARDWARE MANAGER [USB / Ethernet]

This topic includes:


- [Overview](#)
- [Device Configuration](#)
- [Firmware Updates](#)
- [More Information](#)

Overview

MADRIX HARDWARE MANAGER is a software tool that is available separately and allows you to manage MADRIX hardware products.

It can be used for basic device configuration and to update the firmware of your controller.

Download from » www.madrix.com

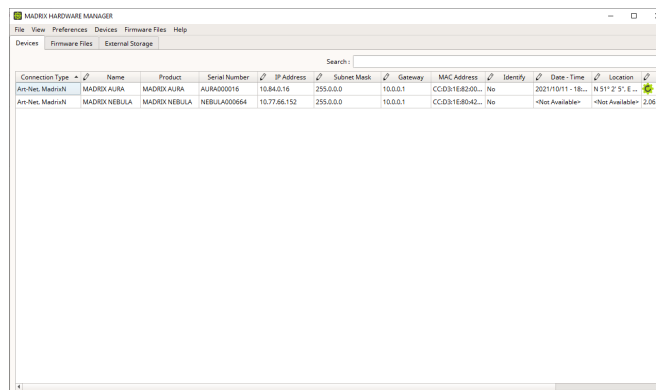

Important Information

- **An active internet connection is required to download firmware files. There are no files available when starting the software for the first time.**
- **Either use USB or the Ethernet connection!**
When using both connection types devices will be shown with two different entries in the list, which may lead to severe issues when accidentally updating the device over both connections simultaneously.
- **Make sure to -stop- sending data to your devices when managing them with MADRIX HARDWARE MANAGER.**

This refers to input and/or output over Art-Net, sACN, DMX512, etc.

Otherwise, changes and updates might fail.

Device Configuration

Basic Configuration

- 1] In **MADRIX HARDWARE MANAGER**, navigate to the **Devices** tab.
- 2] You will see connected devices in a list including their current main settings.

- **3]** Basic settings can be changed and configured, including **Name**, **IP Address**, **Subnet Mask**, **Gateway**, and more.

Open Web Configuration

- **1]** In **MADRIX HARDWARE MANAGER**, navigate to the **Devices** tab and select a controller/controllers in the list.
- **2]** **Right Mouse Click > Open Device Configuration Via HTTP...** opens your standard web browser and the built-in web configuration of the selected controller.
- Learn more » [Web Configuration](#)

Restore Factory Default Settings

- **1]** In **MADRIX HARDWARE MANAGER**, navigate to the **Devices** tab and select a controller/controllers in the list.
- **2]** **Right Mouse Click > Restore Factory Default Settings** restores the original settings of the controller.
[Since this may change back the IP address to the original setting, the website will automatically be reloaded after a few seconds and you will automatically be redirected to the correct website and IP address.]

Firmware Updates

- **1]** In **MADRIX HARDWARE MANAGER**, navigate to the **Firmware Files** tab and make sure you have the right [the latest] firmware version already downloaded and available. An active internet connection is required.
- **2]** Go to the tab **Devices** and select a device/devices in the list.
- **3]** Navigate to the column **Firmware** and select the firmware you wish to install on the devices.

More Information

Please see the **MADRIX HARDWARE MANAGER User Manual** for more information.

See » help.madrix.com


2.2 Web Panel

This topic includes:

- [Overview](#)
- [Hints For Mobile Devices](#)
- [Quick Start](#)
- [Topics Of This Chapter](#)

Overview

- The web panel of MADRIX STELLA 8 is modern, mobile friendly, and multi-lingual.
 - By using a standard web browser, you gain quick access to all settings of the controller.
 - The design of the web panel automatically adjusts to the size of the accessing computer/mobile device. [A minimum display size of 320 x 480 pixels expected.]
 - You can choose your preferred language from the » [Menu](#)

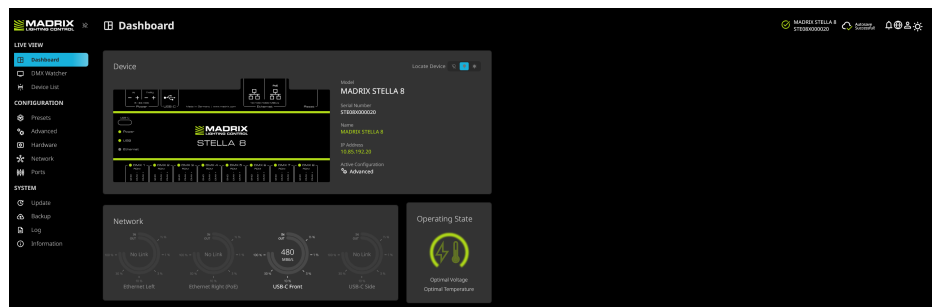

Hints For Mobile Devices

- **iOS:** Converting from Lightning to USB-C requires an OTG (On The Go) adapter!
- **Android:** You need to deactivate all other networks first (Wi-Fi, Mobile Data)! Enabling Airplane Mode does not suffice.

Quick Start

- See a first overview over the controller in the menu » [Dashboard](#)
- Change the network settings of the controller, incl. IP address, under menu » [Network](#)

- Configure the controller for its designated purpose with the help of menu » [Presets](#) or the menu » [Advanced](#) Configuration.

Topics Of This Chapter

- [Menu](#)
- [Dashboard](#)
- [DMX Watcher](#)
- [Device List](#)
- [Presets](#)
- [Advanced](#)
- [Hardware](#)
- [Network](#)
- [Ports](#)
- [Update](#)
- [Backup](#)
- [Log](#)
- [Information](#)

2.2.1 Menu

This topic includes:

- [Left Menu](#)
- [Top Menu](#)

Left Menu



Pinned



[Click To

Unpin Again]

Pin / Unpin - Allows you to decide if the left menu should always be visible [i.e. pinned] or not [i.e. unpinned].

- By default, the menu is pinned.
- By default, menu item **Dashboard** is selected.


Unpinned
[Click To Pin
Again]

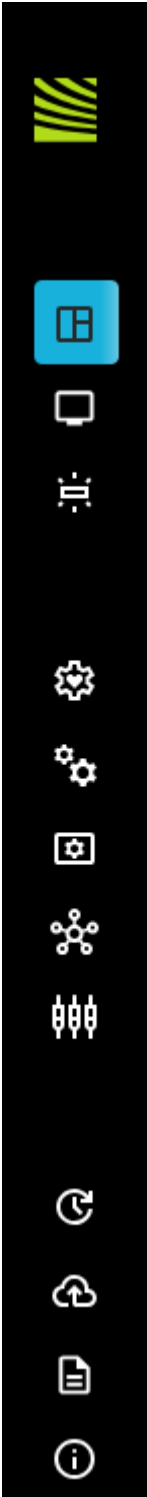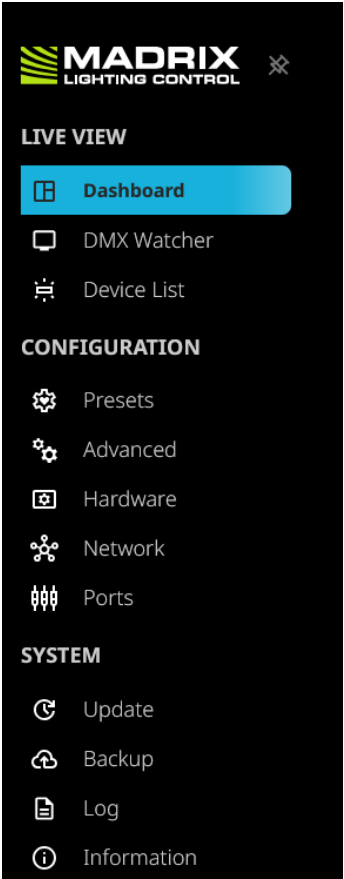

Online Update Available Shows that your web browser found an active internet connection and automatically checked if a new update is available for your device.



Click on it to directly jump to menu » [Update](#)

Top Menu



Shows the Device Name (Long) of the controller and its serial number in combination with the current connection status:



- Connected
- Disconnected



Disconnect
d

If you experience a disconnect, for example in case the network cable got detached, the web panel should automatically reconnect to the controller again if the connection has been established again [in around 30 seconds]. Or you can simply reload the page in the web browser [Usually keyboard shortcut Ctrl + R or F5].

Autosave

If activated, shows the current status of the feature for automatic saving:



- **Autosave Successful!**
- **Auto. Saving...**



- **Unsaved Changes!**



Manual Save

If automatic saving is disabled, manual saving becomes available.



- **Manual Saving Available**
- **Man. Saving...**



- **Save Successful!**
- **Unsaved Changes**



- **Preparing To Save**



- **Discard Changes**



Online Update Available

Shows that your web browser found an active internet connection and automatically checked if a new update is available for your device.



Click on it to directly jump to menu » [Update](#)

Notifications

Shows the latest errors.



For more information, go to menu » [Log](#)

Language Selection

The web panel is available in various languages. Choose from:



- **Deutsch** - Activates the **German** language for the web panel.
- **English** - Activates the **English** language for the web panel.
- 简体中文 - Activates the **Simplified Chinese** language for the web panel.
- **Español** - Activates the **Spanish** language for the web panel.
- **Français** - Activates the **French** language for the web panel.
- हिन्दी - Activates the **Hindi** language for the web panel.
- **Bahasa Indonesia** - Activates the **Indonesian** language for the web panel.
- **Italiano** - Activates the **Italian** language for the web panel.
- 日本語 - Activates the **Japanese** language for the web panel.
- 한국어 - Activates the **Korean** language for the web panel.
- **Português brasileiro** - Activates the **Brazilian Portuguese** language for the web panel.
- **Русский** - Activates the **Russian** language for the web panel.
- **Türkçe** - Activates the **Turkish** language for the web panel.

The default setting is automatically set by using the language locale set for your operating system and web browser.


Once set or once changed, the setting is then saved in the local storage of your web browser [via Cookie].

Profile




By default, no active profile is set up for the controller.

- That means Web Panel Access Control is disabled.
- **Autosave** - As a shortcut, allows you to enable or disable the autosaving feature here.

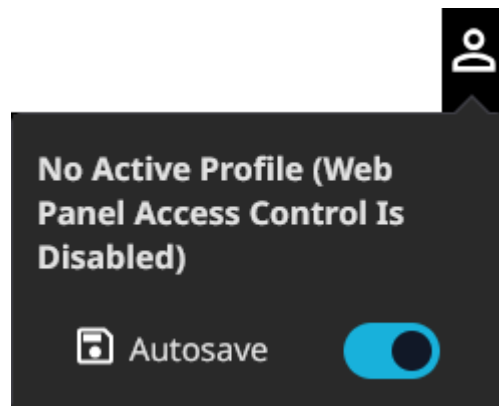

If you are restricting access to the web panel by enabling Web Panel Access Control and by setting a Username and Password, a profile is created accordingly.

- See menu » [Network](#) to enable or disable Web Panel Access Control.
- **Autosave** - As a shortcut, allows you to enable or disable the autosaving feature here.
- **Log Out** - Locks access to the web panel again by logging you out.
- **Important: You will automatically be logged out after 30 minutes of inactivity!**

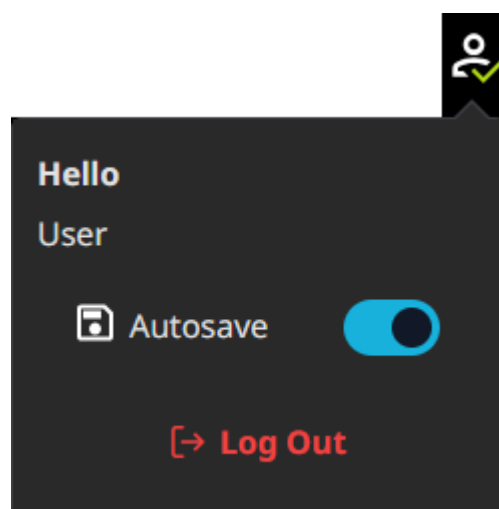



Light Theme - Switches the Web Panel from dark colors to mainly light colors.
This is the default setting.


Dark Theme - Switches the Web Panel back from light colors to mainly dark colors.

2.2.2 Dashboard

This topic includes:

- [Overview](#)
- [Device](#)
- [Network](#)
- [Operating State](#)

Overview

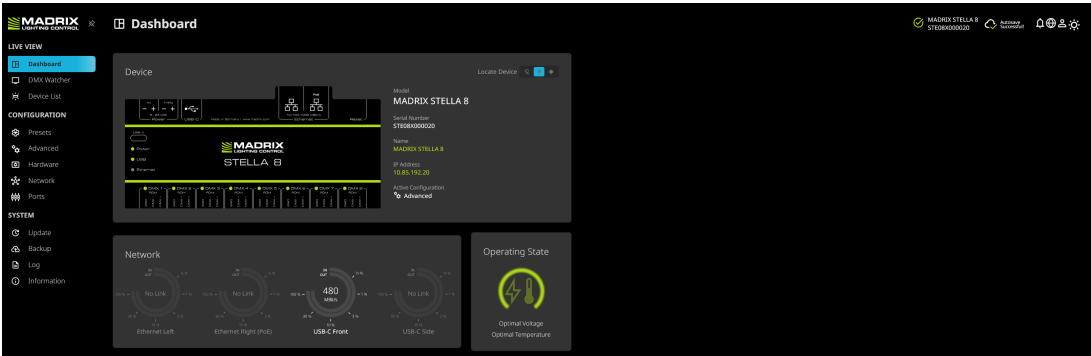

Device

Provides a comprehensive overview over major device characteristics.

- Locate** Uses the Art-Net ArtAddress commands to set the controller's status LEDs.
- Device**



- **Mute Status Indicators** - Switches off and disables all built-in status indicators of a device over Art-Net [ArtAddress > AcLedMute].



- **Operate Status Indicators Normally** - Allows the built-in status indicators of a device to operate normally again, after having them switched off [ArtAddress > AcLedNormal].



- **Locate Device** - Activates the highlight mode [ArtAddress > AcLedLocate]. The corresponding status indicators of the selected interfaces will flash for a better identification or tests.

This makes it easier to see the device on site/stage. It considerably speeds up the procedure of programming or testing the selected interfaces.

In case of MADRIX STELLA 8, the MADRIX logo on the controller itself will be blinking as long as Locate Device is active.



Shows a helpful representation of the controller.



- In this way, you always have a picture of the controller and its physical layout available.
- A condensed version will be shown when displayed on mobile devices.
- The status LEDs for **Power**, **USB**, **Ethernet** as well as **DMX 1** to **DMX 8** will light up in this graphic the same way they are physically lit on the device itself when sending or receiving control data.
 - See the **MADRIX STELLA 8 Technical Manual** for all Status-LED Codes
 - Even if **Mute Status Indicators** [see above] is enabled, the device status will be shown through the status LEDs here.
- The MADRIX Logo will blink if Locate Device is enabled [see above] or even sent to the device from the outside.
- The MADRIX Logo will appear red if the connection to the device has been lost.
- The PoE/Ethernet label/icon will blink green if PoE is connected and used.

Model Shows the device type, i.e. MADRIX STELLA 8.

Serial Number Shows the serial number of this unit.

Name Shows the Art-Net Long Name; as set under menu »[Hardware](#)

IP Address Shows the currently used IP address.

Active Configuration Shows which configuration is currently active and selected for operation.


- Shows  **Art-Net -> DMX / DMX -> Art-Net / Mode: Default**, for example, if the default Preset is currently active.
See also menu » [Presets](#)
- Shows  **Advanced** if a custom configuration is being used.
See also menu » [Advanced](#)

Network

Provides an overview over the main characteristics regarding network ports and communication. This includes:

- **Ethernet Left**
- **Ethernet Right (PoE)**
- **USB-C Front**
- **USB-C Side**

Information and values on this page are constantly being updated for you.

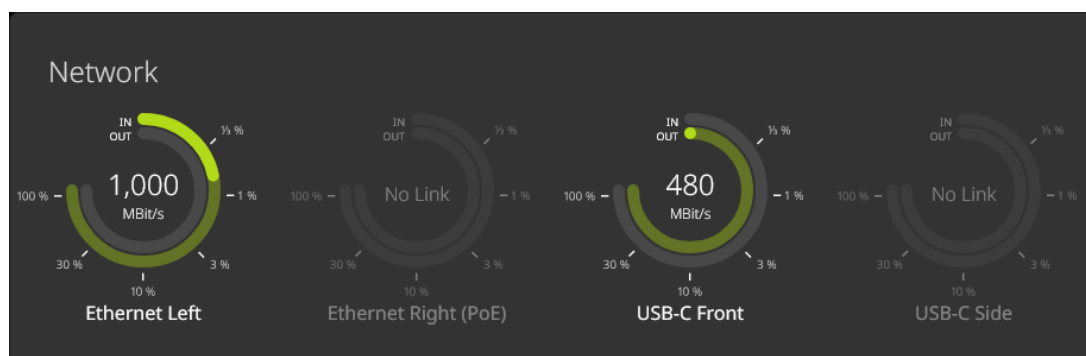


- **Connection Speed** - Shows the maximum speed that is available for this network connection.
This includes: **1000 MBit/s** [Ethernet], **480 MBit/s** [USB-C], **100 MBit/s** [Ethernet], **10 MBit/s** [Ethernet], and **No Link** in case there is no connection.

- **IN, 0% - 100 %** - Shows the used bandwidth for incoming signals.
- **OUT, 0% - 100 %** - Shows the used bandwidth for outgoing signals.
 - Detailed data rates are available under menu » [Information](#)
 - **Gray** indicates no connection.
 - **Dark Green** indicates a successful connection.
 - **Light Green** indicates light bandwidth usage.
 - **Orange** indicates medium bandwidth usage.
 - **Red** indicates heavy bandwidth usage.

Operating State

Shows if working conditions are optimal or not optimal for the controller.



- ⚡ **Optimal Voltage** - Is the preferred and ideal state as the controller is able to operate normally regarding the supply of power.
- ⚡ **Voltage Too High** - The controller will manage its power and deactivate the DMX Ports.
 - It is advised to make sure that the controller receives the correct voltage!
- ⚡ **Voltage Too Low** - The controller will manage its power and deactivate the DMX Ports.
 - It is advised to make sure that the controller receives the correct voltage!
- 🌡 **Optimal Temperature** - Is the preferred and ideal state as the controller is able to operate normally regarding the ambient temperature.
- 🌡 **Temperature Too High** - The controller may shut down soon due to overheating or in general the longevity of the unit is threatened. The controller will deactivate the DMX Ports.
 - It is advised to make sure that the ambient temperature is lowered!
- 🌡 **Temperature Too Low** - The controller will deactivate the DMX Ports.
 - It is advised to make sure that the ambient temperature is increased!

2.2.3 DMX Watcher

This topic includes:

- [Overview](#)
- [Monitoring Data](#)
- [Creating Snapshots](#)

Overview

Make sure to select the correct data source first [Reference / Index]!



Monitoring Data

The DMX Watcher allows you to monitor the DMX data the controller is receiving, processing, or sending out live.

Reference Allows you to choose the data source:

- **DMX-OUT** [The actual processed output at the DMX port.]
- **DMX-IN** [The actual raw input at the DMX port.]
- **Source** [The data of the specified Source. Modifiers can be applied to Sources and thus change the data.]
- **Destination** [The data of the specified Destination. Modifiers can be applied to Sources and Destinations and thus change the data.]

- **Snapshot** [1-frame recordings you may have created in this menu. See [Creating Snapshots](#)]
- By default, DMX-OUT 01 is selected. When switching back to this view, the previously selected reference will be selected again.

Index

Allows you to select the specific index number, according to the specific source:

- **01 - 08** for Reference DMX-OUT [referring to the number of ports of the controller].
- **01 - 08** for Reference DMX-IN [referring to the number of ports of the controller].
- **01 - 32** for Reference Source [referring to the maximum number that can be defined].
- **01 - 32** for Reference Destination [referring to the maximum number that can be defined].
- **01 - 32** for Reference Snapshot [referring to the maximum number that can be created].
- By default, DMX-OUT 01 is selected. When switching back to this view, the previously selected index will be selected again.


Settings




Allows you to change the settings of the view.

Note: 1 DMX Universe includes up to 512 DMX Channels.

- **Refresh Rate** - Defines the speed at which the view and shown data is updated and refreshed; from slowest to fastest [**0.1 Hz**, **1 Hz**, **10 Hz**, **20 Hz**, **Maximum**].
- **Show Bars** - Defines if shown data is visualized graphically with the help of green rectangles.
- **Show Values** - Defines if the shown data is visualized with the help of the exact DMX values [ranging from **0** to **255**].
- **Number Of Columns** - Defines the graphical structure of the view.
 - Auto.** - Automatically arranges the columns depending on the window size. The fewer columns are possible, the more rows are shown.
 - Grid** - Allows you to define the size of sections. For example, by default the view is shown in section of 8 depending on the window size; meaning 8, 16, 24, or 32 columns are shown. **Column Grid** allows you to change the section size accordingly. Valid values range from 1 to 512.
 - Fixed** - Shows a maximum number of columns as defined by you via **Number Of Fixed Columns**. Valid values range from 1 to 512.



Pause - Halts the live view.



Live - Is only available if Pause has been clicked. Continues the live view to show DMX data in real time.

**Frames Per
Second**

Shows the current data rate [in FPS].

DMX Channels

Shows how many DMX channels are currently used.

Example: **510 Of 512** [for 170 RGB pixels and optimized frames; since $170 \times 3 = 510$]

Creating Snapshots



Creates a 1-frame recording at the time of your click. [You might want to pause the live display beforehand.]

A new window opens.

[To record the data at the time of the click, the live view of the DMX Watcher is being paused until the creation process has finished.]

Create Snapshot

Name: 0 / 31

Save As:

- **Name** - Enter a label for the new Snapshot [with a maximum of 31 characters plus null].
- **Save To** - Select to which index number the new Snapshot should be saved. Valid values range from 01 to 32.

Snapshots can be used as data source for various functions of the controller, such as output, backup, highlighting, and more.

Editing Channels

You can edit single channels of recorded Snapshots for fine adjustments. Use the following workflow :


- Select your recorded Snapshot in the DMX Watcher.



- Click **Pause** to halt the view.




- **Left Mouse Click** - Select the channel you want to edit with a left mouse click. A new fader is then shown as an overlay.

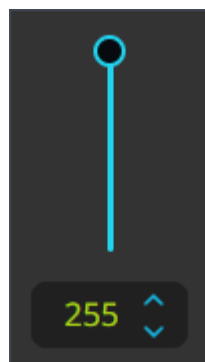

- Adjust the DMX value of the selected channel as required.
- Adjust more channels as required.
- **Save the Snapshot again** by clicking on **Snapshot**



- Click **Live** to continue the view.




2.2.4 Device List

This topic includes:

- [Overview](#)
- [List Of Available Art-Net Devices](#)

Overview

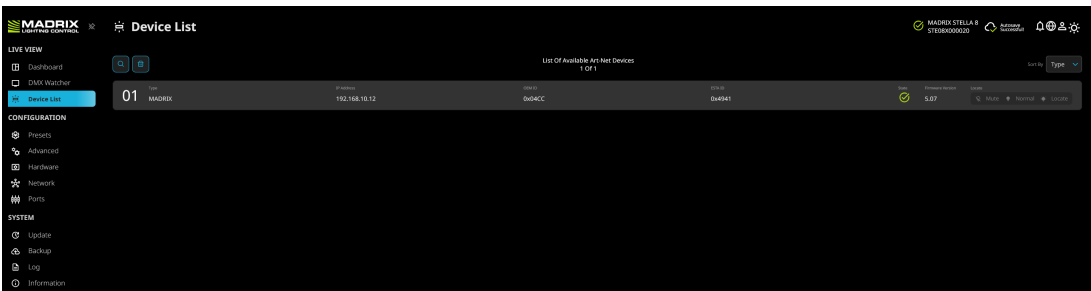

List Of Available Art-Net Devices

MADRIX STELLA 8 uses standard mechanics of the Art-Net protocol to find available Art-Net devices in the network.



Search - Searches for Art-Net devices in the network. [Please allow a few seconds for devices to appear in the list.]



Remove - Removes all Art-Net devices from the list.

2 Of 2

Shows the number of Art-Net devices that are available and the number that has been found. [X Available Of Y Found]

Sort By

Allows you to sort the list alphabetically by **Type**, **IP Address**, **State**, or **Firmware Version**.

#	An index number of the Art-Net devices is provided for easier referencing.
Type	Shows if the device could be identified further: ▪ Art-Net [For any generic Art-Net device that is not MADRIX software or a MADRIX hardware controller.] ▪ MADRIX [For MADRIX 5 Software.] ▪ MadrixTimeCodeSender [For MADRIX 5 Time Code Sender Software.] ▪ RADAR [For MADRIX RADAR Software.] ▪ PLEXUS [For MADRIX PLEXUS devices.] ▪ LUNA 4 [For MADRIX LUNA 4 devices.] ▪ LUNA 8 [For MADRIX LUNA 8 devices.] ▪ LUNA 16 [For MADRIX LUNA 16 devices.] ▪ NEBULA [For MADRIX NEBULA devices.] ▪ STELLA [For MADRIX STELLA devices.] ▪ ORION [For MADRIX LUNA 8 devices.] ▪ AURA [For MADRIX AURA devices.] ▪ STELLA 8 [For other MADRIX STELLA 8 devices.]
IP Address	Shows the IP address of the Art-Net device. If shown underlined in blue, it can be used as a click-able link to call up the Art-Net device with this IP address in the web browser.
OEM ID	Shows the OEM ID the Art-Net device has reported.
ESTA ID	Shows the ESTA ID the Art-Net device has reported.
State	Shows the status of the Art-Net device.
	▪ Timeout [The connection to this device has timed out.] ▪ Available [The connection to the device is active.]



Firmware Version Shows the firmware version of the Art-Net device, if available.

Locate Allows you to use the ArtAddress commands:



Mute

- **Mute Status Indicators** - Switches off and disables all built-in status indicators of a device over Art-Net [ArtAddress > AcLedMute].



Normal

- **Operate Status Indicators Normally** - Allows the built-in status indicators of a device to operate normally again, after having them switched off [ArtAddress > AcLedNormal].



Locate

- **Locate Device** - Activates the highlight mode [ArtAddress > AcLedLocate]. The corresponding status indicators of the selected interfaces will flash for a better identification or tests.


This makes it easier to see the device on site/stage. It considerably speeds up the procedure of programming or testing the selected interfaces.

2.2.5 Presets

This topic includes:

- [Overview](#)
- [Introduction](#)
- [How To Activate A Preset](#)

Overview

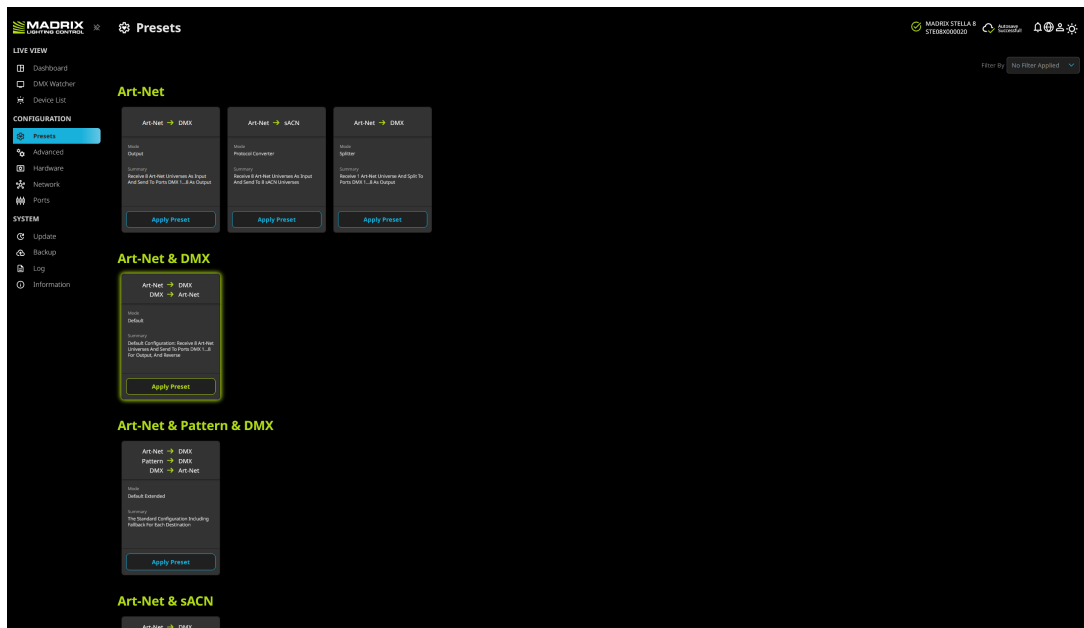

Introduction

For MADRIX STELLA 8, Presets are common configurations to quickly get started.

You can operate STELLA 8 as DMX controller, as DMX booster, as DMX splitter, as merger, as protocol converter, and much more.

- Presets are grouped into categories, such as **Art-Net**, **DMX**, **Pattern**, etc.
- Each Preset offers more information:
 - Mode** - Describes the overall functionality of the underlying configuration, such as **Output**, **Splitter**, **Input**, **Merger**, **Booster**, etc.
 - Summary** - Describes the functionality of the underlying configuration in more detail.
- Clear** - Is a special category which removes all or parts of the current configuration, which may include all Sources and Destinations, or only Sources, or only Destinations.
- Presets **Pattern -> DMX**, **Pattern -> Art-Net**, **Pattern -> sACN** require that 8 Snapshots have been created first in order to work correctly. See »[Creating Snapshots](#)

In its default Preset, MADRIX STELLA 8 receives 8 universes over Art-Net via Ethernet [Art-Net universes 0 to 7] and sends them to DMX 1 to DMX 8 for DMX output as well as being ready to receive DMX input via the DMX 1 to DMX 8 and sending it out to Art-Net [Art-Net universes 248 to 255].

You can customize the settings of a Preset or create a completely individual configuration under menu »[Advanced](#)

Filter By Defines which kind of Presets are shown and allows you to filter for:


- **All**
- **Art-Net**
- **Clear**
- **DMX**
- **Pattern**
- **sACN**

Or any combination thereof.

How To Activate A Preset


- 1] Search for the functionality you require.
- 2] Simply click **Apply Preset** to load the Preset and therefore activate the underlying configuration.

3] A new window opens. Confirm your choice via **Apply Preset** or abort the process via **Cancel**

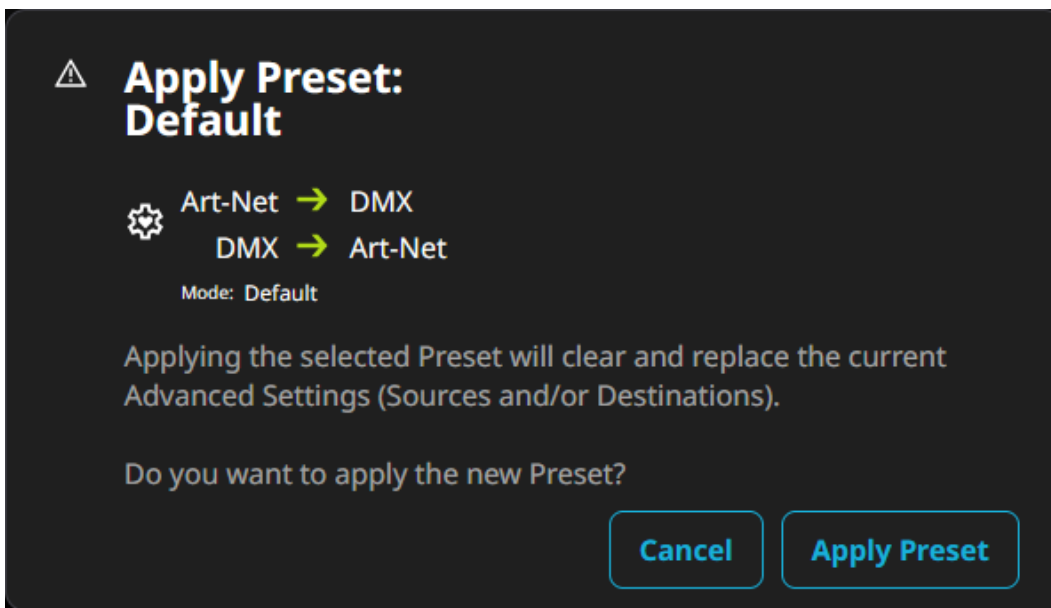

4] The currently active Preset is shown with a green glow.

[Note: The Presets **Clear Sources** and **Clear Destinations** will not show this glow as the exact state of configuration cannot be determined afterwards as different Sources and Destinations can still be configured.]

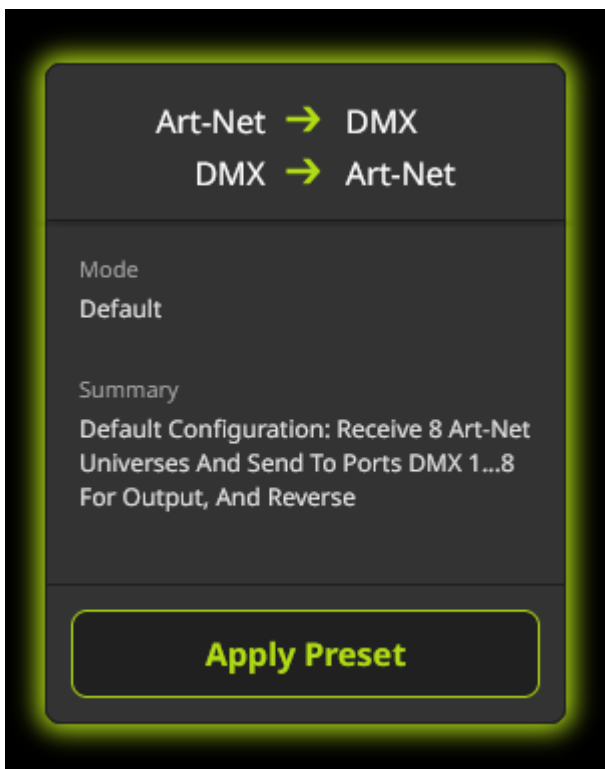

5] The menu » [Dashboard](#) also shows if a Preset is currently active and which Preset that is.


6] You can view the applied configuration in all of its details in the menu » [Advanced](#) Configuration.

2.2.6 Advanced

This topic includes:

- [Overview](#)
- [Introduction](#)
- [Navigation](#)
- [Sources](#)
- [Destinations](#)
- [Configuration Tips](#)

Overview

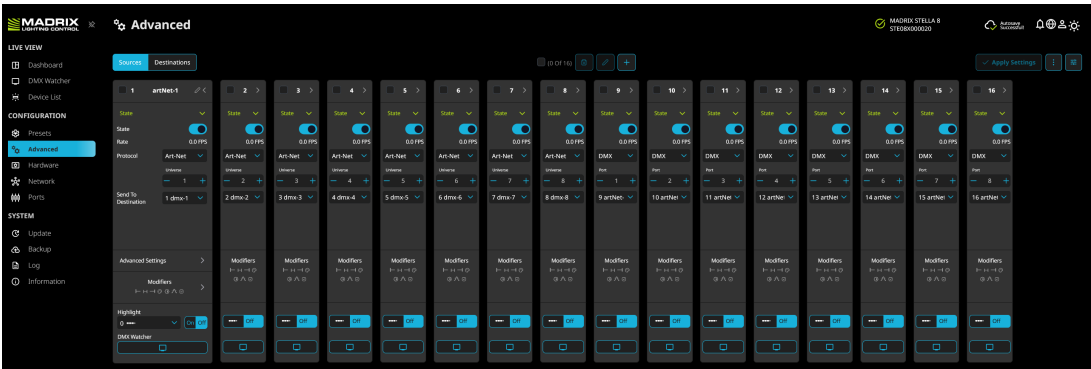

Introduction

The Advanced Configuration is *–the–* configuration section of MADRIX STELLA 8. While it can be complex, simple configurations as well as the most advanced and customized configurations are possible here.

- You can start by loading and customizing one of the Presets under menu » [Presets](#)
- Or you can create a new configuration from the beginning.

Make sure to click Apply Settings after making any changes. Otherwise, your changes will be discarded.

Navigation

Sources

Allows you to choose the view between Sources and Destinations.

Destinations

 (16 Of 16)

Allows you to select all Sources or Destinations.

Shows the number of currently selected Sources or Destinations, as well as the total number of added Sources or Destinations.




Delete - Removes all currently selected Sources or Destinations. Select one or more Sources or Destinations first.



Edit - Allows you to edit all currently selected Sources or Destinations [one item, or more items with multi-selection]. Select one or more Sources or Destinations first. A new window opens allowing you to edit the settings described below.



Add - Allows you to add new Sources or Destinations. A new window opens. [See below.]



Apply Settings - Becomes available once you have changed any of the settings and is visually highlighted to show that there are unsaved changes.

Make sure to click Apply Settings after making any changes.

In order to avoid data loss, your settings will be automatically saved when leaving the Advanced menu even if you have not applied your settings.



View - Quickly changes the tiles to show more or less information, and thus their size.

When minimizing tiles, the first tile will still be extended in order to see the section labels.

- **Expand All Sources**
- **Expand All Destinations**
- **Expand All Advanced Settings**
- **Expand All Modifiers**

- **Collapse All Sources**
- **Collapse All Destinations**
- **Collapse All Advanced Settings**
- **Collapse All Modifiers**



Filter - Allows you to change the view.


- **Sort By** - Arranges Sources based on **Destinations Ascending Order**, **Destinations Descending Order**, **Protocol**, or **State**. Or **Protocol** and **State** for Destinations.
- **State** - Only shows Sources or Destinations with **State On** or **State Off**.
- **Protocol** - Only shows Sources or Destinations with **Art-Net**, **DMX**, **sACN**, or **Pattern**.
- **Type** - Only shows the specific Source or Destination.
- **Reset All Filters** - Restores the original view and does not apply any filters or sorting.

Sources

- Sources define where the data is being received from.
- Up to 32 Sources can be configured.

Make sure to click Apply Settings after making any changes. Otherwise, your changes will be discarded.

General Settings



Selection - Allows you to select the specific Source.

Name - Allows you to change the name of the Source via left mouse double-click [with a maximum of 31 characters plus null]. Or leave the default name.

You can also click on the Edit icon [Pen symbol]. Apply your changes via keyboard shortcut Enter or click on the Checkmark symbol.

Collapsed/Extended View - Quickly changes the tile to show more or less information, and thus its size.

State

Allows you to enable or disable the specific Source.

Rate

Shows the rate at which data is being received in FPS [Frames Per Second].

Protocol

Defines the type of data source, including **Art-Net**, **DMX**, **sACN**, **Pattern** [including **Snapshots**].

MADRIX STELLA 8 supports Art-Net 4, in protocol version **DI**.

MADRIX STELLA 8 supports the Preview Flag of Streaming ACN [sACN] to discard data that is intended for visualization purposes only.

Index

Defines the index of the data source:

- **Universe** for Art-Net, ranging from 1 to 32,767.
- **Port** for DMX, ranging from 1 to 8 referring to the physical ports of the controller.
- **Universe** for sACN, ranging from 1 to 63,999.
- **Index** number for Pattern, ranging from 0 to 58.
 - 0 is All, 01-32 are Snapshots [if available], 33-58 are other Patterns.

- See menu » [DMX Watcher](#) [for more information about Snapshots]
- See [Highlight](#) [for more information about all available Patterns]

Send To Destination

Defines to which configured Destination the received data is being sent to.

See [Destinations](#)

Advanced Settings

Repeat Last Frame

If the data source is sending at a slow frame rate:

- The controller will repeat the last frame until a new frame is received [in order to achieve the desired output frame rate of the Destination].

If the connection to the data source has been lost:

- The controller will repeat the last frame that has been received.

For Patterns, including Snapshots:


- Cannot be disabled since the controller automatically creates a loop and always repeats the scene.

Limit To IP Address

Allows you to enter a specific IP address of your sender, when you wish to receive only from this single source.



Select IP Address - Opens the IP-address selection to quickly change the IP address. A new window opens:

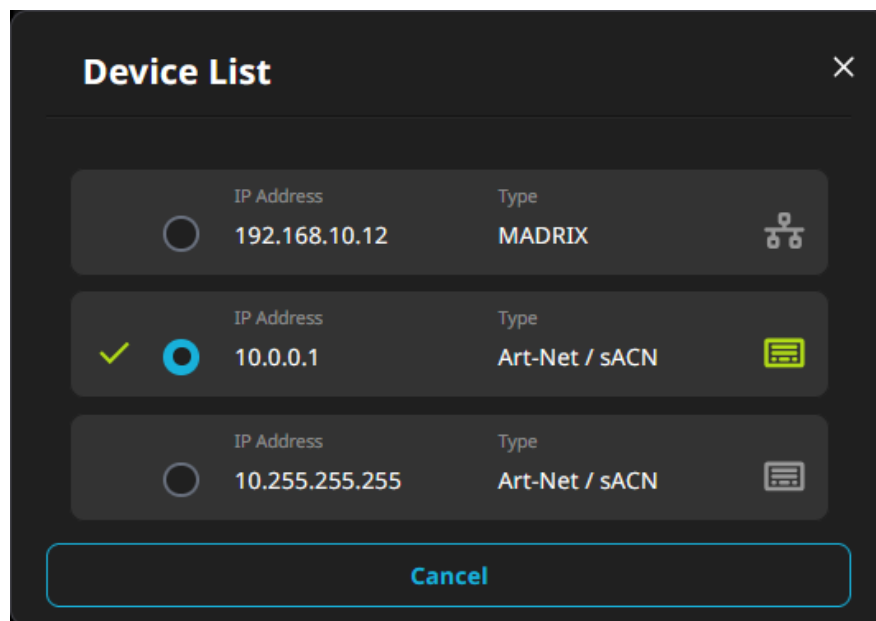

Select a device/IP address from the list by clicking on it:

Blue/Green - Shows the currently set IP address.

 - Shows IP addresses/devices that have been found in the network [see »[Device List](#)].

 - Shows IP addresses that have been manually set in the Sources.

Abort the process with **Cancel**

Limit To Mode

For Art-Net, choose between:

- **Unicast** - Receives only Unicast Art-Net data from one sender, e.g. your MADRIX computer.
- **Broadcast** - Receives Art-Net data from all IP addresses in the network.
- **Unicast & Broadcast** - Receives from both.

For sACN, choose between:

- **Unicast** - Receives only Unicast sACN data from one sender, e.g. your MADRIX computer.
- **Multicast** - Receives sACN data from multiple IP addresses in the network.
- **Unicast & Multicast** - Receives from both.

Modifiers

Channels From Allows you to shift the received data [512 DMX channels] if required, and works in combination with **Within Range** and **Offset To**.
Defines with which channels to start the shifting.

Valid values range from 1 to 512.

The default setting is 1 / 0 / 1 for all three modifiers, and thus no shifting is taking place by default.

Within Range Allows you to shift the received data [512 DMX channels] if required, and works in combination with **Channels From** and **Offset To**.
Defines how many channels will be shifted.

Valid values range from 0 to 512. 0 means **Automatic**. 512 means **Full** Frames.

The default setting is 1 / 0 / 1 for all three modifiers, and thus no shifting is taking place by default.

Optimized Frames / Full Frames:

- Set **Channels From 1, Within Range 0, Offset To 1** in order to receive **Optimized Frames**.
- Set **Channels From 1, Within Range 512, Offset To 1** in order to receive **Full Frames**.

Offset To Allows you to shift the received data [512 DMX channels] if required, and works in combination with **Channels From** and **Within Range**.
Defines to which channels the data is shifted.
Empty channels will be filled with DMX value 0.

Valid values range from 1 to 512.

The default setting is 1 / 0 / 1 for all three modifiers, and thus no shifting is taking place by default.

Color Order Changes the order of channels.

- **Original** [meaning RGB would be 1-2-3, or RGBW would be 1-2-3-4]
- **1-3-2** [meaning the third channel is changed to position 2]
- **2-1-3** [meaning the first channel is changed to position 2]

- **2-3-1** [meaning the first channel is changed to position 3]
- **3-1-2** [meaning the third channel is changed to position 1]
- **3-2-1** [meaning the channel order is inverse for all three channels]
- **1-3-2-4** [meaning the third channel is changed to position 2]
- **2-1-3-4** [meaning the first channel is changed to position 2]
- **2-3-1-4** [meaning the first channel is changed to position 3]
- **3-1-2-4** [meaning the third channel is changed to position 1]
- **3-2-1-4** [meaning the first channel and third channel are being swapped]
- **4-1-2-3** [meaning the fourth channel is changed to position 1]
- **4-1-3-2** [meaning the fourth channel is changed to position 1 and the second channel is changed to position 4]
- **4-2-1-3** [meaning the fourth channel is changed to position 1 and the first channel is changed to position 3]
- **4-2-3-1** [meaning the fourth channel is changed to position 1 and the first channel is changed to position 4]
- **4-3-1-2** [meaning the fourth channel is changed to position 1 and the third channel is changed to position 2]
- **4-3-2-1** [meaning the channel order is inverse for all four channels]

Brightness

Sets the brightness level of the output [towards the LED fixtures by functioning as a dimmer].

For example, when the controller receives a DMX value of 255 on a channel, this would be dimmed to 127 when the Output Intensity is set to 50 %.

- Valid values range from 10 % to 100 %.
- The default value is 100 %.
- Can be used alone or at the same time as Intensity Limit. First, the controller applies the Brightness. Second, the Intensity Limit is applied.

**Intensity
Limit**

Sets the maximum brightness level that can be sent.

- Valid values ranges from 1 to 255.
- The default value is 255.
- Can be used alone or at the same time as Brightness. First, the controller applies the Brightness. Second, the Intensity Limit is applied.

Priority

Allows you to set a custom priority for this Source.

This is especially useful when creating individual backup strategies with different data sources, i.e. a data source with a lower priority should take over once a data source with a higher priority is no longer available.

- Valid values range from 0 to 200.
- The default value is 0 [**Disabled**]. This means the default priorities will be assigned automatically:
 - The default value for Protocol Art-Net is 100.
 - The default value for Protocol DMX is 100.
 - The default value for Protocol sACN is 100.
 - The default value for Protocol Pattern is 100.
 - The default value for feature Highlight is 250.
 - The default value for feature Repeat Last Frame is 1.

Highlight

Highlight

On / Off - Allows you to enable or disable channel highlighting on the specific Source.
[512 channels are sent per port.]

Highlight is automatically being switched off when changing to a different view or menu point in the Web Panel.

Use this workflow:

- 1]** Choose one of the built-in **Patterns**
- 2]** Activate **On**
- 3]** To deactivate again, choose Pattern **Black**
- 4]** Set to **Off**

You can choose from the following Patterns:

- **0**  **All**: Sets DMX value 255 for all 512 channels. This is the default pattern.
- **01 – 32**  **Snapshots 01 – 32**: Only available when created by you. See »[Creating Snapshots](#)
- **33**  **Black**: Sets DMX value 0 for all 512 channels.

- **34 ■■■ First Of Three:** Sets DMX value 255 for every third channel, starting with channel 1 [i.e. Red for RGB LEDs].
- **35 □■■ Second Of Three:** Sets DMX value 255 for every third channel, starting with channel 2 [i.e. Green for RGB LEDs].
- **36 ■■■ First And Second Of Three:** Sets DMX value 255 for every third channel, starting with channel 1 and 2 [i.e. Red and Green for RGB LEDs].
- **37 □■■ Third Of Three:** Sets DMX value 255 for every third channel, starting with channel 3 [i.e. Blue for RGB LEDs].
- **38 ■■■ First And Third Of Three:** Sets DMX value 255 for every third channel, starting with channel 1 and 3 [i.e. Red and Blue for RGB LEDs].
- **39 □■■ Second And Third Of Three:** Sets DMX value 255 for every third channel, starting with channel 2 and 3 [i.e. Green and Blue for RGB LEDs].
- **40 ■■■■ First Of Four:** Sets DMX value 255 for every fourth channel, starting with channel 1 [i.e. Red for RGBW LEDs].
- **41 □■■■ Second Of Four:** Sets DMX value 255 for every fourth channel, starting with channel 2 [i.e. Green for RGBW LEDs].
- **42 □■■■ Third Of Four:** Sets DMX value 255 for every fourth channel, starting with channel 3 [i.e. Blue for RGBW LEDs].
- **43 □■■■ Fourth Of Four:** Sets DMX value 255 for every fourth channel, starting with channel 4 [i.e. White for RGBW LEDs].
- **44 ■■■ 3-Channel Fill:** Sets DMX value 255 for the color channels, by switching through them: channel 1, channel 2, channels 1+2, channel 3, channels 1+3, channels 2+3 [thereby switching through the previous highlighting presets].
- **45 ■■■ 3-Channel Run:** Sets DMX value 255 for the color channels, by looping through each single one of them: channel 1, channel 2, channel 3 [i.e. first Red, second Green, third Blue, fourth Red, fifth Green, sixth Blue, and so on].
- **46 ■■■■ 4-Channel Fill:** Sets DMX value 255 for the color channels, by switching through them: channel 1, channel 2, channels 1+2, channel 3, channels 1+3, channels 2+3, channels 1+2+3, channel 4, channels 1+4, channels 2+4, channels 1+2+4, channels 3+4, channels 1+3+4, channels 2+3+4, channels, 1+2+3+4, all off.
- **47 ■■■■ 4-Channel Run:** Sets DMX value 255 for the color channels, by looping through each single one of them: channel 1, channel 2, channel 3, channel 4 [i.e. first Red, second Green, third Blue, fourth White, fifth Red, sixth Green, seventh Blue, eighth White, and so on].
- **48 □□ Stepping Channels:** Sets DMX value 255 for every single channel, one channel at a time, consecutively.

- **49**  **3-Channel Fading Fill**: Is the **3-Channel Fill** preset, but values are faded [slowly increased and decreased] instead of hard cuts.
- **50**  **3-Channel Fading Run**: Is the **3-Channel Run** preset, but values are faded [slowly increased and decreased] instead of hard cuts.
- **51**  **4-Channel Fading Fill**: Is the **4-Channel Fill** preset, but values are faded [slowly increased and decreased] instead of hard cuts.
- **52**  **4-Channel Fading Run**: Is the **4-Channel Run** preset, but values are faded [slowly increased and decreased] instead of hard cuts.
- **53**  **Fading Channels**: Is the **Stepping Channels** preset, but values are faded [slowly increased and decreased] instead of hard cuts.
- **54**  **Ramp All**: Fades all channels at the same time from and to DMX value 255 [i.e. White for RGB LEDs].
- **55**  **Ramp Wave**: Creates a wave animation across all channels [i.e. White for RGB LEDs].
- **56**  **1 Ch. Blink, Remainder Black**: Lets the first channel blink and sets DMX value 0 for all other channels.
- **57**  **1 Ch. Blink, Remainder White**: Lets the first channel blink and sets DMX value 255 for all other channels.
- **58**  **Blink All**: Lets all channels blink.

DMX Watcher

DMX Watcher Opens the DMX Watcher menu item in order to monitor incoming data live.


See menu » [DMX Watcher](#)



Adding New Sources

- **1]** Click +

- **2]** A new window opens.

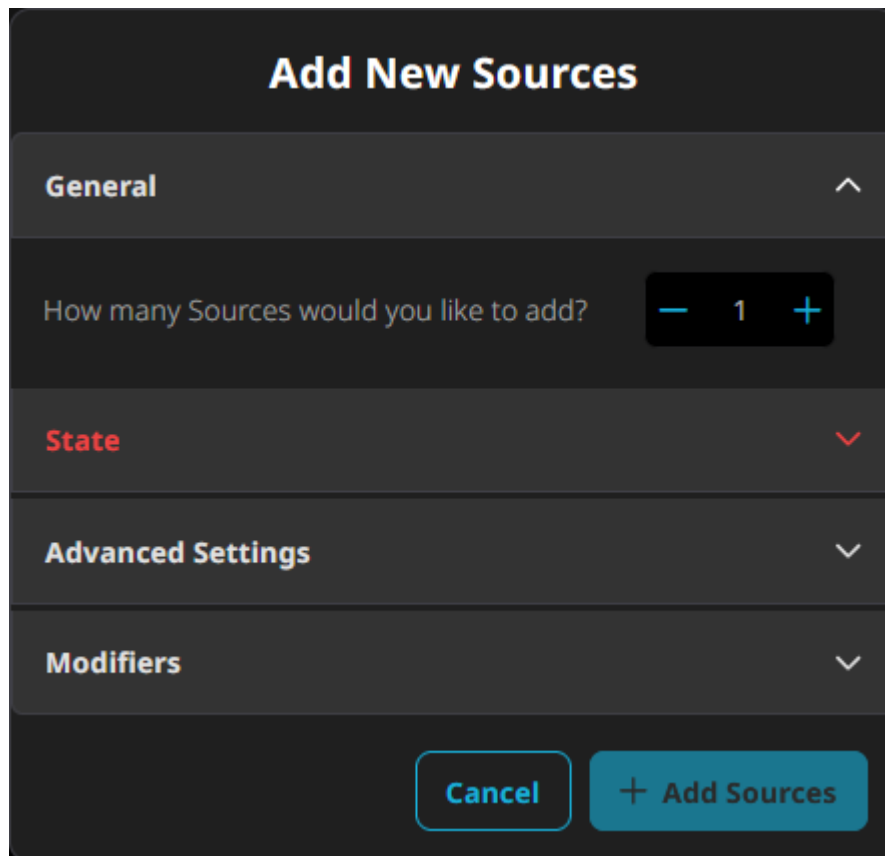


- **3]** *How many Sources would you like to add?* - Defines the number of new Sources that will be added.
- **4]** Set up **State**, **Advanced Settings**, and **Modifiers** as explained above. You can also change all settings afterwards. State > Send To Destination is required here.
- **5]** Click + **Add Sources** in order to confirm.

Destinations

- Destinations define where the data is being sent to.
- Up to 32 Destinations can be configured.

Make sure to click Apply Settings after making any changes. Otherwise, your changes will be discarded.

General Settings



Selection - Allows you to select the specific Destination.

Name - Allows you to change the name of the Destination via left mouse double-click [with a maximum of 31 characters plus null]. Or leave the default name.

Collapsed/Extended View - Quickly changes the tile to show more or less information, and thus its size.

State Allows you to enable or disable the specific Destination.

Rate Shows the rate at which data is being processed or sent in FPS [Frames Per Second].

- You can see the final output rate, especially that of DMX, by using the » [DMX Watcher](#) or » [Ports](#)

Protocol Defines the type of data output, including **Art-Net**, **DMX**, **sACN**.

Index Defines the index of the data output:

- **Universe** for Art-Net, ranging from 1 to 32,767.
- **Port** for DMX, ranging from 1 to 8 referring to the physical ports of the controller.
- **Universe** for sACN, ranging from 1 to 63,999.

Advanced Settings

Art-Net

LTP Applies the Latest Takes Precedence principle.
Is especially useful when sending multiple data sources to a single Source or multiple Sources to a single Destination for Merging.
When activated, the last received package will always win; basically meaning that there is no merge!

If ArtSync is received continuously from one data source, the first data source will be locked in and it will win against other data sources.

If LTP is disabled, i.e. in all other cases, Destinations are applying HTP merging!

Mode

Choose between

- **Unicast** - Sends Art-Net data or sACN data only to one receiver. Enter the IP address of your receiver in the IP Address field below.
- **Broadcast** - Sends Art-Net data to all IP addresses in the network.
This is the default setting.
- **Multicast** - Sends sACN data to all recipients in the network.


IP Address

Allows you to enter a specific IP address of your receiver, when you wish to send data in Unicast mode [see below].

The default value is 10.255.255.255 [for Broadcast].



Select IP Address - Opens the IP-address selection to quickly change the IP address. A new window opens:

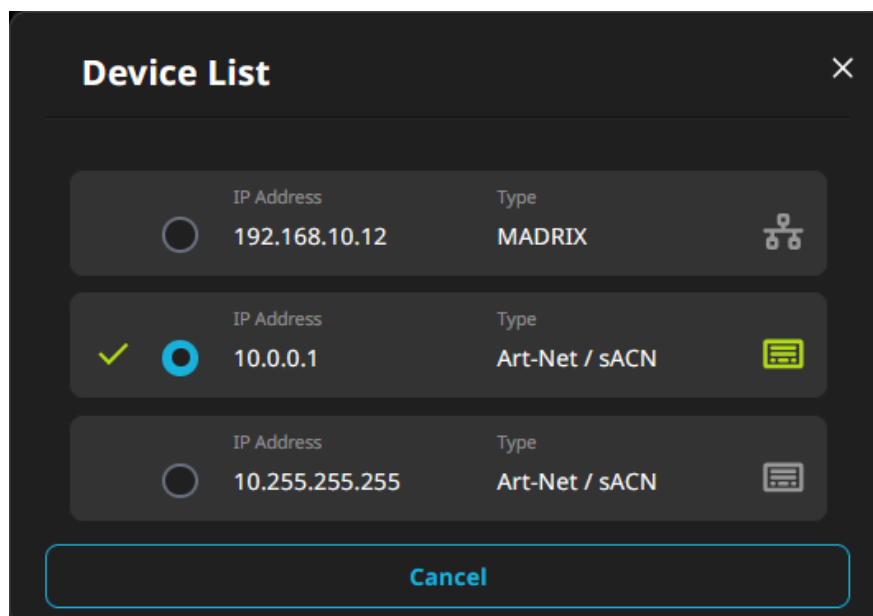

Select a device/IP address from the list by clicking on it:

Blue/Green - Shows the currently set IP address.

 - Shows IP addresses/devices that have been found in the network [see » [Device List](#)].

 - Shows IP addresses that have been manually set in the Destinations.

Abort the process with **Cancel**

Send Over Ethernet Sends Art-Net data over the Ethernet ports of the controller.

Send Over USB (Virt. Ethernet) Sends Art-Net data over the USB ports of the controller via the virtual Ethernet link.

DMX

LTP Applies the Latest Takes Precedence principle.
Is especially useful when sending multiple data sources to a single Source or multiple Sources to a single Destination for Merging.
When activated, the last received package will always win; basically meaning that there is no merge!

If ArtSync is received continuously from one data source, the first data source will be locked in and it will win against other data sources.

If LTP is disabled, i.e. in all other cases, Destinations are applying HTP merging!

sACN

LTP Applies the Latest Takes Precedence principle.
Is especially useful when sending multiple data sources to a single Source or multiple Sources to a single Destination for Merging.
When activated, the last received package will always win; basically meaning that there is no merge!


If ArtSync is received continuously from one data source, the first data source will be locked in and it will win against other data sources.

If LTP is disabled, i.e. in all other cases, Destinations are applying HTP merging!

IP Address Allows you to enter a specific IP address of your receiver, when you wish to send data in Unicast mode [see below].



Select IP Address - Opens the IP-address selection to quickly change the IP address. A new window opens:

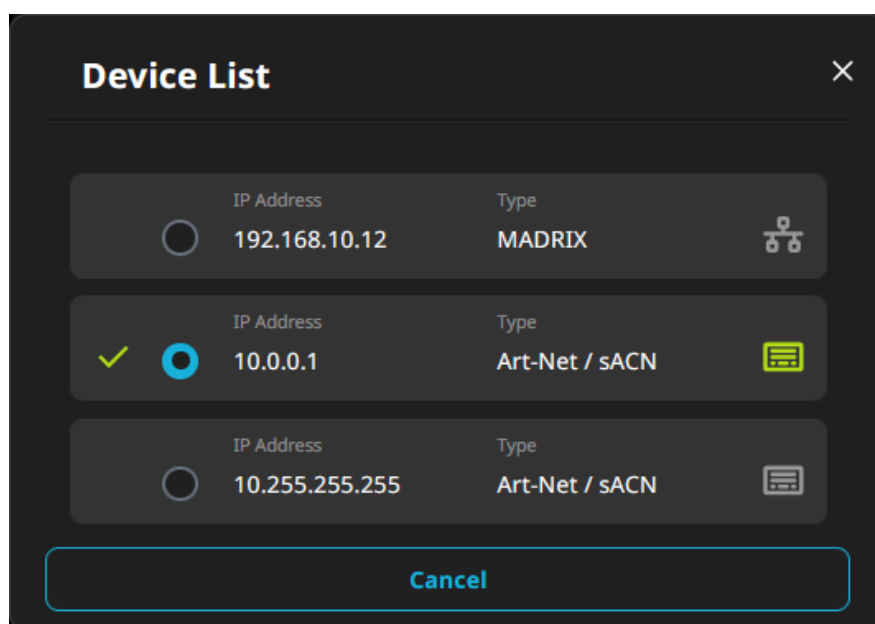

Select a device/IP address from the list by clicking on it:

Blue/Green - Shows the currently set IP address.

- Shows IP addresses/devices that have been found in the network [see »[Device List](#)].

- Shows IP addresses that have been manually set in the Sources.

Abort the process with **Cancel**

Mode Choose between

- **Unicast** - Sends sACN data only to one receiver. Enter the IP address of your receiver in the above IP Address field.
- **Multicast** - Sends sACN data to all sACN devices in the network.
This is the default setting.

Send Over Ethernet	Sends sACN data over the Ethernet ports of the controller.
Send Over USB (Virt. Ethernet)	Sends sACN data over the USB ports of the controller via the virtual Ethernet link.

Modifiers

Channels From	Allows you to shift the sent data [512 DMX channels] if required, and works in combination with Within Range and Offset To . Defines with which channels to start the shifting.
----------------------	--

Valid values range from 1 to 512.

The default setting is 1 / 0 / 1 for all three modifiers, and thus no shifting is taking place by default.

Within Range	Allows you to shift the received data [512 DMX channels] if required, and works in combination with Channels From and Offset To . Defines how many channels will be shifted.
---------------------	---

Valid values range from 0 to 512. 0 means **Automatic**. 512 means **Full** Frames.

The default setting is 1 / 0 / 1 for all three modifiers, and thus no shifting is taking place by default.

Optimized Frames / Full Frames:

- Set **Channels From 1, Within Range 0, Offset To 1** in order to receive **Optimized Frames**.
- Set **Channels From 1, Within Range 512, Offset To 1** in order to receive **Full Frames**.

Offset To	Allows you to shift the sent data [512 DMX channels] if required, and works in combination with Channels From and Within Range . Defines to which channels the data is shifted. Empty channels will be filled with DMX value 0.
------------------	---

Valid values range from 1 to 512.

The default setting is 1 / 0 / 1 for all three modifiers, and thus no shifting is taking place by default.

Note: For example, this allows you to spread the same universe over different output ports using different offsets.

Color Order Changes the order of channels.

- **Original** [meaning RGB would be 1-2-3, or RGBW would be 1-2-3-4]
- **1-3-2** [meaning the third channel is changed to position 2]
- **2-1-3** [meaning the first channel is changed to position 2]
- **2-3-1** [meaning the first channel is changed to position 3]
- **3-1-2** [meaning the third channel is changed to position 1]
- **3-2-1** [meaning the channel order is inverse for all three channels]
- **1-3-2-4** [meaning the third channel is changed to position 2]
- **2-1-3-4** [meaning the first channel is changed to position 2]
- **2-3-1-4** [meaning the first channel is changed to position 3]
- **3-1-2-4** [meaning the third channel is changed to position 1]
- **3-2-1-4** [meaning the first channel and third channel are being swapped]
- **4-1-2-3** [meaning the fourth channel is changed to position 1]
- **4-1-3-2** [meaning the fourth channel is changed to position 1 and the second channel is changed to position 4]
- **4-2-1-3** [meaning the fourth channel is changed to position 1 and the first channel is changed to position 3]
- **4-2-3-1** [meaning the fourth channel is changed to position 1 and the first channel is changed to position 4]
- **4-3-1-2** [meaning the fourth channel is changed to position 1 and the third channel is changed to position 2]
- **4-3-2-1** [meaning the channel order is inverse for all four channels]

Brightness Sets the brightness level of the output [towards the LEDs by functioning as a dimmer]. For example, when the controller receives a DMX value of 255 on a channel, this would be dimmed to 127 when the Output Intensity is set to 50 %.

- Valid values range from 10 % to 100 %.

- The default value is 100 %.
- Can be used alone or at the same time as Intensity Limit. First, the controller applies the Brightness. Second, the Intensity Limit is applied.

Intensity Limit

Sets the maximum brightness level that can be sent.

- Valid values ranges from 1 to 255.
- The default value is 255.
- Can be used alone or at the same time as Brightness. First, the controller applies the Brightness. Second, the Intensity Limit is applied.

Highlight

Highlight

On / Off - Allows you to enable or disable channel highlighting on the specific Destination.

[512 channels are sent per port.]

Highlight is automatically being switched off when changing to a different view or menu point in the Web Panel.

Use this workflow:

- 1]** Choose one of the built-in **Patterns**
- 2]** Activate **On**
- 3]** To deactivate again, choose Pattern **Black**
- 4]** Set to **Off**

You can choose from the following Patterns:

- **0**  **All**: Sets DMX value 255 for all 512 channels. This is the default pattern.
- **01 – 32**  **Snapshots 01 – 32**: Only available when created by you. See » [Creating Snapshots](#)
- **33**  **Black**: Sets DMX value 0 for all 512 channels.
- **34**  **First Of Three**: Sets DMX value 255 for every third channel, starting with channel 1 [i.e. Red for RGB LEDs].
- **35**  **Second Of Three**: Sets DMX value 255 for every third channel, starting with channel 2 [i.e. Green for RGB LEDs].

- **36 ■■■ First And Second Of Three:** Sets DMX value 255 for every third channel, starting with channel 1 and 2 [i.e. Red and Green for RGB LEDs].
- **37 □■■ Third Of Three:** Sets DMX value 255 for every third channel, starting with channel 3 [i.e. Blue for RGB LEDs].
- **38 ■■■ First And Third Of Three:** Sets DMX value 255 for every third channel, starting with channel 1 and 3 [i.e. Red and Blue for RGB LEDs].
- **39 □■■ Second And Third Of Three:** Sets DMX value 255 for every third channel, starting with channel 2 and 3 [i.e. Green and Blue for RGB LEDs].
- **40 ■■■ First Of Four:** Sets DMX value 255 for every fourth channel, starting with channel 1 [i.e. Red for RGBW LEDs].
- **41 □■■ Second Of Four:** Sets DMX value 255 for every fourth channel, starting with channel 2 [i.e. Green for RGBW LEDs].
- **42 □■■ Third Of Four:** Sets DMX value 255 for every fourth channel, starting with channel 3 [i.e. Blue for RGBW LEDs].
- **43 □■■ Fourth Of Four:** Sets DMX value 255 for every fourth channel, starting with channel 4 [i.e. White for RGBW LEDs].
- **44 ■■■ 3-Channel Fill:** Sets DMX value 255 for the color channels, by switching through them: channel 1, channel 2, channels 1+2, channel 3, channels 1+3, channels 2+3 [thereby switching through the previous highlighting presets].
- **45 ■■■ 3-Channel Run:** Sets DMX value 255 for the color channels, by looping through each single one of them: channel 1, channel 2, channel 3 [i.e. first Red, second Green, third Blue, fourth Red, fifth Green, sixth Blue, and so on].
- **46 ■■■ 4-Channel Fill:** Sets DMX value 255 for the color channels, by switching through them: channel 1, channel 2, channels 1+2, channel 3, channels 1+3, channels 2+3, channels 1+2+3, channel 4, channels 1+4, channels 2+4, channels 1+2+4, channels 3+4, channels 1+3+4, channels 2+3+4, channels, 1+2+3+4, all off.
- **47 ■■■ 4-Channel Run:** Sets DMX value 255 for the color channels, by looping through each single one of them: channel 1, channel 2, channel 3, channel 4 [i.e. first Red, second Green, third Blue, fourth White, fifth Red, sixth Green, seventh Blue, eighth White, and so on].
- **48 □□ Stepping Channels:** Sets DMX value 255 for every single channel, one channel at a time, consecutively.
- **49 ■■■ 3-Channel Fading Fill:** Is the **3-Channel Fill** preset, but values are faded [slowly increased and decreased] instead of hard cuts.
- **50 ■■■ 3-Channel Fading Run:** Is the **3-Channel Run** preset, but values are faded [slowly increased and decreased] instead of hard cuts.

- **51**  **4-Channel Fading Fill**: Is the **4-Channel Fill** preset, but values are faded [slowly increased and decreased] instead of hard cuts.
- **52**  **4-Channel Fading Run**: Is the **4-Channel Run** preset, but values are faded [slowly increased and decreased] instead of hard cuts.
- **53**  **Fading Channels**: Is the **Stepping Channels** preset, but values are faded [slowly increased and decreased] instead of hard cuts.
- **54**  **Ramp All**: Fades all channels at the same time from and to DMX value 255 [i.e. White for RGB LEDs].
- **55**  **Ramp Wave**: Creates a wave animation across all channels [i.e. White for RGB LEDs].
- **56**  **1 Ch. Blink, Remainder Black**: Lets the first channel blink and sets DMX value 0 for all other channels.
- **57**  **1 Ch. Blink, Remainder White**: Lets the first channel blink and sets DMX value 255 for all other channels.
- **58**  **Blink All**: Lets all channels blink.

DMX Watcher

DMX Watcher Opens the DMX Watcher menu item in order to monitor incoming data live.


See menu » [DMX Watcher](#)



Adding New Destinations

- **1]** Click +

- **2]** A new window opens.

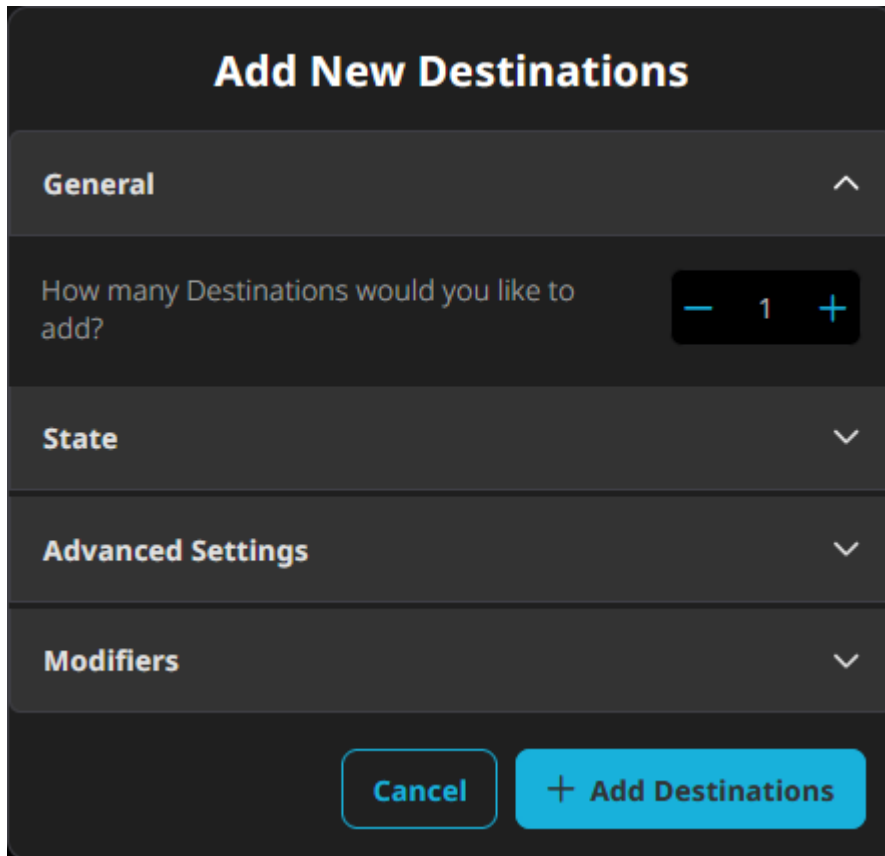

- **3]** *How many Destinations would you like to add?* - Defines the number of new Destinations that will be added.
- **4]** Set up **State**, **Advanced Settings**, and **Modifiers** as explained above. You can also change all settings afterwards.
- **5]** Click + **Add Destinations** in order to confirm.

Configuration Tips

Use the built-in Presets to quickly get started!

DMX Controller — Output/DMX-OUT

- Setting up eDMX Sources and sending them to DMX Destinations.
- For each received universe, choose your Source: Protocol, i.e. Art-Net or sACN.

- Set up the number of required DMX ports = number of Destinations with Protocol DMX and index 01 – 08.

DMX Controller – Input/DMX-IN

- Setting up DMX Sources and sending them to eDMX Destinations.
- If DMX to eDMX is also configured, DMX-IN automatically becomes active if no eDMX is sent to the device and DMX is received on the DMX ports.
- Set up the number of receiving DMX ports = number of Sources with Protocol DMX and index 01 – 08.
- For each received universe, set up a Destination with Destination: Protocol, i.e. Art-Net or sACN.

DMX Splitter

- Setting up single DMX Sources and sending them multiple times to several DMX Destinations.
- Set up the number of required DMX ports = number of Destinations with Protocol DMX. For 4 output ports, use index 05 – 08, for example.
- Set up 4 Sources with Protocol: DMX and Index 01 and send to each of the 4 different Destinations, for example.

DMX Booster

- Setting up several DMX Sources and sending them to several DMX Destinations.
- Each different Source: Protocol DMX has one different Destination: Protocol DMX, such as Index 1 [Source] to Index 2 [Destination], Index 3 [Source] to Index 4 [Destination], Index 5 [Source] to Index 6 [Destination], Index 7 [Source] to Index 8 [Destination].

Protocol Converter

- Setting up eDMX Sources and sending them to eDMX Destinations.
- For every required Source/Destination universe, choose Source: Protocol Art-Net and then Destination: Protocol sACN; or choose Source: Protocol sACN and then Destination: Protocol Art-Net.

Backup Strategies

- Using the special Priority feature of the controller to assign staggered priority levels to different Sources.
- Set up additional Sources with a lower Priority than the default priority [as described above] and they will be used instead after having received no signal for 3 seconds.

Merger – DMX/eDMX

- Sending multiple data sources to single Sources and/or sending multiple Sources to Destinations.

- You can send up to 8 different data sources [with different IP addresses] to a single Source.
- Up to 8 different Sources can be sent to a single Destination.
- Destinations are always applying HTP merging; except when LTP is enabled.

In Case Of Missing Network Data

- You can set up an extra Source with Pattern 33 Black or 0 All and give it a lower Priority [than your main Source] in order to send a last black or white frame after the connection to your main data source has been lost.

Important Notes


- When receiving Art-Net and sending data out as Art-Net again [e.g. DMX to Art-Net, or Art-Net to Art-Net], make sure that your output universes are ~~not~~ the same as your input universes; or otherwise you will create a loop.

2.2.7 Hardware

This topic includes:

- [Overview](#)
- [General Settings](#)
- [RDM For Internal Sensor Data And Device Status](#)
- [Autosave](#)
- [Special Commands](#)

Overview

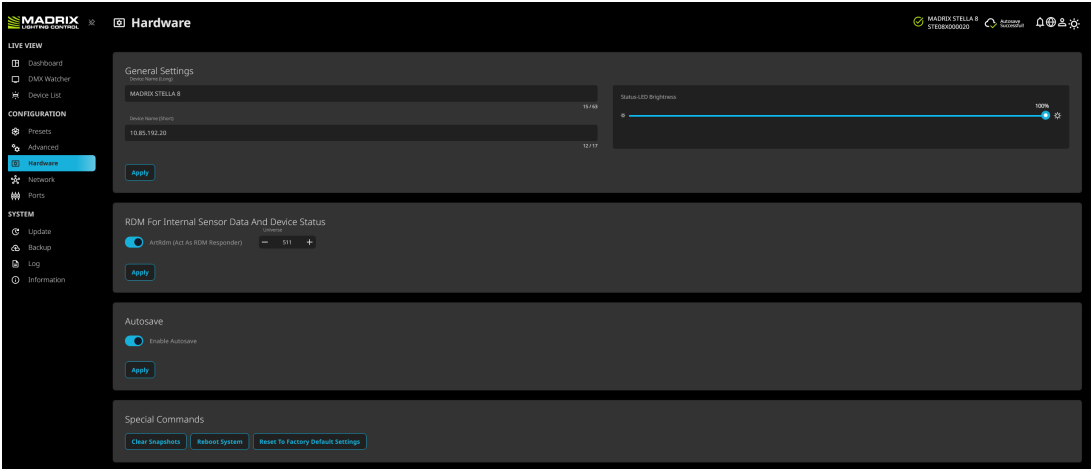

General Settings

- Device Name (Long)**

This refers to Long Name identifier used by Art-Net [with a maximum of 63 characters plus null].

Also refers to DEVICE_LABEL within the RDM specifications [with a maximum of 31 characters plus null].

The default value is MADRIX STELLA 8.

This identifier is also used as the Web Panel's title in the tab of the web browser.
- Device Name (Short)**

This refers to Short Name identifier used by Art-Net [with a maximum of 17 characters plus null].

The default value is the IP address of this controller, e.g. 10.85.192.0.
- Status-LED Brightness**

Sets the maximum brightness level of the controller's physical status LEDs.

Valid values range from 10 % to 100 %.

The default value is 100 %.

Confirm any changes with **Apply**

RDM For Internal Sensor Data And Device Status

ArtRdm (Act As RDM Responder)

Allows you to enable or disable ArtRdm.

By default, this setting is enabled.

ArtRdm allows the device to be able to reply to RDM requests by an RDM Controller as an RDM Responder over Art-Net with its status and sensor data.

This enables monitoring of the MADRIX STELLA 8 via RDM, such as the MADRIX RADAR Software.

MADRIX STELLA 8 mainly provides data regarding:

- Various Temperature Values
- Various Voltage Values
- Device Model [incl. Hardware Revision]
- Software Version [of the Firmware and Bootloader]
- And other device information, such as IP Address, Device Short/Long Name, etc.
- Learn more » [Using RDM And MADRIX RADAR](#)

Universe

Defines the universe on which sensor data is relayed.

Valid values range from 0 to 32767.

The default value is 511. [Which is universe 512 for 1-based indexes.]

Confirm any changes with **Apply**

Autosave

Enable

Allows you to enable or disable the automatic saving feature.

Autosave

This makes sure that settings are automatically saved on the device after making changes in the web panel.

You can also quickly change this setting in the top menu under 

Confirm any changes with **Apply**

Special Commands

**Clear
Snapshots** Deletes all Snapshots you have created from the controller.
Confirm your choice via **Delete** or abort the process via **Cancel**

Learn more under menu » [DMX Watcher](#)

**Reboot
System** Restarts the controller completely.
Confirm your choice via **Reboot** or abort the process via **Cancel**

[The website will automatically be reloaded after 30 seconds.]

**Reset To
Factory
Default
Settings** Restores the original settings of the controller.
[Snapshots will also be cleared.]
Confirm your choice via **Reset Settings** or abort the process via **Cancel**

The MADRIX Logo on the controller will flash repeatedly during the short process.

[Since this will change back the IP address to the original setting, the web panel will automatically be reloaded after a few seconds and you will automatically be redirected to the correct web panel and IP address.]


2.2.8 Network

This topic includes:

- [Overview](#)
- [Ethernet Settings](#)
- [Settings USB-C Front / Settings USB-C Side](#)

- [Fixing Routing Conflicts](#)
- [Web Panel Access Control](#)
- [syslog](#)
- [Tools](#)

Overview

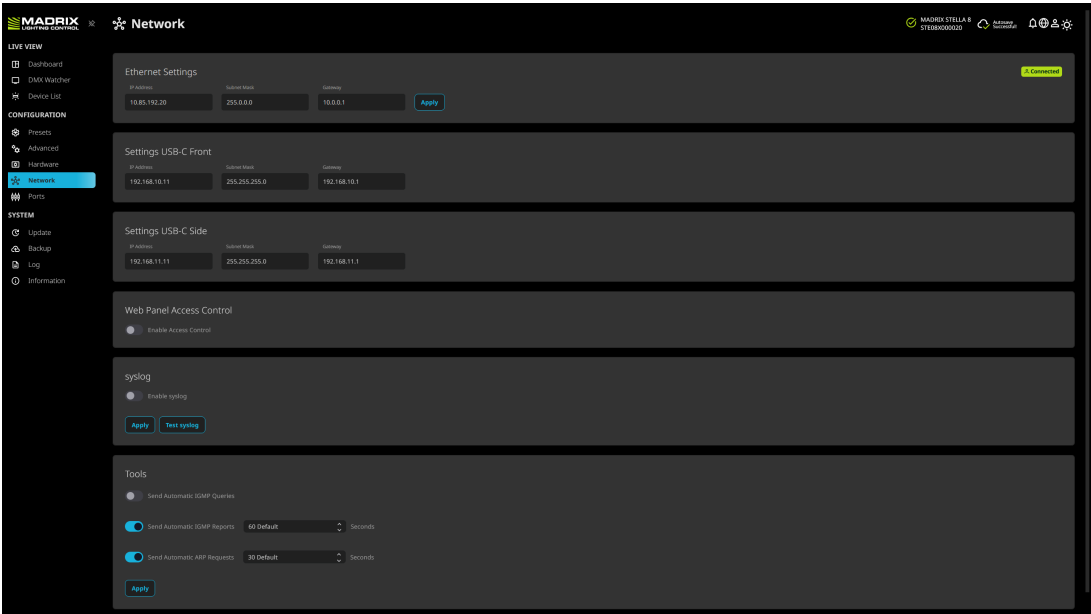

Ethernet Settings

You can change the essential network device settings if required.

IP Address Is an identifier for devices that enables network communication. When using network protocols, it needs to be unique and set up for each individual sender or recipient in the network.

This also facilitates access to the web panel of the controller when connected over Ethernet network.

- By default, your controller already has set a valid IP address [for example, **10.85.192.0**].

Subnet Mask Is a technical grouping mechanism for network devices. When using network protocols, it needs to be set up for each sender or recipient in the network for correct data routing.

- Your devices and the sender, such as the computer that runs the MADRIX 5 Software, need to have the same subnet mask!
- By default, your controller already has set a valid subnet mask [**255.0.0.0**].

Gateway Is a technical routing mechanism for Ethernet networks, which acts as the main receiver in case the original network recipients are not available anymore, i.e. it is the fallback address of the network.

- When using network protocols, it needs to be in the same network as the IP address and in this way set up correctly for network communication to work.
- By default, your controller already has set a valid gateway [**10.0.0.1**].



Shows that you are currently accessing the controller's web panel via this connection type [Ethernet].

Confirm any changes with **Apply**

The Network Settings are essential device settings!

Changing them may prevent you from connecting to the controller's web panel until you adjust the network settings of the computer/mobile device you are accessing it with.

Settings USB-C Front / Settings USB-C Side

The following settings cannot be changed.

When connecting to MADRIX STELLA 8 over USB, a virtual Ethernet connection will be automatically created by the accessing device (Windows, macOS, Android, iOS). No further configuration is necessary! This allows you to access the unit via its web panel and send/receive data as if directly connected over Ethernet computer network.

If you cannot reach your unit via the IP address you are entering, try the connection via USB-C. The accessing device (Windows, macOS, Android, iOS) and controller will automatically create a network over USB by using a virtual link. There is no configuration needed! The controller has fixed IP addresses for each USB-C port, that cannot be changed and therefore are permanently accessible:

IP Address Shows the IP address of the USB-C Front port.

USB-C Front

- It is a fixed setting with **192.168.10.11**
- The computer/mobile device counterpart is then 192.168.10.12

Subnet Mask Shows the subnet mask of the USB-C Front port.

USB-C Front

- It is a fixed setting with **255.255.255.0**

Gateway Shows the gateway of the USB-C Front port.

USB-C Front

- It is a fixed setting with **192.168.10.1**

IP Address Shows the IP address of the USB-C Side port.

USB-C Side

- It is a fixed setting with **192.168.11.11**
- The computer/mobile device counterpart is then 192.168.11.12

Subnet Mask Shows the subnet mask of the USB-C Side port.

USB-C Side

- It is a fixed setting with **255.255.255.0**

Gateway Shows the gateway of the USB-C Side port.

USB-C Side

- It is a fixed setting with **192.168.11.1**



Shows that you are currently accessing the controller's web panel via this connection type [USB-C].

MAC Address

Devices connected over USB-C receive the MAC address 00:00:00:00:00:00.

Important: Connecting Several MADRIX STELLA 8 Units Via USB

When connecting only via USB, the fixed IP addresses have the following implication:

If you are connecting several units via USB-C, a maximum of 2 units can be connected to the same accessing computer/mobile device and you must use 1x USB-C Front for unit 1 and 1x USB-C Side for unit 2.

If connecting more than 2 units, your accessing device will report IP address conflicts and the units' web panels cannot be properly accessed.

Fixing Routing Conflicts

Example

Default Settings

Ethernet Settings You want to change to IP address 192.168.11.12 for example.

10.85.192.0 /
255.0.0.0 /
192.168.11.1

USB-C Front

192.168.10.11
/
255.255.255.0
/
192.168.10.1

USB-C Side

192.168.11.11
/
255.255.255.0
/
192.168.11.1

Example

Changing the Subnet Mask helps, but creates a new routing conflict:

Overlapping Networks

Ethernet Settings	Ethernet Settings
192.168.11.12 / 255.255.255.0 / 192.168.11.1	
192.168.11.12	
/ 255.0.0.0 /	USB-C Front
192.168.11.1	
	192.168.10.11 / 255.255.255.0 / 192.168.10.1
USB-C Front	
	USB-C Side
192.168.10.11	
/	192.168.11.11 / 255.255.255.0 / 192.168.11.1
255.255.255.0	
/	
192.168.10.1	
USB-C Side	
192.168.11.11	
/	
255.255.255.0	
/	
192.168.11.1	

There is a routing conflict! The Subnet Masks of Ethernet and USB-C Front create overlapping network areas.

There is a routing

conflict! The Subnet Masks of Ethernet and USB-C Side create overlapping network areas.

Example Changing the network fixes the second routing conflict:
Same
Network

Ethernet Settings	Ethernet Settings
192.168.12.12 / 255.255.255.0	192.168.11.1
192.168.11.12 / 255.255.255.0	USB-C Front
192.168.11.1 / 255.255.255.0	192.168.10.11 / 255.255.255.0 / 192.168.10.1
USB-C Front	USB-C Side
192.168.10.11 / 255.255.255.0	192.168.11.11 / 255.255.255.0 / 192.168.11.1
192.168.10.1 / 255.255.255.0	
USB-C Side	
192.168.11.11 / 255.255.255.0	
192.168.11.1 / 255.255.255.0	

There is a routing

conflict!
Ethernet and
USB-C Side
cannot be on
the same
network.

Web Panel Access Control

You can set a Password to restrict access to the web panel of this controller and therefore prevent any changes to its configuration.

Enable Allows you to enable or disable the access control.
Access Once enabled, the following options become available:
Control

Make sure to remember the chosen Username and Password!

Username Enter a profile name [with a maximum of 31 characters plus null].


Password Enter a password [with a maximum of 31 characters plus null].
The UTF-8 character set is supported. Special characters might reduce the total possible character count.

Verify Enter your chosen password a second time for verification.
Password Please enter it the exact same way you entered it the first time!

Confirm any changes with **Apply**


When successful, you will be asked for your login:

- Enter your chosen **Username**
- Enter your chosen **Password**
You can show the entered password via the eye symbol.
- Confirm with **Log In**

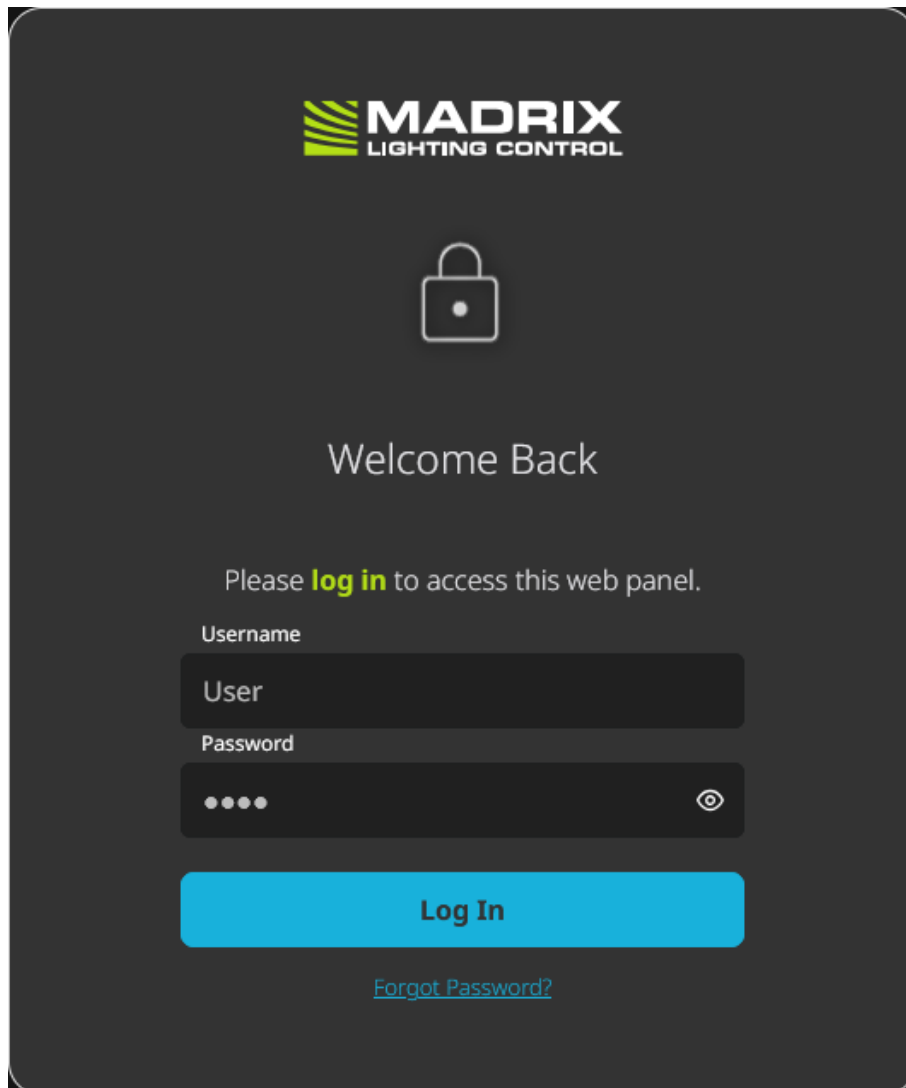

The image shows a login interface for MADRIX LIGHTING CONTROL. At the top is the logo, which consists of a green stylized 'M' followed by the text 'MADRIX' in bold and 'LIGHTING CONTROL' below it. Below the logo is a white padlock icon. The text 'Welcome Back' is centered. Below that, a message says 'Please log in to access this web panel.' with 'log in' in green. There are two input fields: 'Username' with the text 'User' and 'Password' with four dots. To the right of the password field is an eye icon. Below the fields is a large blue button labeled 'Log In'. At the bottom is a link that says 'Forgot Password?'.

When logged in, the menu will show it accordingly:

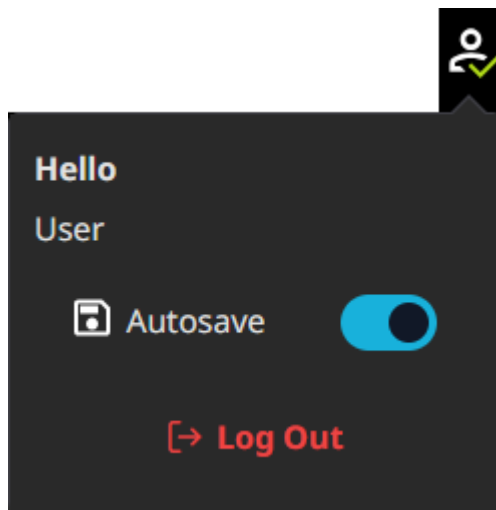**Log Out**


Locks access to the web panel again by logging you out.

- You are then forced to log into the web panel again with the set Username and Password before you can access the device and its web panel again.
- **Important: You will automatically be logged out after 30 minutes of inactivity!**

Forgot Password?

In case you cannot remember the chosen Username and Password, access to the device can only be restored by performing a Reset To Factory Default Settings. This must be done in person and thus requires personal access to the controller itself.

Follow the steps as described:

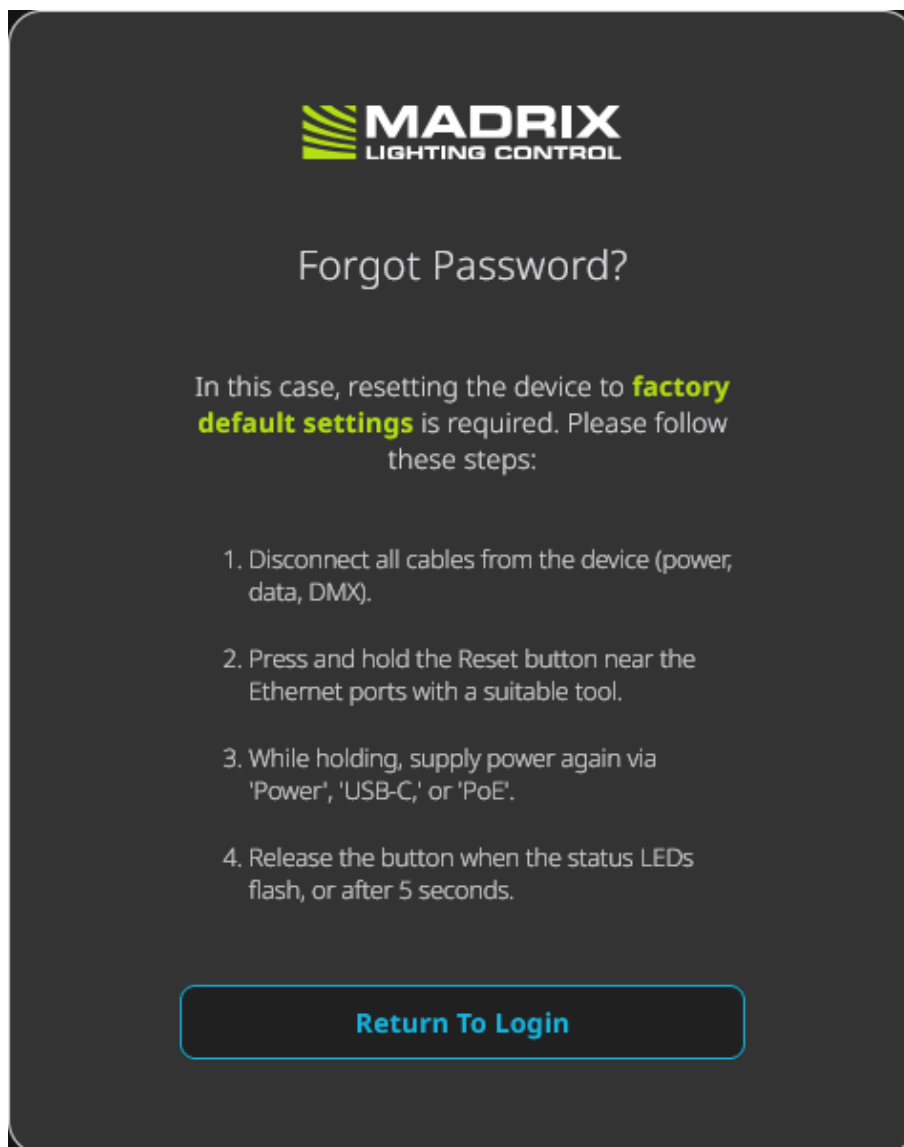

syslog

In addition to its own Log under menu »[Log](#), MADRIX STELLA 8 can send its logged system information and warnings to an external [syslog] server.

- Port 514 UDP

Enable syslog Allows you to enable or disable the syslog functionality. The following information is included:

- Warning levels include **INFO**, **WARNING**, **ERROR**
- **Serial Number**
- The unit's **Uptime**
- **Message** [UTF-8/TR36] [max. size 480 bytes]
- Category **BL** [Bootloader] or **FW** [Firmware]

- Once at each start: Software/Bootloader/Firmware Version
- Once at each start: CPU ID
- Once at each start: Manufacturer: Madrix
- Once at each start: Model/Type: Stella8

By default, this setting is disabled.

IP Address Is only available if syslog is enabled. Allows you to enter the IP address of the server, i.e. the target to which syslog entries are sent.

- Make sure to enter the correct IP address!

Test syslog Sends a test message to the specified IP address.

Confirm any changes with **Apply**

Tools

Includes additional settings for specific network configuration.

Send Automatic IGMP Queries Sends queries of the Internet Group Management Protocol to hosts in order to renew the membership in the multicast group, with regards to the controller being an sACN sender.

- Valid settings range from 0 to 600 [in intervals of 30].
- The default setting is **Off**.

Send Automatic IGMP Reports Sends reports of the Internet Group Management Protocol in order to maintain the membership in the multicast group, with regards to the controller being an sACN receiver.

- Enter the time interval [in seconds].
- Valid settings range from 0 to 600 [in intervals of 30].
- The default setting is **On** and **60 Seconds**.

Send Automatic ARP Requests Sends an Gratuitous ARP to make sure that the Ethernet connection is kept alive.
The operation code is 2 and target address is a normal MAC broadcast.
An ARP Announcement packet is also sent immediately in case the network connection has been established successfully.

- Enter the time interval [in seconds].
- Valid settings range from 0 to 600 [in intervals of 30].
- The default setting is **On** and **30 Seconds**.


Confirm any changes with **Apply**

2.2.9 Ports

This topic includes:

- [Overview](#)
- [Ports](#)

Overview

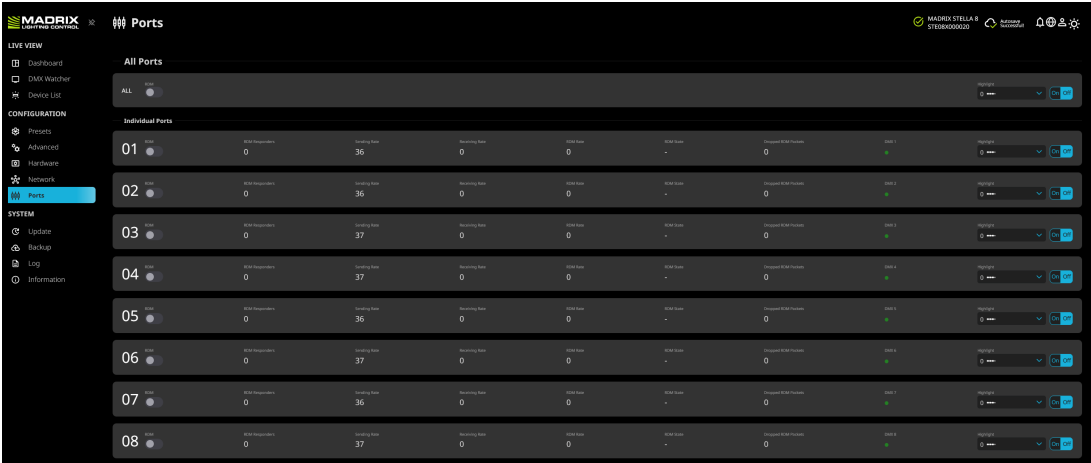

Ports

Overview

This feature refers to the physical ports **DMX 1 – DMX 8** of the controller.

All Ports

RDM Allows you to enable or disable the RDM Controller functionality for all ports at once. Learn more below.

Highlight Allows you to set the highlighting pattern for all ports at once, and enable or disable it accordingly. Learn more below.

Individual Ports

01 – 08 An index number of the ports is provided for easier referencing.

RDM Allows the device to receive and send Remote Device Management data on the specific port [to act as an RDM Controller].
This means that MADRIX STELLA 8 transmits commands and requests to RDM Responders and back; i.e. connected RDM devices receive instructions.

- **Disable RDM on the specific port, when using STELLA 8 for DMX-IN on this port [to receive DMX data]!**
- **Only enable RDM if you wish to use it. Otherwise, disable RDM to avoid any potential issues.**

See also » [Using RDM And MADRIX RADAR](#)

RDM Responders Shows the number of uniquely identified RDM devices discovered and connected to the controller.

- This value may change continuously during an active RDM discovery process.

Sending Rate Shows the current frequency with which the controller is putting data out in FPS [Frames Per Second].

- This value may change continuously during operation.

Receiving Rate Shows the current frequency with which the controller is receiving data in FPS [Frames Per Second].

- This value may change continuously during operation.

RDM Rate Shows the current frequency with which the controller is sending or receiving RDM data in FPS [Frames Per Second].

- This value may change continuously during operation.

RDM State Shows the state of the RDM module, including **Discovery** or –.

Dropped RDM Packets Shows the number of RDM packets that needed to be discarded. Reasons for the device to not be able to process packets include:

- The device/fixture did not respond in time,
- Too many RDM requests need to be handled by a single Port in a short amount of time,
- RDM requests to the device 'For Internal Sensor Data And Device Status' were incorrect [such as a failed checksum].

DXM 1 – DMX 8 Shows the status LED of the specific port in the same way it is physically lit/behaving on the controller itself.

Highlight **On / Off** - Allows you to enable or disable channel highlighting on the specific port. [512 channels are sent per port.]

Use this workflow:

- 1] Choose one of the built-in **Patterns**
- 2] Activate **On**
- 3] To deactivate again, choose Pattern **Black**
- 4] Set to **Off**

You can choose from the following Patterns:

- **0**  **All**: Sets DMX value 255 for all 512 channels. This is the default pattern.
- **01 – 32**  **Snapshots 01 – 32**: Only available when created by you. See »[Creating Snapshots](#)
- **33**  **Black**: Sets DMX value 0 for all 512 channels.
- **34**  **First Of Three**: Sets DMX value 255 for every third channel, starting with channel 1 [i.e. Red for RGB LEDs].
- **35**  **Second Of Three**: Sets DMX value 255 for every third channel, starting with channel 2 [i.e. Green for RGB LEDs].
- **36**  **First And Second Of Three**: Sets DMX value 255 for every third channel, starting with channel 1 and 2 [i.e. Red and Green for RGB LEDs].
- **37**  **Third Of Three**: Sets DMX value 255 for every third channel, starting with channel 3 [i.e. Blue for RGB LEDs].
- **38**  **First And Third Of Three**: Sets DMX value 255 for every third channel, starting with channel 1 and 3 [i.e. Red and Blue for RGB LEDs].
- **39**  **Second And Third Of Three**: Sets DMX value 255 for every third channel, starting with channel 2 and 3 [i.e. Green and Blue for RGB LEDs].
- **40**  **First Of Four**: Sets DMX value 255 for every fourth channel, starting with channel 1 [i.e. Red for RGBW LEDs].
- **41**  **Second Of Four**: Sets DMX value 255 for every fourth channel, starting with channel 2 [i.e. Green for RGBW LEDs].
- **42**  **Third Of Four**: Sets DMX value 255 for every fourth channel, starting with channel 3 [i.e. Blue for RGBW LEDs].

- **43**  **Fourth Of Four:** Sets DMX value 255 for every fourth channel, starting with channel 4 [i.e. White for RGBW LEDs].
- **44**  **3-Channel Fill:** Sets DMX value 255 for the color channels, by switching through them: channel 1, channel 2, channels 1+2, channel 3, channels 1+3, channels 2+3 [thereby switching through the previous highlighting presets].
- **45**  **3-Channel Run:** Sets DMX value 255 for the color channels, by looping through each single one of them: channel 1, channel 2, channel 3 [i.e. first Red, second Green, third Blue, fourth Red, fifth Green, sixth Blue, and so on].
- **46**  **4-Channel Fill:** Sets DMX value 255 for the color channels, by switching through them: channel 1, channel 2, channels 1+2, channel 3, channels 1+3, channels 2+3, channels 1+2+3, channel 4, channels 1+4, channels 2+4, channels 1+2+4, channels 3+4, channels 1+3+4, channels 2+3+4, channels, 1+2+3+4, all off.
- **47**  **4-Channel Run:** Sets DMX value 255 for the color channels, by looping through each single one of them: channel 1, channel 2, channel 3, channel 4 [i.e. first Red, second Green, third Blue, fourth White, fifth Red, sixth Green, seventh Blue, eighth White, and so on].
- **48**  **Stepping Channels:** Sets DMX value 255 for every single channel, one channel at a time, consecutively.
- **49**  **3-Channel Fading Fill:** Is the **3-Channel Fill** preset, but values are faded [slowly increased and decreased] instead of hard cuts.
- **50**  **3-Channel Fading Run:** Is the **3-Channel Run** preset, but values are faded [slowly increased and decreased] instead of hard cuts.
- **51**  **4-Channel Fading Fill:** Is the **4-Channel Fill** preset, but values are faded [slowly increased and decreased] instead of hard cuts.
- **52**  **4-Channel Fading Run:** Is the **4-Channel Run** preset, but values are faded [slowly increased and decreased] instead of hard cuts.
- **53**  **Fading Channels:** Is the **Stepping Channels** preset, but values are faded [slowly increased and decreased] instead of hard cuts.
- **54**  **Ramp All:** Fades all channels at the same time from and to DMX value 255 [i.e. White for RGB LEDs].
- **55**  **Ramp Wave:** Creates a wave animation across all channels [i.e. White for RGB LEDs].
- **56**  **1 Ch. Blink, Remainder Black:** Lets the first channel blink and sets DMX value 0 for all other channels.


- **57  1 Ch. Blink, Remainder White:** Lets the first channel blink and sets DMX value 255 for all other channels.
- **58  Blink All:** Lets all channels blink.

2.2.10 Update

This topic includes:

- [Overview](#)
- [Current Version](#)
- [Online Update](#)
- [Offline Update](#)

Overview

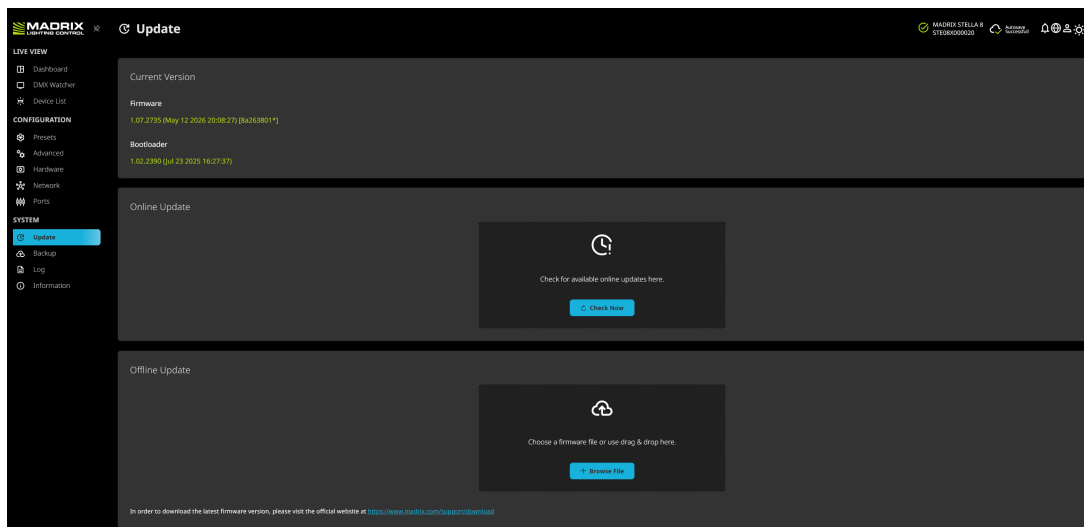

- It is highly recommended to update the firmware should a new firmware version become available.
- See released firmware versions » [Firmware Updates](#)

Current Version

Firmware Shows the currently installed firmware version.

Bootloader Shows the currently installed bootloader version.


You can manually download files from the website or have the device automatically check online for any updates.

It is recommended to always use the latest firmware for your controller!

Online Update

Automatic Check

If your web browser and computer are online, they can automatically check if an online update is available and will notify you accordingly by showing the online-update icon in both, the top menu and the left menu:

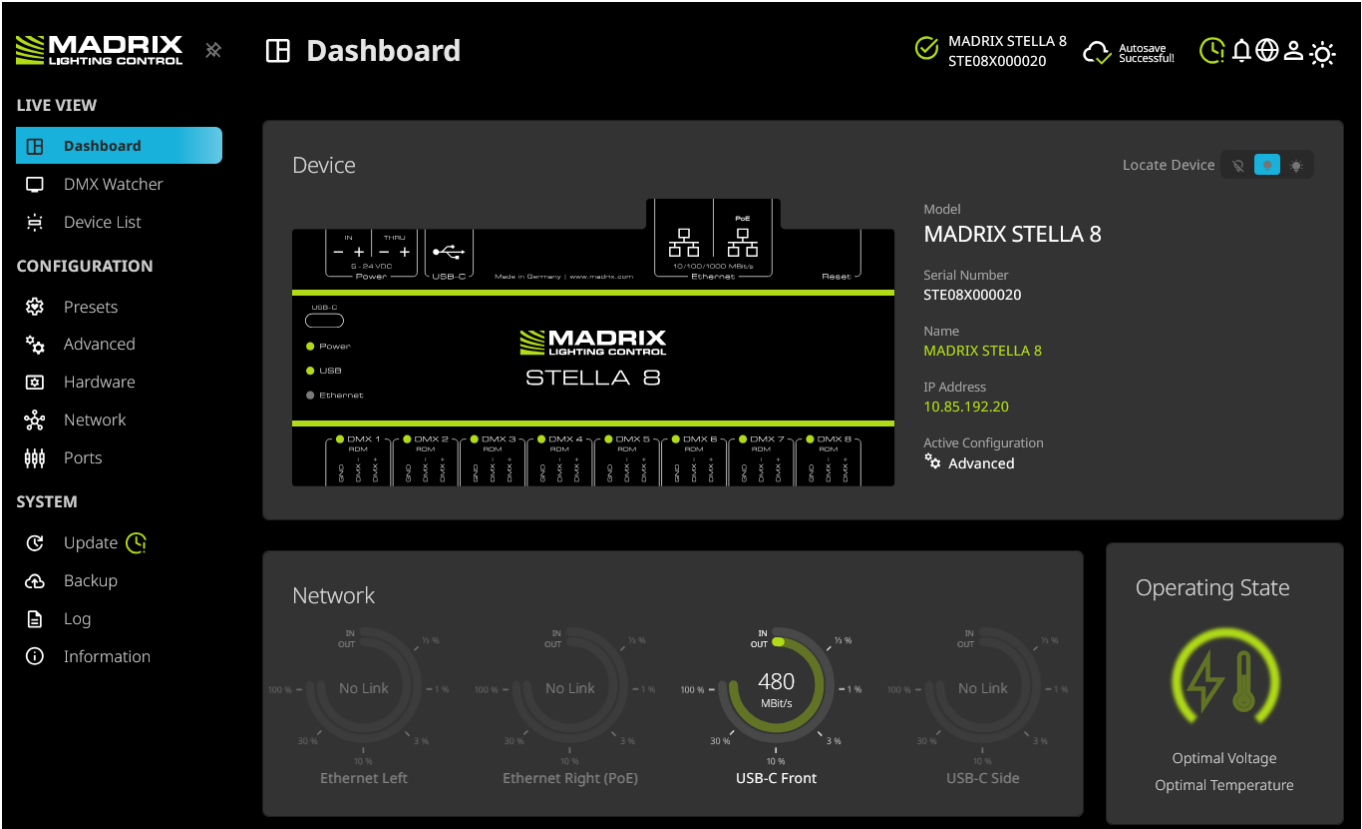

Workflow


Check Now Click to check for available online updates.

Your web browser and computer need to have an active online connection!


Please note: Only your web browser and computer have to be online in order to download the update. The STELLA 8 device itself does not need an online connection; it only needs to be connected to your web browser/computer for this to work.

- A confirmation dialog will be shown.
- **Cancel** - Aborts the process or exits the dialog if no newer update is available.
- **Confirm** - Proceeds to update the device if a newer version is available online. This button is disabled if the update has not yet been fully downloaded. A message is shown in this case and downloading takes longer than expected due to a slow


internet connection.

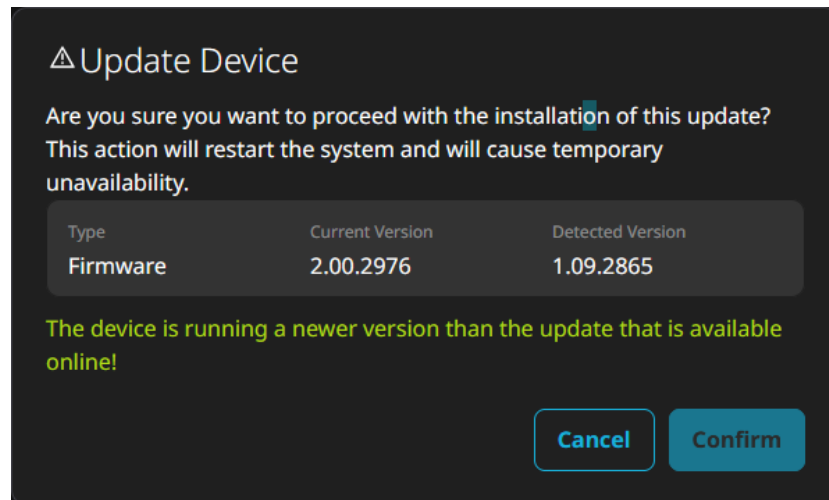

- A new window opens and shows the installation progress:
 - Firmware Updates: The status LEDs of the Ports are blinking green from right to left during the upload and installation process.
 - Bootloader Updates: The status LEDs of the Ports are blinking yellow from right to left during the upload and installation process.

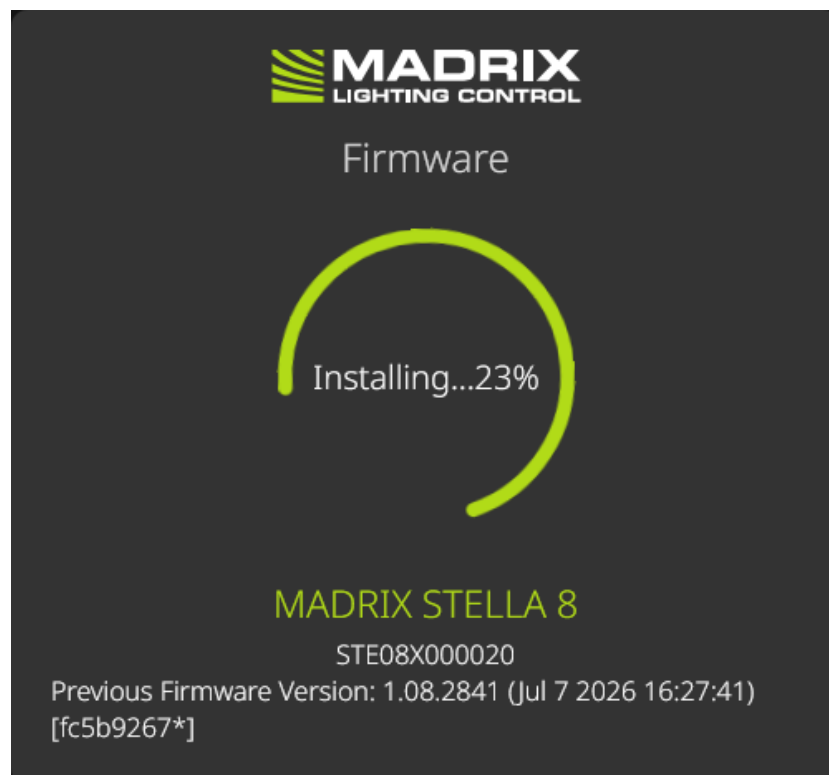

- Afterwards, the device will automatically disconnect and reconnect. A new window will open:

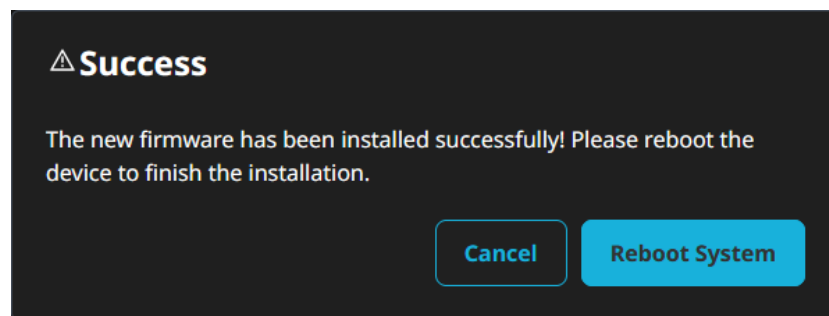

- Confirm with **Reboot System**

Offline Update

Workflow

Browse File Click to choose the firmware file to upload.


- Supported file formats are *.fwx [Firmware or Bootloader] as well as *.ebin [Firmware] and *.ubin [Bootloader].
- New firmware files can be downloaded from <https://www.madrix.com/support/download>




Alternatively, use drag and drop with your mouse to place the firmware file directly on the field.

- A confirmation dialog will be shown.
- **Make sure to upload the correct file!**
- **Create Backup** - It is recommended to have a backup of the controller's current settings before proceeding.
Click to create and download a backup file now.


- **Install Firmware** - Confirm in order to proceed.

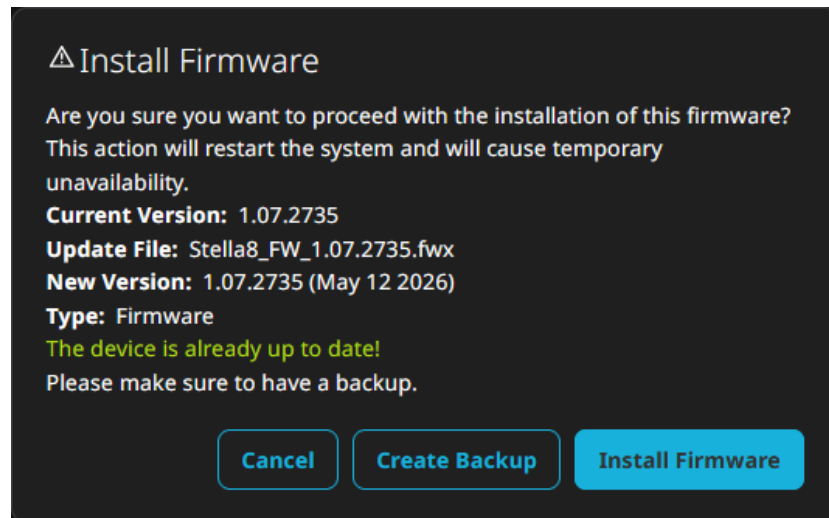

- A new window opens and shows the installation progress:
 - Firmware Updates: The status LEDs of the Ports are blinking green from right to left during the upload and installation process.
 - Bootloader Updates: The status LEDs of the Ports are blinking yellow from right to left during the upload and installation process.

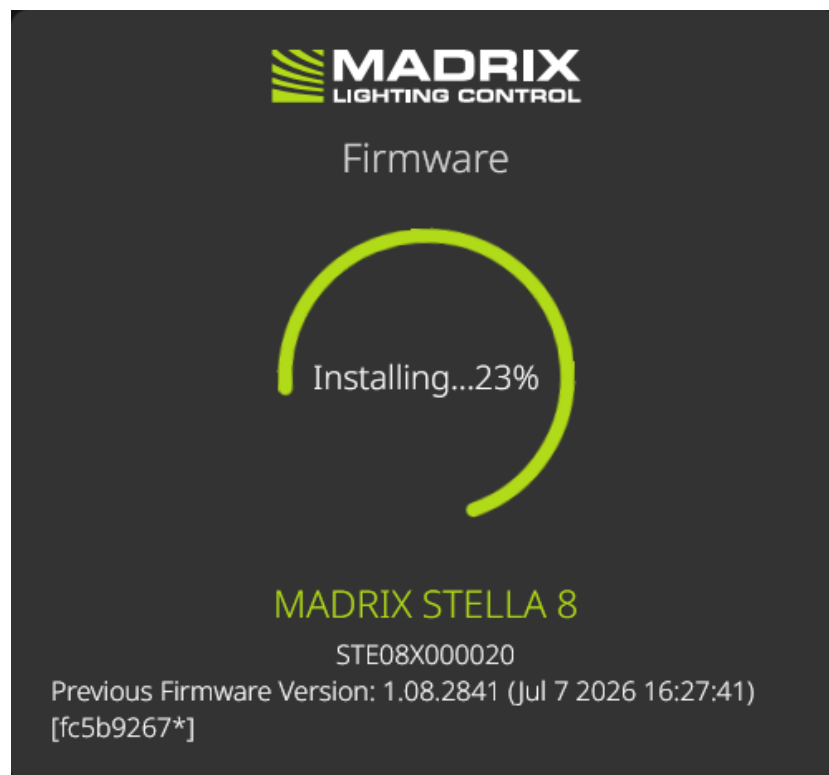

- Afterwards, the device will automatically disconnect and reconnect. A new window will open:

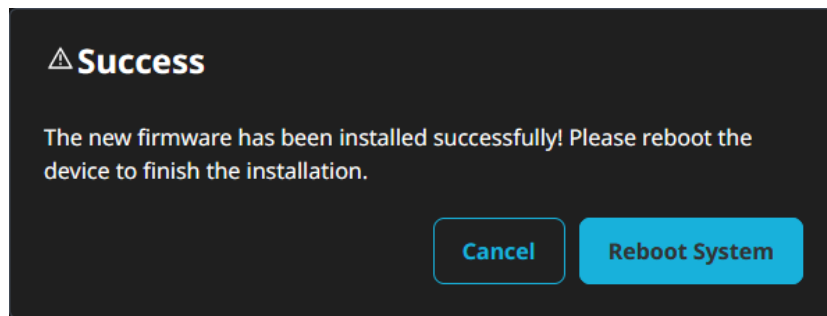


- Confirm with **Reboot System**

2.2.11 Backup

This topic includes:

- [Overview](#)
- [Create Backup](#)
- [Restore From Backup](#)

Overview

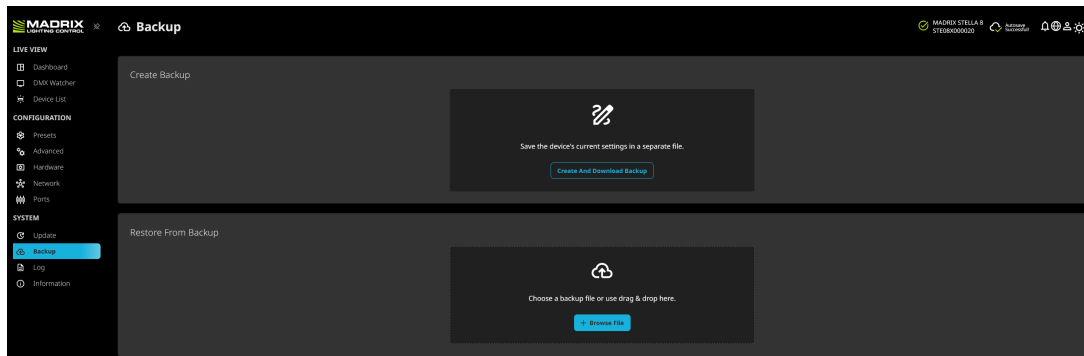


Create Backup

Allows you to save the controller's settings.

Create And Download Backup Saves the controller's current settings in a separate file [in *.json file format, named Stella8Settings.json].



The download manager of your web browser should automatically take over and manage the download, including its stored location.

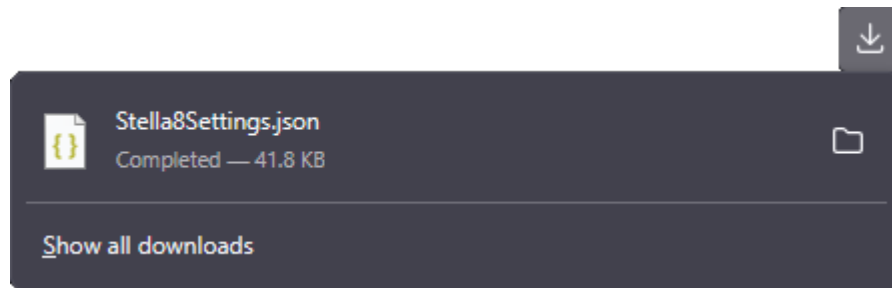

Restore From Backup

Overview

+ **Browse File** Applies the device settings stored in a previously saved backup file.

Choose the *.json file from your system via the **File Upload** dialog that is provided by your web browser afterwards.




Alternatively, use drag and drop with your mouse to place the *.json backup file directly on the field.

Note: Always create a fresh backup! You will receive a notification if the Backup was created with a different API version than your unit might currently run based on a newer firmware version. This could lead to problems due to incompatibility.

Full Restoration

I want to restore all settings.

Choose if you would like to restore all saved settings from the backup file.

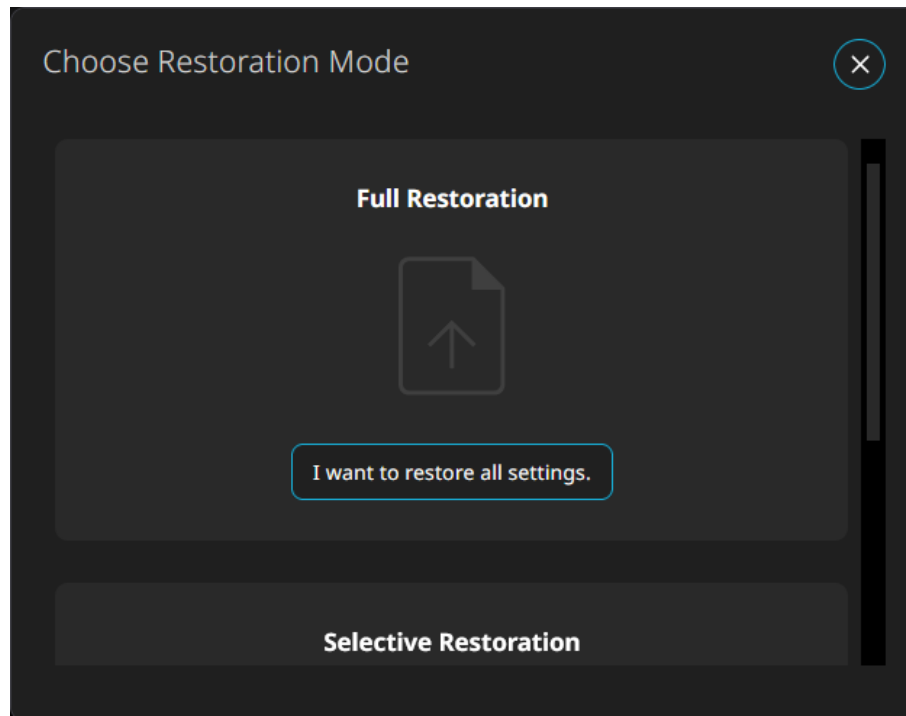


In the next step, choose if you want to ***Use the IP address from the backup*** or ***Keep the current IP address***

Confirm & Restore - Starts the restoration process, which should only take a second.

Selective Restoration


I want to restore only specific settings.

Choose if you would like to choose which settings to restore from the backup file.

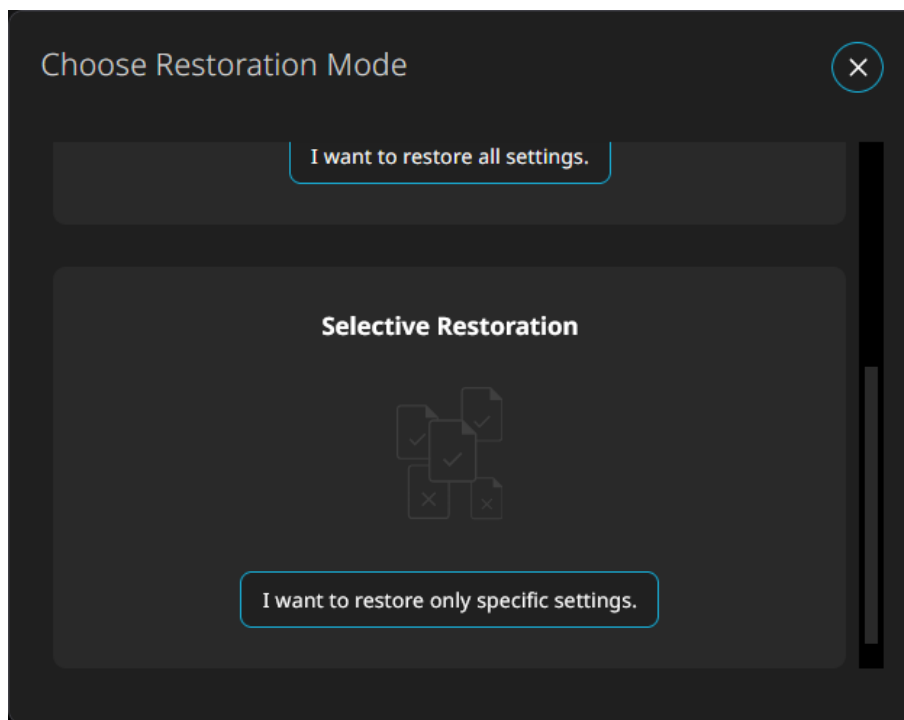

In the next step, choose which settings to restore.

- **Presets** - Restores the saved Preset. You can either choose Presets or Advanced.
See menu » [Presets](#)
- **Advanced** - Restores the saved Advanced Configuration. You can either choose Presets or Advanced.
See menu » [Advanced](#)
- **Network** - Restores the Network settings. Choose if you want to **Use the IP address from the backup** or **Keep the current IP address** in the next step.
See menu » [Network](#)
- **Ports** - Restores the Port settings.
See menu » [Ports](#)
- **Hardware** - Restores the Hardware > General Settings.
See menu » [Hardware](#)
- **RDM Responder** - Restores the Hardware > RDM For Internal Sensor Data And Device Status > ArtRdm (Act As RDM Responder) settings.
See menu » [Hardware](#)

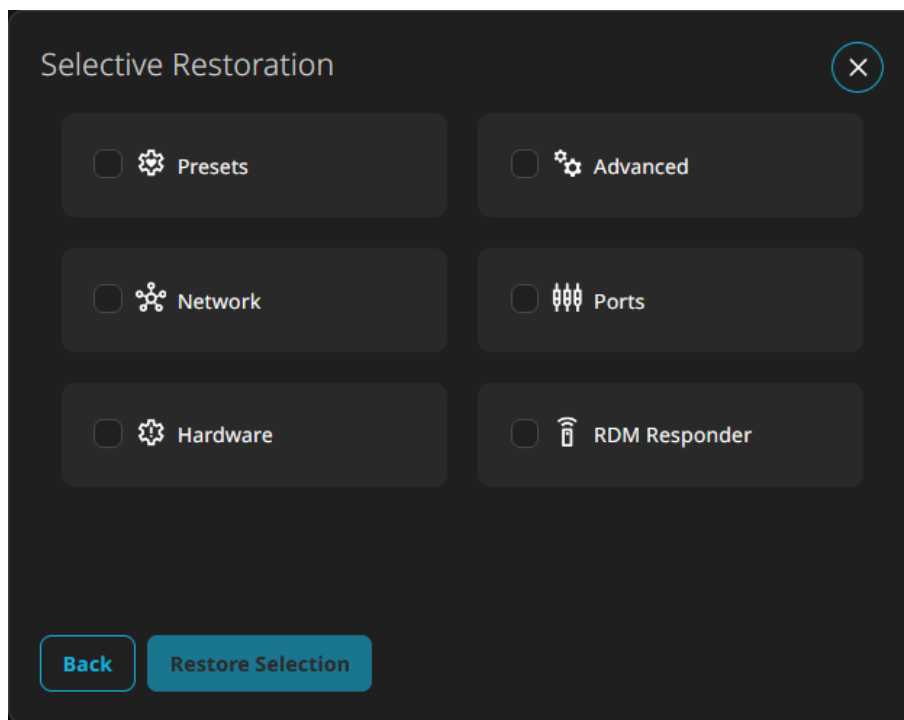

Restore Selection - Proceeds with the selected settings.


Confirm & Restore - Starts the restoration process, which should only take a second.

2.2.12 Log

This topic includes:

- [Overview](#)
- [Log](#)

Overview

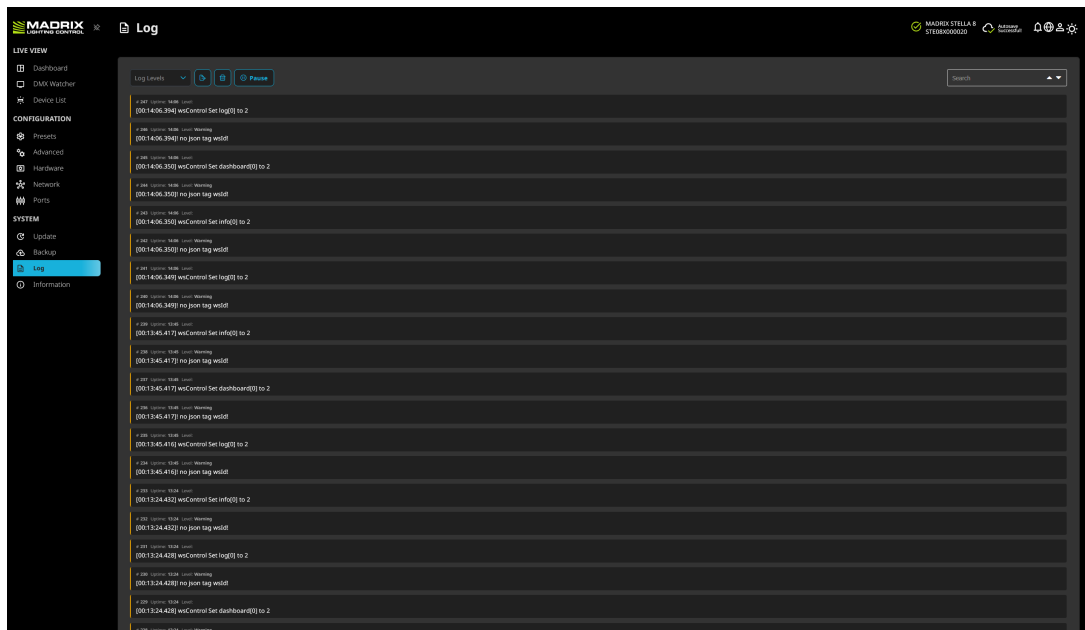

Log

The Log keeps track of all warnings and system information. New entries will be added at the top.

The Logfile might be requested by the MADRIX support team in case of support inquiries.

Log Levels

Defines which kind of information is shown and allows you to filter for:


- **All**
- **Information**
- **Warning**
- **Error**

Clear any filters via **X**




Download Logfile - Allows you to download the log as a separate file [in *.json format, named Stella8Logfile.json].


- All entries logged up to this point will be included.
- The download manager of your web browser should automatically take over and manage the download, including its stored location.

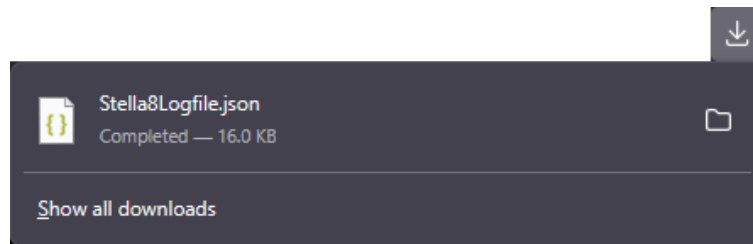

Delete All - Removes all current entries from the log.



Pause - Pauses the process of logging information in the Log.



Continue - Allows you to continue the process of logging information in the Log, once paused.

Search

- **Search** - Allows you to enter keywords or text you are looking for. The search begins right away, directly with your input.
Please note: The Log view is automatically being paused after your search. Click **Continue** again to show continued logging.
-  - Allows you to jump to the next entry found in the list.
-  - Allows you to jump to the previous entry found in the list.
-  - Clears any entered text and cancels the search.
- **Found: X/Y/Z** - Shows if search strings have been found in the log.
 - X** - Shows which item is currently selected.
 - Y** - Shows the number that is currently shown, in this paused view.
 - Z** - Shows the total number of items that have been found in the log, but will only be visible and selectable when continuing logging.




+ Show More - Shows older entries in the log, which have been hidden to reduce memory usage.

2.2.13 Information

This topic includes:

- [Overview](#)
- [Device](#)
- [Sensors](#)
- [Status](#)
- [Help](#)

Overview

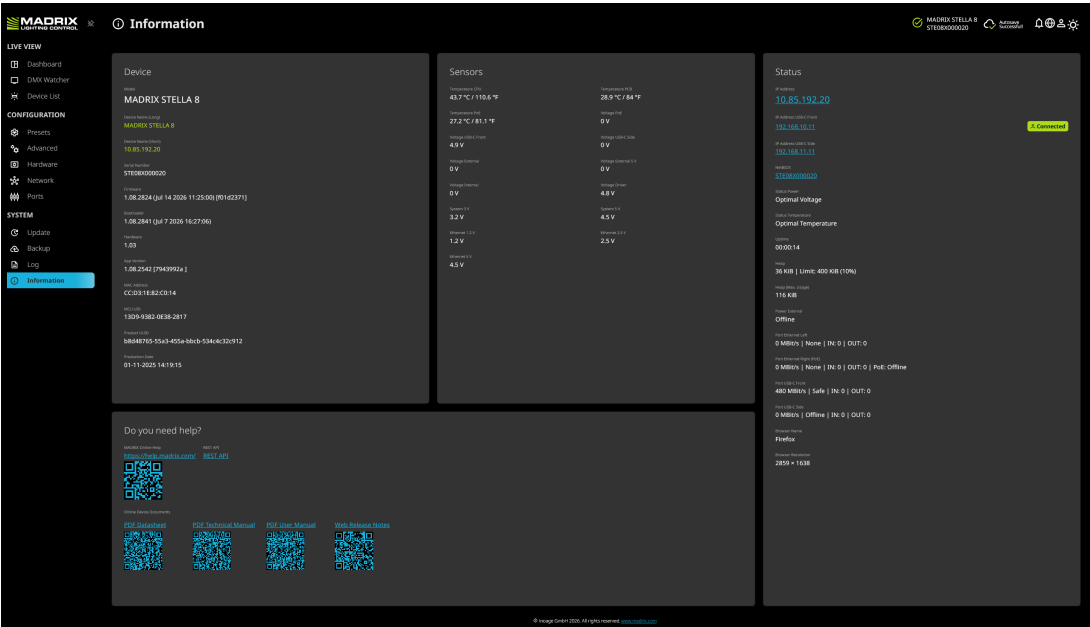

Device

Shows general information about the controller.

Model Shows the device type: MADRIX STELLA 8.

Device Name (Long) Shows the Art-Net Long Name; as set under menu » [Hardware](#)

Device Name (Short) Shows the Art-Net Short Name; as set under menu » [Hardware](#)

Serial Number Shows the unique production identifier.

Firmware Shows the current firmware version, i.e. the customized software that runs on the controller.

Bootloader Shows the current bootloader version, i.e. underlying software system that runs on the controller.

Hardware Shows the hardware revision.

App Version Shows the version number of the Web Panel.

MAC Address Shows a permanent, unique address of the controller for network communication.

MCU UID Shows a permanent, unique identifier of the controller for its hardware components.

Product UUID Shows a permanent, unique identifier for the product type for identification.

Production Date Shows the time and date when production of the unit was finalized.

Sensors

These values of internal sensors of the controller can also be provided over ArtRdm. See »[Using RDM And MADRIX RADAR](#)

Values on this page are constantly being updated for you every 3 seconds.

These values might be requested by the MADRIX support team in case of support inquiries.

Temperature CPU Shows the current temperature of the main processor [in °C and ° F].

Temperature PCB Shows the current temperature of the electrical circuit board [in °C and ° F].

Temperature PoE Shows the current temperature of components regarding Power over Ethernet [in °C and ° F].

Voltage PoE Shows the voltage currently provided by Power over Ethernet [in V].

Voltage USB-C Front Shows the voltage currently provided by USB-C Front [in V].

Voltage USB-C Side Shows the voltage currently provided by USB-C Side [in V].

Voltage External Shows the voltage currently provided when connecting through a Power port [in V].

Voltage External 5 V Shows the 5-V-voltage-marker currently provided when connecting through a Power port [in V].

Voltage Internal Shows an internal-voltage marker [in V].

Voltage Driver Shows an internal-voltage marker [in V].

System 3 V Shows the 3-V-systems-voltage marker [in V].

System 5 V Shows the 5-V-systems-voltage marker [in V].

Ethernet 1.2 V Shows the 1.2-V-Ethernet-voltage marker [in V].

Ethernet 2.5 V Shows the 2.5-V-Ethernet-voltage marker [in V].

Ethernet 5 V Shows the 5-V-Ethernet-voltage marker [in V].

Status

Shows specific information of the status of the controller, especially regarding power and communication. Values on this page are constantly being updated for you every 3 seconds.



Shows the IP address [and connection type] that is currently being used for the communication to access the web panel of the controller.

IP Address Shows the current IP address regarding Ethernet network.
Can be used as a click-able link to call the controller with this IP address in the web browser.
Is shown with a green outline if currently used to access the web panel.

IP Address Shows the fixed IP address of USB-C Front.
USB-C Front Can be used as a click-able link to call the controller with this IP address in the web browser.
Is shown with a green outline if currently used to access the web panel.

IP Address	Shows the fixed IP address of USB-C Side.
USB-C Side	Can be used as a click-able link to call the controller with this IP address in the web browser. Is shown with a green outline if currently used to access the web panel.
NetBIOS	Is an alternate way to call up the web panel or find the controller in the network, and without using the IP address. Can also be used as a click-able link to call the controller with its NetBIOS name. [Main workflow: Assuming correct network settings, simply type http://SERIALNUMBER/ into your web browser, such as http://STE08X000001/ ; often merely STE08X000001/ should work. If you want to ping the device, use only STE08X000001]
Status Power	Shows the status of the supply of power for the controller [Optimal Voltage , Voltage Too Low , Voltage Too High].
Status Temperature	Shows the status of the ambient temperature for the controller [Optimal Temperature , Temperature Too Low , Temperature Too High].
Uptime	Shows the time that has passed since the last power-cycle or restart.
Heap	Shows an internal indicator of memory load [Current Limit (Percentage)] [in KiB].
Heap (Max. Usage)	Shows the most heap that has been used so far [in KiB].
Power External	Shows the status of the power connection [Offline [Not Connected], Safe [Successfully Connected], Collapsed [Not Connected Anymore], Insufficient [Connected But Not Enough Power], Voltage Too High [Overvoltage]].
Port Ethernet Left	Shows details about the Ethernet Left port, including connection speed [in MBit/s], status [Full-Duplex , Half-Duplex , None Connection], incoming data rate [IN], and outgoing data rate [OUT].
Port Ethernet Right (PoE)	Shows details about the Ethernet Left port, including connection speed [in MBit/s], status [Full-Duplex , Half-Duplex , None Connection], incoming data rate [IN], and outgoing data rate [OUT], Voltage Too High [Overvoltage].

Port USB-C Front	Shows details about the USB-C Front port, including connection speed [in MBit/s], status [Offline [Not Connected], Safe [Successfully Connected], Collapsed [Not Connected Anymore], Insufficient [Connected But Not Enough Power], Voltage Too High [Overvoltage]], incoming data rate [IN], and outgoing data rate [OUT].
Port USB-C Side	Shows details about the USB-C Side port, including connection speed [in MBit/s], status [Offline [Not Connected], Safe [Successfully Connected], Collapsed [Not Connected Anymore], Insufficient [Connected But Not Enough Power], Voltage Too High [Overvoltage]], incoming data rate [IN], and outgoing data rate [OUT].
Browser Name	Shows which web browser is currently being used to access the web panel.
Browser Resolution	Shows with which display resolution the web panel is currently being shown in the web browser.

Help

Online User Manuals QR Code	Provides a click-able link and a scan-able image to the online help website of MADRIX for user manuals and guides: » help.madrix.com
REST API	Provides a click-able link to the offline help website of functions and commands used by the web panel to communicate with the firmware of the device.
PDF Datasheet QR Code	Provides a click-able link and a scan-able image to the PDF datasheet of the device: » https://www.madrix.com/download/mhm/documentation/STELLA8/Datasheet_MADRIX_STELLA_8.pdf
PDF Technical	Provides a click-able link and a scan-able image to the PDF technical manual of the device:

Manual	» https://www.madrix.com/download/mhm/documentation/STELLA8/Technical_Manual_MADRIX_STELLA_8.pdf
QR Code	
PDF User Manual	Provides a click-able link and a scan-able image to the PDF user manual of the device [this user manual here]:
QR Code	» https://www.madrix.com/download/mhm/documentation/STELLA8/User_Manual_MADRIX_STELLA_8.pdf
Web Release Notes	Provides a click-able link and a scan-able image to the release notes of firmware updates in this user manual Firmware Updates
QR Code	

//PART 3

*RDM And MADRIX
RADAR*

3 RDM And MADRIX RADAR

Topics Of This Chapter

- [Using RDM And MADRIX RADAR](#)

3.1 Using RDM And MADRIX RADAR

This topic includes:

- [Overview](#)
- [Settings](#)
- [MADRIX RADAR](#)

Overview

The MADRIX STELLA 8 supports RDM in two ways.

It is both, an RDM Controller and an RDM Responder.

- **RDM Controller** - MADRIX STELLA 8 transmits commands and requests to RDM Responders and back. This means that connected RDM devices receive instructions.
- **RDM Responder** - The device acts on commands and replies to requests with its own status and sensor data via ArtRdm. This means that the device itself provides sensor data and information details over RDM.

Settings

RDM Controller

Overview

RDM is fully supported over Art-Net, including ArtRdm, all other required packets, and full and continued discovery of RDM devices.

Thanks to STELLA 8's Packet Multitasking, RDM and Art-Net can be sent and received at the same time and during live operation with a min. frame rate of 22 FPS, an expected average of 34 FPS, and a max. frame rate of 44 FPS, depending on the number of RDM packets.

Settings

Make sure that the following setting is enabled in the web panel of the device:

- **Ports > RDM**

For each required port.

See menu » [Ports](#)

MADRIX RADAR Validation

MADRIX STELLA 8 unlocks all RDM devices [incl. sub-devices] connected to the STELLA 8 controller in the MADRIX RADAR Software for free!

This means they can be monitored and managed by MADRIX RADAR.

RDM Responder

Overview

That means that STELLA 8 itself can be monitored via RDM, for example in the MADRIX RADAR Software.

Settings

Make sure that the following setting is enabled in the web panel of the device:

- **Hardware > RDM For Internal Sensor Data And Device Status > ArtRdm (Act As RDM Responder)**


See menu »[Hardware](#)

MADRIX RADAR

RDM Controller

Overview

RDM devices connected to MADRIX STELLA 8 can be monitored and configured in the MADRIX RADAR Software.

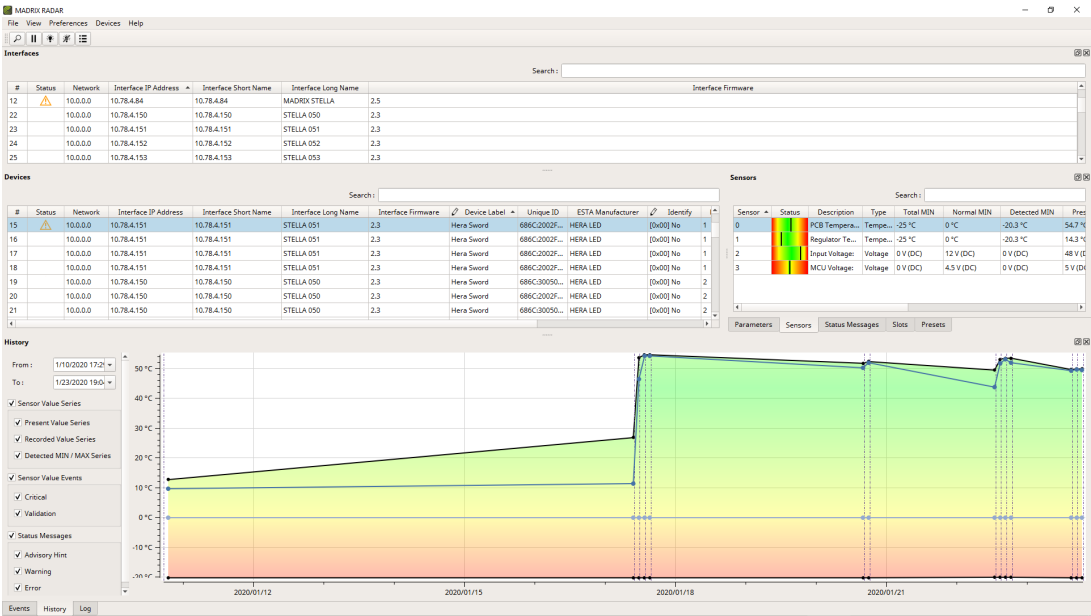

More Information

Learn more about MADRIX RADAR on the product website or user manuals. See »[Web Links](#)

RDM Responder

Overview


You can use software, like MADRIX RADAR, to use and monitor the RDM Responder functionality of MADRIX STELLA 8.

MADRIX RADAR version 1.4 is at least required.

Interfaces

You can restart the device [**Reboot System**] over RDM via RDM command **RESET_DEVICE**.

- In MADRIX RADAR, select your unit from the list of **Devices** and perform a **right-mouse click > Reset Devices (Set:ResetDevice)...**
- **0x01 - WarmStart** and **0xFF - ColdStart** will reboot the system.

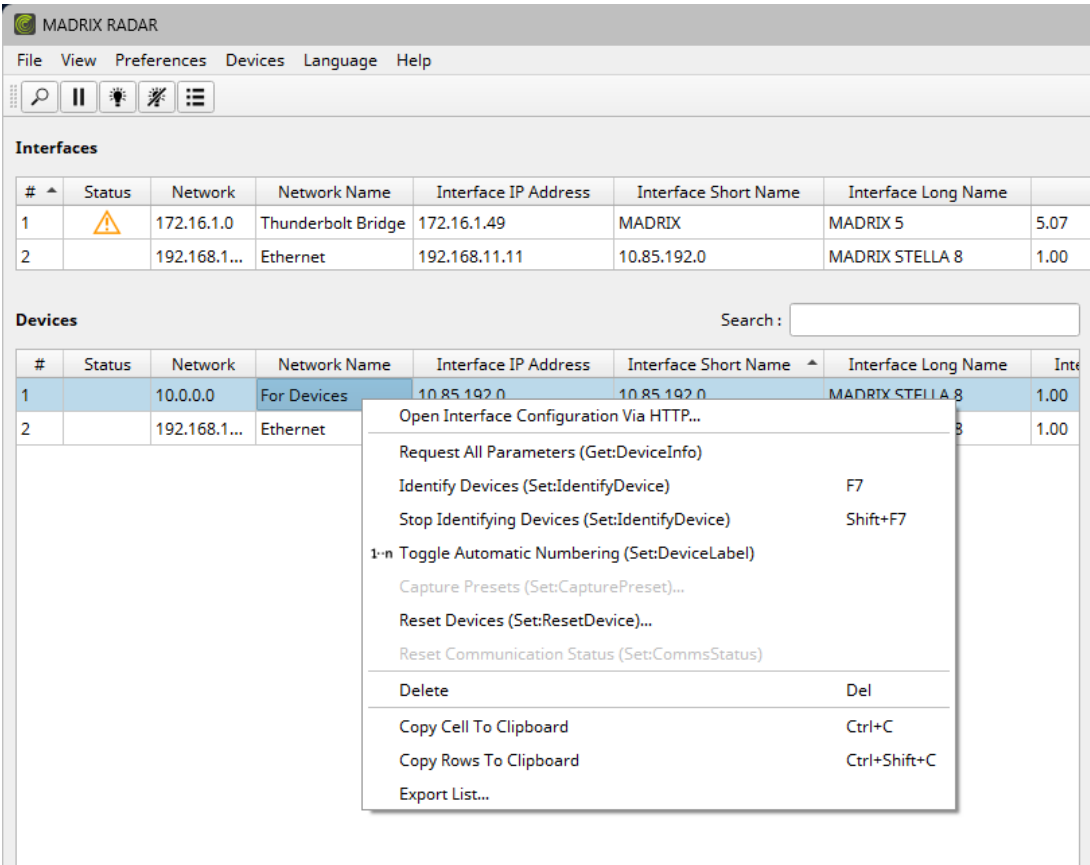

Parameters

Parameters provide general information and identification details about the controller, as shown below.

Parameters				
Search :				
#	Parameter	Value	Associated PIDs	
1	Network	10.0.0.0		
2	Network Name	For Devices		
3	Interface IP Address	10.85.192.0		
4	Interface Short Name	10.85.192.0		
5	Interface Long Name	MADRIX STELLA 8		
6	Interface Firmware	1.00		
7	Device Label	 MADRIX STELLA 8	[0x0082] DeviceLabel	
8	Device Model	[0x0103] MADRIX STELLA 8	[0x0060] DeviceInfo [0x0080] DeviceModelDescription	
9	Unique ID	4941:1E8274A6		
10	Sub-Device ID	0		
11	ESTA Manufacturer	inoage GmbH		
12	Product Category	[0x7000] Control	[0x0060] DeviceInfo	
13	Sensor Count	20	[0x0060] DeviceInfo	
14	RDM Protocol Version	1.00	[0x0060] DeviceInfo	
15	Software Version	[0x010008BE] MADRIX STELLA 8 01.00.2238	[0x0060] DeviceInfo [0x00C0] SoftwareVersionLabel	
16	Boot Software Version	[0x0100089D] MADRIX STELLA 8 BL 01.00.2205	[0x00C1] BootSoftwareVersionId [0x00C2] BootSoftwareVersionLabel	
17	Sub-Device Count	0	[0x0060] DeviceInfo	
18	Identify	 [0x00] No	[0x1000] IdentifyDevice	
19	DMX Universe	511		
20	DMX Start Address	 N/A	[0x00F0] DmxStartAddress	
21	DMX Personality	 [0x01] default	[0x00E0] DmxPersonality [0x00E1] DmxPersonalityDescription	
22	Power State	 Normal	[0x1010] PowerState	

- **Power State** - Get:PowerState reports **Normal** or **Standby** [in case Power Management is active and the DMX ports are disabled].

Sensors

MADRIX STELLA 8 provides sensor data about itself.

Sensors

Search :

Sensor	Status	Description	Type	Total MIN	Normal MIN	Detected MIN	Present Value	Detected MAX	Normal MAX	Total MAX	Recorded Value	Recording Support
0		Temperature CPU	Temperature	-20 °C	-10 °C	0 °C	46.9 °C	0 °C	75 °C	90 °C	0 °C	[0x00] None
1		Temperature PCB	Temperature	-20 °C	-10 °C	0 °C	31.7 °C	0 °C	75 °C	85 °C	0 °C	[0x00] None
2		Temperature POE	Temperature	-20 °C	-10 °C	0 °C	29.1 °C	0 °C	75 °C	85 °C	0 °C	[0x00] None
3		System Voltage 3V	Voltage	0 V (DC)	2.8 V (DC)	0 V (DC)	3.2 V (DC)	0 V (DC)	3.4 V (DC)	3.5 V (DC)	0 V (DC)	[0x00] None
4		System Voltage 5V	Voltage	0 V (DC)	3.7 V (DC)	0 V (DC)	4.5 V (DC)	0 V (DC)	5.5 V (DC)	6 V (DC)	0 V (DC)	[0x00] None
5		Driver Voltage 5V	Voltage	0 V (DC)	4.3 V (DC)	0 V (DC)	4.8 V (DC)	0 V (DC)	5.5 V (DC)	6 V (DC)	0 V (DC)	[0x00] None
6		Network Voltage 1.2V	Voltage	0 V (DC)	1.1 V (DC)	0 V (DC)	1.1 V (DC)	0 V (DC)	1.3 V (DC)	1.4 V (DC)	0 V (DC)	[0x00] None
7		Network Voltage 2.5V	Voltage	0 V (DC)	2.3 V (DC)	0 V (DC)	2.4 V (DC)	0 V (DC)	2.7 V (DC)	2.9 V (DC)	0 V (DC)	[0x00] None
8		Network Voltage 5V	Voltage	0 V (DC)	3.7 V (DC)	0 V (DC)	4.5 V (DC)	0 V (DC)	5.5 V (DC)	6 V (DC)	0 V (DC)	[0x00] None
9		Input Voltage	Voltage	0 V (DC)	0 V (DC)	0 V (DC)	0 V (DC)	0 V (DC)	24 V (DC)	36 V (DC)	0 V (DC)	[0x00] None
10		Extern Input Voltage	Voltage	0 V (DC)	0 V (DC)	0 V (DC)	0 V (DC)	0 V (DC)	24 V (DC)	36 V (DC)	0 V (DC)	[0x00] None
11		PoE Voltage	Voltage	0 V (DC)	0 V (DC)	0 V (DC)	0 V (DC)	0 V (DC)	13 V (DC)	36 V (DC)	0 V (DC)	[0x00] None
12		Extern Voltage 5V	Voltage	0 V (DC)	0 V (DC)	0 V (DC)	0 V (DC)	0 V (DC)	5.5 V (DC)	6 V (DC)	0 V (DC)	[0x00] None
13		Right-VBUS Voltage 5V	Voltage	0 V (DC)	0 V (DC)	0 V (DC)	4.8 V (DC)	0 V (DC)	5.5 V (DC)	6 V (DC)	0 V (DC)	[0x00] None
14		USB CC1 Pin (Right)	Voltage	0 V (DC)	0 V (DC)	0 V (DC)	1.7 V (DC)	0 V (DC)	3 V (DC)	3.3 V (DC)	0 V (DC)	[0x00] None
15		USB CC2 Pin (Right)	Voltage	0 V (DC)	0 V (DC)	0 V (DC)	0 V (DC)	0 V (DC)	3 V (DC)	3.3 V (DC)	0 V (DC)	[0x00] None
16		Left-VBUS Voltage 5V	Voltage	0 V (DC)	0 V (DC)	0 V (DC)	0 V (DC)	0 V (DC)	5.5 V (DC)	6 V (DC)	0 V (DC)	[0x00] None
17		USB CC1 Pin (Left)	Voltage	0 V (DC)	0 V (DC)	0 V (DC)	0 V (DC)	0 V (DC)	3 V (DC)	3.3 V (DC)	0 V (DC)	[0x00] None
18		USB CC2 Pin (Left)	Voltage	0 V (DC)	0 V (DC)	0 V (DC)	0 V (DC)	0 V (DC)	3 V (DC)	3.3 V (DC)	0 V (DC)	[0x00] None
19		Heap Memory	Memory Size	0 KiB	1 KiB	0 KiB	20 KiB	0 KiB	299 KiB	300 KiB	0 KiB	[0x02] Detected MIN / MAX

Device Lost

MADRIX RADAR also monitors if the connection to a controller has been lost.

Devices

Search :

#	Status	Network	Network Name	Interface IP Address	Interface Short Name	Interface Long Name	Interface Firmware	Device Label
2		10.0.0.0	For Devices	10.85.192.0	10.85.192.0	MADRIX STELLA8	1.00	

More Information

Learn more about MADRIX RADAR on the product website or user manuals. See »[Web Links](#)

//PART 4

Technical Support

4 Technical Support

Topics Of This Chapter

- [Firmware Updates](#)

4.1 Firmware Updates

This topic includes:

- [Overview](#)
- [How To Update](#)
- [Available Firmware Updates](#)

Overview

It is highly recommended to update the firmware should a new firmware version become available!

How To Update

- **A]** To update your devices, please use the separate MADRIX HARDWARE MANAGER Software.
Learn more » [MADRIX HARDWARE MANAGER \[USB / Ethernet\]](#)
- **B]** Alternatively, you can upload the new firmware on the web panel of MADRIX STELLA 8 itself.
Learn more under menu » [Update](#)

Available Firmware Updates

Sorted in descending order.

Latest Version	Highlights
STELLA 8 Firmware 2.00.2976 STELLA 8 Bootloader 2.00.2976 Release Date September 2026	Due to an update of the Windows operating system (KB5124008), the connection over USB might not work with your computer anymore. If this is the case, please perform this update by connecting over Ethernet network! (This update will also fix this exact issue.) ▪ The Online Update now disables the Confirm button to proceed as long as the update is not yet fully downloaded (#13451). ▪ The Online Update now shows a message when downloading takes longer than expected due to a slow internet connection (#13526). ▪ The Online Update now shows the current and detected bootloader version if the update also includes a new bootloader (#13501). ▪ The Offline Update now checks for the correct device type to prevent incompatible updates (#13492). ▪ The Web Panel now fully supports using keyboard shortcut Tab to move the current selection to the next control, that is tabbing through all available controls on the website (#13272). ▪ Improved compatibility with systems reporting back a large number of RDM devices at the same time (#13429). ▪ Now hides the field IP Address since it is not needed when set To Broadcast/Multicast under Advanced > Destination > Advanced Settings (#13360). ▪ Now hides the field IP Address since it is not needed when set To Broadcast/Multicast under Advanced > Destination > Add New Destinations/Edit Selection (#13362). ▪ Optimized the layout under Web Panel > Dashboard, especially for the mobile view, when a very long Device Name was set (#13328). ▪ Updated the App Version of the Web Panel to 2.00 (#13127). ▪ Updated and optimized system resources (#12441, #13074, #13300, #13443, #13488). ▪ Streamlined internal USB routing (#13156). ▪ Streamlined internal API routing (#13510). ▪ Fixed an important issue that fixed incompatibility of the Network-over-USB connection (virtual link) that broke with the Windows operating system's update KB5124008 (#13530). ▪ Fixed an issue that could cause the Web Panel to not react anymore when switching to menu Ports multiple times (#11611). ▪ Fixed an issue that could cause the Web Panel and the device to not react anymore (#11611). ▪ Fixed an issue with memory allocation in the web browser that could result in excessive memory usage and tab crashes eventually when switching between certain menus of the Web Panel or continuously having the Web Panel open for days (#12118). ▪ Fixed a CSS error regarding the declaration of height under Web Panel > Advanced (#12524). ▪ Restored incorrect color values for labels and controls under Web Panel > Advanced (#13220). ▪ Fixed a layout issue when showing a very long Device Name on the Web Panel in the mobile view in low resolutions (#13368).

	- Fixed a layout issue of the Autosave button in the top menu for certain languages (#13369). - Fixed a layout issue when showing the message for successfully autosaving in the top menu in the Russian language (#13388). - Fixed that the gauges did not show the used data bandwidth anymore (#13393). - Fixed that the Success message box was not playing back its animation and did not automatically disappear anymore (#13434). - Fixed various errors that were only visible in the developer console of web browsers (#13436, #13458, #13529). - Fixed an issue that allowed values other than 0, 30, 60, 90, 120, ..., 600 to be set when using the spin buttons after manually entering a value under Network > Tools > Send Automatic IGMP Reports/Send Automatic ARP Requests (#13438). - Fixed the alignment of controls under Web Panel > Network > Tools for languages other than English (#13439). - Fixed missing translations under Web Panel > Network for Bahasa Indonesia (#13444). - Fixed an issue that did not correctly turn off all Status LEDs when setting ArtAddress > AcLedMute in order to mute status indicators (#13495). - Fixed that the Art-Net ArtPollreply was too big by 1 byte (#13511). - Fixed an issue with the Online Update that did not check correctly for the build number (#13532).
STELLA 8 Bootloader 2.00.2976 Release Date September 2026	Fixed an important issue that fixed incompatibility of the Network-over-USB connection (virtual link) that broke with the Windows operating system's update KB5124008 (#13530).
STELLA 8 Firmware 1.09.2865 STELLA 8 Bootloader 1.09.2865 Release Date July 2026	Please update devices by using MADRIX HARDWARE MANAGER Software (in version 1.2.0.150 at least) over Ethernet network! [Bootloader 1.09.2865 is required for this update, and the update over USB is likely to fail.] - Web Panel > Information > Device: Now shows the Production Date (#13309, #13334, #13341). - Web Panel > Log: Now only displays 100 entries at once to reduce memory usage. The new + Show More button reveals older list entries as needed (#12319). - Now sends the ArtCommand reply to set-stage only when precisely having reached said stage (#13349). - Updated the App Version of the Web Panel to 1.09 (#13343). - REST API: Added productionDate to api/info (#13308). - Fixed that Highlighting under Web Panel > Advanced incorrectly did deselect the currently selected Preset, although it is only a temporary setting and did not justify that an Advanced configuration was created (#13239, #13342). - Fixed an issue with the size of the Discard button in the Top Menu when viewing the Web Panel in the mobile view and using the French language (#13323). - Fixed an issue with the size of the Universe input field under Web Panel > Advanced > State (#13357).

	▪ Fixed an issue with incorrect spacing of the view-options menu under Web Panel > Advanced (#13363). ▪ Fixed an issue that incorrectly showed label Firmware when using the Offline Update to update the bootloader (#13365).
STELLA 8 Bootloader 1.09.2865 Release Date July 2026	▪ Now reports its version number from the correct device memory (#13313, #13314).
STELLA 8 Firmware 1.08.2841 STELLA 8 Bootloader 1.08.2841	▪ Web Panel: Now automatically checks if a new update is available online for the device and notifies the user via an icon both in the top menu and the left menu [online connection required for the web browser/computer] (#13153, #13213). ▪ Web Panel > Advanced: Now immediately expands the tile when clicking on Modifiers (#12905). ▪ Web Panel > Advanced > Add New Sources/Edit Selection: The list of possible Destinations is now much more manageable when showing up to the maximum of 32 Destinations (#13109). ▪ Web Panel > DMX Watcher: Added a Refresh Rate option for 20 Hz (#13238). ▪ Web Panel > Hardware > Special Commands: Now shows an information screen when resetting to factory defaults for a sufficient time (#12880). ▪ Web Panel > Hardware > Special Commands: Now correctly redirects to the default IP address not only over Ethernet but also over USB-C when resetting to factory defaults (#13212). ▪ Now supports updating the Bootloader via the Online Update and automatically checks for compatibility, requirements, and restrictions (#12999). ▪ Now supports updating the Bootloader via the Offline Update and automatically checks for compatibility, requirements, and restrictions (#13160, #13166). ▪ Now automatically performs a Reset To Factory Default Settings if the firmware/bootloader update requires it, and added a message to notify the user (#12998). ▪ Now shows if the Bootloader or the Firmware are currently being updated or if the device is being reset (#13197). ▪ Changing the Highlighting Pattern of Ports is now stored persistently (#13242). ▪ Improved the Log to always show the controls; especially when using the search bar (#13084). ▪ Optimized the sizes of controls; especially for Web Panel > Advanced (#12831, #12295). ▪ Added translations for all new features for supported languages (#13102, #13164). ▪ Updated the App Version of the Web Panel to 1.08 (#13143). ▪ Removed unnecessary resource files (#12549). ▪ REST API: api/* now provides more information about Snapshots, without delivering all the detailed and potentially high data volume of api/snapshot (#12833). ▪ REST API: Added gatewayDefaultUsbLeft and gatewayDefaultUsbRight to api/config (#13221).

	▪ Fixed an important issue that did not allow the connection of the Web Panel to devices running iOS or iPadOS over USB-C (#12684, #12728, #13251). ▪ Fixed that Highlighting did not override the output when used under Web Panel > Ports, and improved how it works in combination with Highlighting under Web Panel > Advanced (#11976). ▪ Fixed an issue that did not update all parts of the Web Panel when selecting a different language (#12292). ▪ Fixed an issue that did not allow to perform a firmware update when using certain web browsers and browser version and the connection over Ethernet (#12564). ▪ Fixed an issue that Universe and Modifier Edits under Web Panel > Advanced were influenced by each other and changed again when editing those values across multiple tiles (#12821). ▪ Fixed an issue that did not show the tiles under Web Panel > Advanced when viewing in the mobile view (#12826). ▪ Fixed an issue that did not apply the Refresh Rate selected in the Settings under Web Panel > DMX Watcher (#12939). ▪ Fixed various warnings and errors reported by the integrated development environment (#13110). ▪ Fixed incorrect sizes of the Port edit fields under Web Panel > Advanced > Add New Sources/Add New Destinations (#13111). ▪ Fixed incorrect label positions under Web Panel > Advanced > Add New Sources/Add New Destinations (#13115, #13269). ▪ Fixed an issue with inconsistent visual highlighting of results when using the search bar under Web Panel > Log (#13119). ▪ Fixed a potential issue that could prevent writing and reading settings to/from the device's memory (#13201). ▪ Fixed missing translations for the German language (#13214). ▪ Fixed an invisible icon in the top menu when using Light Theme (#13215). ▪ Fixed that netmaskDefaultUsbLeft and netmaskDefaultUsbRight did not work correctly for the REST API (#13221). ▪ Fixed that the Color Order label Original under Web Panel > Advanced > Modifiers was not translated when switching to a language other than English (#13225). ▪ Fixed that values were only updated after 10 s when using a Refresh Rate of 0.1 Hz under Web Panel > DMX Watcher (#13237). ▪ Fixed an issue that the Apply Settings button could not be clicked under Web Panel > Advanced > Destinations after changing the Source Protocol via Edit Selection (#13244). ▪ Fixed invisible spin controls when using Light Theme (#13284).
STELLA 8 Bootloader 1.08.2841	▪ The Bootloader now registers if connections to the device have changed after loading the Bootloader, especially regarding USB-C (#12660, #13081). ▪ Fixed an important issue that did not allow the connection of the Web Panel to devices running iOS or iPadOS over USB-C (#12684, #12728, #13251).
STELLA 8 Firmware 1.07.2735 STELLA 8 Bootloader 1.02.2390	Please update devices to firmware version 1.03.2451 first, by using MADRIX HARDWARE MANAGER Software (in version 1.1.0.150 at least)! ▪ Improved the background check for an online connection for the Online Update (#13053).

Release Date May 2026	▪ Now shows the complete firmware number for Current Version in the Update Device and Install Firmware dialogs for the Online Update and the Offline Update (#13138). ▪ Streamlined internal usage of the maxDmxCount variable [Maximum DMX Port Count] (#13114). ▪ Updated the App Version of the Web Panel to 1.07 (#13072). ▪ Fixed that the showed data is up to date when saving a Snapshot under the same slot and name anew after manually editing its channels (#13047). ▪ Fixed an issue that still showed the Detected Version during an Online Update even if the online connection had been disconnected during the process (#13141). ▪ Fixed an issue that caused the Online Update not to work (#13142).
STELLA 8 Firmware 1.06.2732 STELLA 8 Bootloader 1.02.2390	▪ Web Panel > Update > Offline Update: Now also supports the *.fwx file type in addition to the *.ebin and *.ubin file types (#12972, #13077, #13098). ▪ Web Panel > Update: The update process now shows if an update file is of the type Firmware or type Bootloader (#13010). ▪ Web Panel > Information: Added the Product UUID for clear product identification (#13095). ▪ Web Panel > Log: Now shows found item counts after a search as currently selected/number currently shown in this paused view/total number of items found (#13064). ▪ Improved the Light Theme of the Web Panel (#12647, #13002, #13020, #13025, #13056, #13057, #13061, #13062, #13065, #13067, #13075, #13076, #13080, #13085, #13086). ▪ Added translations for all new features for supported languages (#12445). ▪ Updated the App Version of the Web Panel to 1.06 (#13070). ▪ Fixed that the Settings USB-C Front and Settings USB-C Side under Web Panel > Network still appeared to be editable although they cannot be changed (#11759). ▪ Fixed an issue that could show the web browser's login screen instead of the login screen of the Web Panel when enabling Access Control under Web Panel > Network > Web Panel Acces Control (#13022). ▪ Fixed an issue that initially did not show all available devices under Web Panel > Device List (#13038). ▪ Fixed an issue that would make the Web Panel's login dialog flicker when accessing it on a mobile device after enabling Access Control (#13041). ▪ Fixed that not enough space was provided for Device Name (Long) under Web Panel > Information > Device when using all available 63 characters (#13045). ▪ Fixed visual issues regarding radio buttons and scrollbars in the Top Menu (#13055). ▪ Fixed visual issues of the user interface when entering text in the Search field under Web Panel > Log (#13058). ▪ Fixed visual offsets of the buttons Apply and Reset Password under Web Panel > Network > Web Panel Access Control (#13060). ▪ Fixed an issue that did not show values for Port Ethernet Right when a connection was made only to Ethernet Left (#13071). ▪ Fixed an issue that did not translate the state of PoE under Web Panel > Information > Status > Port Ethernet Right (PoE) (#13068)

	▪ Fixed an issue that showed the 'Restoring From Backup...' dialog when rebooting the device under Web Panel > Hardware > Reboot System (#13078). ▪ Fixed an issue that did not show the 'Restoring From Backup...' dialog when loading a backup file under Web Panel > Backup > Restore From Backup (#13078). ▪ Fixed that the Idle status of the status LEDs was not shown under Web Panel > Ports > DMX 1-8 (#13086). ▪ Fixed an issue that did not show the 'Reconnecting...' dialog centered correctly after changing the IP address (#13092). ▪ Fixed an issue that immediately activated 'Limit To IP Address 0.0.0.0' when changing the protocol to Art-Net or sACN under Web Panel > Advanced > Sources (#13094). ▪ Fixed that universe numbering did still start with 0 instead of 1 under Web Panel > Advanced > Add New Sources (#13108). ▪ Fixed an issue that incorrectly allowed to add Destinations for DMX ports 9 – 12 under Web Panel > Advanced > Add New Destinations (#13112). ▪ Fixed an issue that visually did not show that a Preset was currently activated after switching to Web Panel > Advanced although no changes were made to the configuration (#13122). ▪ Fixed an issue that removed the wrong tiles in certain cases upon deletion under Web Panel > Advanced > Sources (#13124)
STELLA 8 Firmware 1.05.2722 STELLA 8 Bootloader 1.02.2390	▪ Now shows the connection state under Web Panel > Network when accessing the device via NetBIOS (#12828). ▪ Removed the Reset Password option from the menu which appeared when viewing the Web Panel in the mobile view (#13040). ▪ REST API: Added value ipConnection to api/config and api/info (#12833). ▪ REST API: Added value presetId to api/dashboard (#13029). ▪ REST API: Added value deviceNameLong to api/dashboard (#13043). ▪ REST API: Changed value preset max to presetMax in api/preset (#13029). ▪ Streamlined API calls when accessing Web Panel > Dashboard (#13023). ▪ Updated the App Version of the Web Panel to 1.05 (#13009). ▪ Fixed a critical error that could cause the device to become unresponsive when receiving network traffic that is not control data (#13007). ▪ Fixed a critical error that could prevent control data to be send to output when only supplying power over PoE (#13021). ▪ Fixed several issues regarding multi-selection in the Web Panel > Advanced > Edit Selection dialog (#11623). ▪ Fixed an issue that showed the same firmware version for Current Version and New Version when updating the device under Web Panel > Update > Install Firmware (#12777). ▪ Fixed an incorrect visual style for Expand/Collapse and Filter under Web Panel > Advanced (#13016). ▪ Fixed visual issues with the login screen when setting a username and password under Web Panel > Network (#13017). ▪ Fixed that Logout and Reset Password in the menu did work correctly when viewing the Web Panel in the mobile view, and that the options disappeared when refreshing the page (#13039). ▪ Fixed that values under Web Panel > Information and Web Panel > Log were not automatically refreshed anymore (#13050).

STELLA 8 Firmware 1.04.2691 STELLA 8 Bootloader 1.02.2390	▪ Art-Net: Universe 0x00 has been deprecated according to the Art-Net specifications. Start universe 0 used to be 0x00 and referenced as 1 on the user interface of the device. Now, Start Universe 1 and thus universe numbering on the device starts at 0x01, instead of 0x00. (#12720). ▪ Web Panel > Update: Added Online Update functionality in addition to the Offline Update (#12072, #12970). ▪ Web Panel > DMX Watcher: Allows you to edit single channels of recorded Snapshots in Pause mode. Make sure to save the Snapshot again afterwards! (#12974). ▪ Web Panel > DMX Watcher: Changed the header row from absolute numbering to offset numbering, such as +0, +1, +2, etc. to quickly grasp the corresponding DMX channel (#12258). ▪ Web Panel > Information: Now uses the same style and icon to show which network connection currently is established as Web Panel > Network (#12929). ▪ Web Panel > Information: Added links and QR codes to online device documents, including PDF Datasheet, PDF Technical Manual, PDF User Manual, and Web Release Notes, which in case of need can be accessed with a separate smartphone with online access, for example (#12134, #12957, #12969, #12991, #12992). ▪ Network packages are now being filtered to only process applicable Art-Net and sACN packets, which substantially increases the performance when recording Broadcast data and allows receiving a high number of DMX universes with high frame rates; and also ensures responsiveness of the Web Panel and data reception over Ethernet in data-intensive environments (#12521, #12522). ▪ Added an IP ACL [network firewall] in order to filter network traffic that the device does not need to process or even check for possible processing (#10817). ▪ Now supports the Preview Flag of Streaming ACN [sACN] to discard data that is intended for visualization purposes only (#12717). ▪ Improved compatibility with slower-responding fixtures over RDM (#10537). ▪ The Web Panel is now being compressed to decrease memory load as well as firmware file sizes for upload (#11941). ▪ Now directly shows the entire list of options when choosing a different language from the Web Panel's menu in desktop mode (#11875). ▪ Optimized various controls of the Web Panel to better fit the various languages and translations (#12229, #12641, #12692, #12693). ▪ Optimized the Web Panel for horizontal smartphone usage under Web Panel > Presets and Web Panel > Advanced (#12254). ▪ Changed index sites from shtml to html extension (#12488). ▪ Highlighting under Web Panel > Advanced no longer triggers the Apply Settings button and is switched off when changing to a different view or menu in the Web Panel (#12817). ▪ It is now easier to enable or disable Autosave in the menu as the clickable area has been enlarged (#12847). ▪ Now uses Device Name (Long) as the Web Panel's title in the tab of the web browser (#12863). ▪ Now also shows the currently installed Bootloader version under Web Panel > Update (#12970).
---	--

	▪ Streamlined the style of titles across the Web Panel (#12928). ▪ Renamed Online User Manuals to MADRIX Online Help under Web Panel > Information (#12987). ▪ Improved the Light Theme of the Web Panel (#12927, #12930, #12946, #13001, #13008). ▪ REST API: Added ipConnection [IP address used to connect to the web panel] to route api/config and api/info (#12833). ▪ REST API: Added maxDmxCount [Maximum DMX Port Count] to route api/preset, api/info, and api/dashboard (#12963). ▪ REST API: Added other information to route api/dashboard (#12965). ▪ REST API: Added deviceType to route api/info (#12965). ▪ The window to add or edit Sources and Destinations now visually opens much smoother (#12555). ▪ Removed the Priority Modifier from Add New Destinations and Edit Selection windows since the option is not available there (#12886). ▪ Corrected REST API documentation for rateDmxSend, rateDmxRcv, rateRdm/rateRdmSend from data type string to number and valid values true/false to 0/1 for enRdm (#12652). ▪ Repositioned the QR code of help.madrix.com close to the corresponding URL under Web Panel > Information (#12995). ▪ Fixed an issue that turned off the status LED of the MADRIX Logo on the device when changing the Ethernet IP address while sending DMX data (#11279). ▪ Fixed that the Rate value was shown incorrectly under Web Panel > Advanced when adding Destinations without Sources first (#11618). ▪ Fixed an issue that did not apply the Same For All New Sources settings from the Web Panel > Advanced > Add Sources dialog to added Sources (#11622). ▪ Fixed an issue that did not apply the settings for Filter and Advanced Settings from the Web Panel > Advanced > Add Destinations dialog to added Destinations (#11624). ▪ Fixed an issue that changed the icon for Highlighting for all collapsed tiles when changing it for a single collapsed tile (#11804). ▪ Fixed misaligned header rows under Web Panel > DMX Watcher when displayed in lower resolutions (#12156). ▪ Fixed visual issues with the glow indicating the current selection under Web Panel > Presets (#12189). ▪ Fixed an issue that always showed Offline for Power External although a power supply was connected (#12255). ▪ Fixed that certain languages were not automatically detected and set for the Web Panel via the locale (#12285). ▪ Fixed an issue that did not establish the connection to the Web Panel correctly again after a reboot of the device (#12357). ▪ Fixed visual issues with the user interface when expanding and collapsing the Modifiers section under Web Panel > Advanced > Destinations (#12671). ▪ Fixed not initialized variables for RDM Command and RDM Discovery that could lead to a hardfault (#12681). ▪ Fixed that received DMX packets as reply to RDM Command or RDM Discovery were valid, but neither discarded or processed (#12681). ▪ Fixed that the current tile selection was reset to tile 1 after changing a setting of a Source or Destination in the mobile view (#12818).
--	---

	▪ Fixed an issue that did not activate the Apply Settings button in certain cases (#12836). ▪ Fixed various type errors that were only visible in the developer console of web browsers (#12837). ▪ Fixed a CSS margin-top error that was only visible in the developer console of web browsers (#12839). ▪ Fixed a font download error under Web Panel > Ports that was only visible in the developer console of web browsers (#12843). ▪ Fixed an incorrect control type use for Autosave in the menu of the Web Panel (#12865). ▪ Fixed an issue that highlighted the wrong icons when using the Modifiers Channels From, Within Range, and Offset To under Web Panel > Advanced (#12867). ▪ Fixed an issue that did not highlight the Modifier icons in the Edit Selection window although the settings deviated from the default values (#12890). ▪ Fixed an issue that showed NaN as currently set value instead of Mixed when editing multiple Sources or Destinations with different Modifier settings via the Edit Selection window (#12891). ▪ Fixed an issue that could corrupt output data and cause the device to freeze eventually when sending while having Web Panel > DMX Watcher opened and a Source selected (#12893). ▪ Fixed an issue with showing the incorrect Snapshot index under Web Panel > DMX Watcher (#12989). ▪ Fixed pipe errors for translations under Web Panel > Information (#12993). ▪ Fixed visual issues with the Settings dialog under Web Panel > DMX Watcher (#13003).
	▪ Web Panel: Added a Light Theme in addition to the default Dark Theme; accessible via its menu icon (#11507, #12593, #12649, #12687, #12797). ▪ Web Panel: Dropdown boxes presenting multiple options now show a scrollbar, more options than before, and better indicate that there are more items to choose from if not all items can be shown at once (#11748, #12544). ▪ Web Panel > Advanced: Selected entries will no longer be deselected after clicking Apply (#11671). ▪ Web Panel > Advanced: Added an Edit icon [Pen symbol] to show that the name of Sources/Destinations can be edited (#11701). ▪ Web Panel > Advanced: The Apply Settings button is now highlighted by pulsing visibly to show that there are unsaved changes (#12073). ▪ Web Panel > Advanced: Now visually signals in red that it is required to select a Destination when adding a new Source (#12608, #12672). ▪ Web Panel > Advanced: Tile numbers are now visible even when editing the name of Sources or Destinations and can no longer be edited or deleted (#12646). ▪ Web Panel > Advanced: Added labels Automatic and Full to values 0 and 512 of Modifier Within Range (#12655). ▪ Web Panel > Advanced: Arrows indicating multiple options via a dropdown box are now visible even if the tile is collapsed (#12694). ▪ Web Panel > Network: Now warns if the set Ethernet IP address/subnet mask is invalid (#11661). ▪ Web Panel > Network: Now warns if the set Ethernet IP address/subnet mask overlaps with the settings of USB-C Front or USB-C Side since

	separated networks are needed for unambiguous network communication (#12562). ▪ Web Panel > Network: Separated the settings for both USB-C ports for improved legibility and translation optimizations (#12617, #12819). ▪ Web Panel > Ports: Now lists Dropped RDM Packets the device was not able to process correctly [incl. corresponding functions in REST API under /api/port/] (#12631, #12632). ▪ Web Panel > Information: Now shows the used web browser and display resolution (#12410, #12699). ▪ Updated the App Version of the Web Panel to 1.02 (#12599). ▪ Added a development hash to the App Version of the Web Panel for internal reference (#12212). ▪ Optimized various controls of the Web Panel to better fit the various languages and translations (#12287, #12586, #12587). ▪ Optimized translations and system resources that referred to the number of output ports (#12027, #12479, #12481, #12510, #12666, #12697, #12961). ▪ Updated and optimized system resources (#12065, #12441, #12473, #12530). ▪ Updated underlying web technologies (#12648, #12926). ▪ Optimized mobile views of Web Panel > Device List and Web Panel > Ports (#12543). ▪ Now voltage and temperature states are immediately updated when changing to a different language under Web Panel > Information and not only when their value changes (#12712). ▪ REST API: Added resolutionX, resolutionY, browser to route api/info (#12400, #12630). ▪ Applied the correct visual style to the Apply button under Web Panel > Network > syslog (#12696). ▪ Applied the correct visual style to the + Browse button under Web Panel > Backup (#12698). ▪ Fixed several cases in which the options to expand and to collapse views under Web Panel > Advanced were not working correctly (#12281). ▪ Fixed incorrect positioning of the copyright notice across the Web Panel (#12302). ▪ Fixed an issue that showed the first tile again after viewing and changing a setting of a tile with a higher index (#12590). ▪ Fixed that the Filter button did not correctly show how many filters were selected in certain languages under Web Panel > Presets (#12665). ▪ Fixed an issue not showing contents correctly upon loading under Web Panel > Dashboard (#12676). ▪ Fixed that the selection choice Mixed was available as Protocol under Web Panel > Advanced (#12686, #12669). ▪ Fixed incorrect draw radii of background fills of buttons with an outline (#12690). ▪ Fixed an issue that did not show the Uptime under Web Panel > Information in the languages Chinese Simplified and Indonesian (#12700). ▪ Fixed visual and usability issues in case of editing the name of a Source or Destination under Web Panel > Advanced (#12701). ▪ Fixed incorrect color values for the background color of the IP Address input field under Web Panel > Advanced > Advanced Settings (#12703).
--	---

	- Fixed an issue with inconsistent sizes of extended and collapsed views for Sources or Destinations under Web Panel > Advanced (#12689, #12740). - Fixed an issue that showed the wrong icon for the selected Highlight Mode after collapsing the view for a Source or Destination under Web Panel > Advanced (#12798). - Fixed an issue that +/- controls were not usable when showing the Web Panel in lower display resolutions (#12803).
STELLA 8 Firmware 1.03.2451 STELLA 8 Bootloader 1.02.2390 Release Date January 2026	Please follow these instructions to update the firmware of your devices: - Using MADRIX HARDWARE MANAGER Software version 1.1.0.150 is mandatory. The update over the device's Web Panel is likely to fail from from Firmware version 1.02 to version 1.03. - Web Panel > Advanced: Added a new dialog to quickly select available IP addresses for Unicast IP targets under Sources and Destinations (#11576). - Web Panel > Advanced: Opening the DMX Watcher here now automatically selects the selected/corresponding Source/Destination/Snapshot in the DMX Watcher (#11615). - Web Panel > Dashboard: Removed the green hue from the Model text since this value cannot be edited (#12071). - Web Panel > Information: Removed the green hue from the Model text since this value cannot be edited (#12071). - Web Panel > Presets: Added the All text label to the filter and removed the unnecessary X label (#12423, #12424). - Web Panel > Log: Added the All text label to the Log Levels filter and removed the unnecessary X label (#12423, #12424). - Web Panel > Log: Added Pause and Continue functionality via buttons (#12443). - Web Panel > DMX Watcher: Bars are now always shown in the same bright color to improve visibility (#12440). - Web Panel > Log: The search now begins right away, without the need to click on the magnifying-glass icon (#12509). - Added character counters to several input fields across the Web Panel (#12078). - Improved the responsive layout of the Top Menu (#12201). - Enabled IP Forwarding to be able to set the Ethernet IP Address to a network that is used for the two USB-C ports [and was thus reserved, even in the case that USB-C was not connected] (#12537). - REST API: Renamed dmxOUT/dmxIn to output/input in route api/wsControl (#12396). - REST API: Added maxDmxCount [Maximum DMX Port Count] to route api/source and api/dest (#12468). - The Language Selection is now being saved in the local storage of the web browser (#12425). - RDM: Matched temperature value ranges [MIN/MAX] of ArtRdm and Operating State (#12347). - RDM: Increased the Normal MAX of the reported PoE Voltage from 12 V to 13 V (#12613). - Large numbers are no longer displayed with a thousand separator for improved copying and pasting as well as legibility across different languages (#12067). - Set Web Panel App Version to 1.01.0000 (#12542, #12601)

	▪ Streamlined visual alignment of buttons and white space across the Web Panel (#12261, #12279) ▪ Fixed various reliability issues of the network gauges of the Web Panel > Dashboard (#11582). ▪ Fixed an issue that still showed outdated values in the DMX Watcher when data was no longer received or the Reference had been switched (#11720). ▪ Fixed an issue that did not correctly rescale the currently used bandwidth to the shown network scales (#11412). ▪ Fixed an issue that did not allow to reset the Search in the Log once all entered text had been already deleted (#11483). ▪ Fixed miscellaneous web-browser debugger errors of the Web Panel (#11520, #12355). ▪ Fixed an issue that reported voltage too low when switching from Power + USB-C to USB-C only (#11974, #12403). ▪ Fixed an issue that reported the Voltage to be too low if the Temperature was too high (#12005). ▪ Made sure that the maximum character count is enforced for various input fields across the Web Panel (#12078). ▪ Fixed several issues with the responsive design of dialog boxes of the Backup section (#12157). ▪ Fixed overlapping when entering long text in the search field of the Log window (#12236, #12443). ▪ Fixed that items were still filtered out after deselecting a previously selected Log Level (#12240). ▪ Fixed various issues that caused display issues with text labels and buttons regarding responsive design for mobile devices, including Web Panel > Hardware and Web Panel > Presets (#12252). ▪ Fixed an issue that deactivated the menu after selecting menu item Information on a mobile device (#12257). ▪ Improved the visual design of scrollbars of the Web Panel and thereby fixed several issues, such as overlapping (#12265). ▪ Fixed an issue that incorrectly showed the default login screen of the iOS operating system when entering the wrong password for the device's Web Panel (#12270). ▪ Fixed that certain settings of the Add and Edit dialogs were not applied to Sources or Destinations under Web Panel > Advanced (#12288). ▪ Fixed duplicate internal naming of two filters which could have lead to issue when using both at the same time (#12293). ▪ Fixed an issue that did not show a tile correctly after expanding it, deleting it, and creating it anew under menu item Advanced (#12306). ▪ Fixed various CSS errors of the Web Panel (#12307). ▪ Fixed an issue that could cause a firmware update to fail via Web Panel > Update (#12309). ▪ Fixed an issue that did not show the correct, translated text labels for each indexed item when selecting Pattern as Protocol for a Source (#12312). ▪ Fixed an incorrect SVG image for showing an LED status on the Web Panel (#12352). ▪ Fixed an issue that sorted log entries incorrectly by adding certain new entries at the bottom instead of the top (#12370). ▪ Fixed an issue that did not recognize a previously connected device over USB-C anymore and re-used an old IP address instead of providing a currently valid IP address (#12373).
--	--

	▪ Bypassed several issues with the menu regarding missing items, pinning, and scrolling when showing the Web Panel on an Android operating system by enlarging its size by 10 pixels (#12409). ▪ Fixed that the search under Web Panel > Log did not allow special characters to be used (#12418). ▪ Fixed missing minimum and maximum values of the Number Of Columns setting of the Web Panel > DMX Watcher (#12438, #12452). ▪ Fixed varying edit sizes of the Number Of Columns setting of the Web Panel > DMX Watcher (#12439). ▪ Fixed a missing icon when the connection to the Web Panel had been disconnected (#12420). ▪ Fixed an issue that did not show the frame of the selection control correctly before any selection was made for Save As when creating a Snapshot under Web Panel > DMX Watcher (#12451). ▪ Fixed incorrect line breaks when setting a high number for Column Grid under Web Panel > DMX Watcher (#12453). ▪ Removed unnecessary code elements (#12467). ▪ Fixed that the menu was missing when logging into a password-protected Web Panel on an iPhone smartphone (#12472). ▪ Fixed missing text labels when selecting Patterns via Index under Web Panel > Advanced > Edit Selection (#12484). ▪ Fixed a missing icon under the macOS operating system by replacing it with a similar one ◀ (#12491). ▪ Fixed an issue that did not free a network buffer again that would cause the Web Panel to become unresponsive after a while when enabling Web Panel > Network > Tools > Send Automatic IGMP Queries (#12506). ▪ Fixed an issue that caused the Firefox web browser to load font files twice (#12515). ▪ Fixed visual glitches of the green glow under Web Panel > Presets (#12525). ▪ Fixed that applying a Preset set the Apply Settings button as active under Web Panel > Advanced (#12570). ▪ Fixed deviating scrollbar behavior under Web Panel > Presets (#12573). ▪ Increased the width of the language selection to be able to show all available languages in full length, especially Portuguese (#12582). ▪ Increased the available space for Autosave text labels to be able to show all available languages in full length, especially Russian and Spanish (#12583). ▪ Removed the index under Web Panel > Device List to increase the available space when displayed in the web browser in small resolutions (#12585).
STELLA 8 Firmware 1.02.2390 STELLA 8 Bootloader 1.02.2390 Release Date July 2025	▪ Initial firmware release.

//PART 5

General

5 General

Topics Of This Chapter

- [PC Power Management](#)
- [Tips \[Microsoft Windows / Networks / USB\]](#)
- [Web Links](#)

5.1 PC Power Management

This topic includes:

- [Why Is Power Management Important?](#)
- [Usage](#)
- [Activate High Performance](#)
- [How To Change USB Power Settings](#)

Why Is Power Management Important?

We strongly recommend to deactivate all power saving options in Microsoft Windows in order to ensure an interruption-free operation of MADRIX 5.

Microsoft Windows operating systems offer a wide variety of power-management options. In most cases, laptops, notebooks, and netbooks benefit from a longer battery life if a good power management is in use. But certain problems might occur because of computer power savings nevertheless:

- After a while your MADRIX KEY cannot be identified by the software anymore.
- Your hardware interfaces are suddenly deactivated.

Usage

Make sure to set up power-saving settings especially if you are using:

- A MADRIX KEY [USB dongle]
- MIDI controllers [via USB]
- USB hardware interfaces [such as MADRIX STELLA 8]
- A notebook/laptop to run MADRIX 5


Additionally:

- Make sure to change the USB power settings.
- Especially for notebooks, we recommend to activate the High performance power plan.

Activate High Performance


This setting will make sure that your notebook or laptop will have all its potential performance available for MADRIX 5.

- In Windows 10, select **Start > Windows System > Control Panel > Power Options**, and change the power plan to **High performance**
[You might need to click on **Show additional plans**].

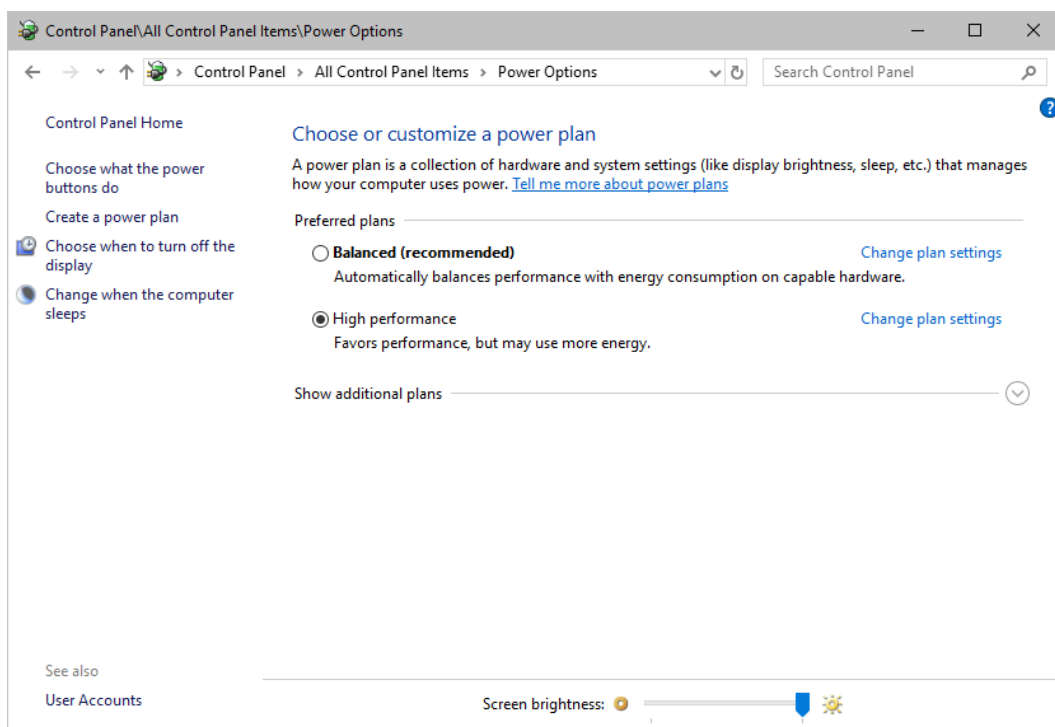


How To Change USB Power Settings


- In Windows 10, select **Start > Windows System > Control Panel > Power Options > Change plan settings**

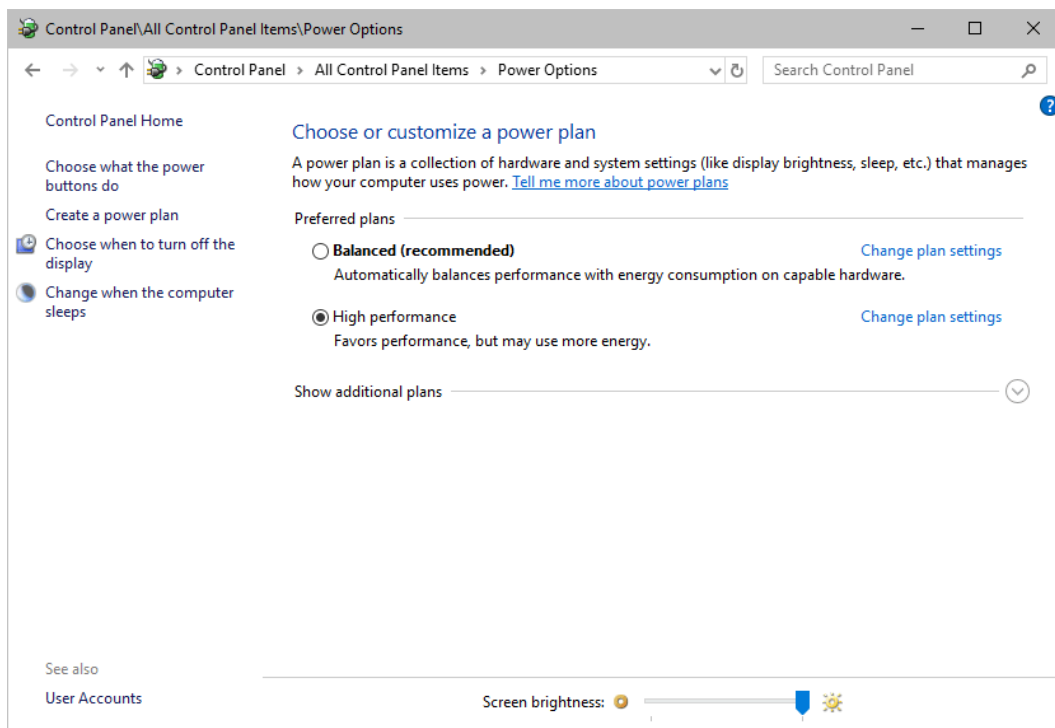

- Click **Change advanced power settings**

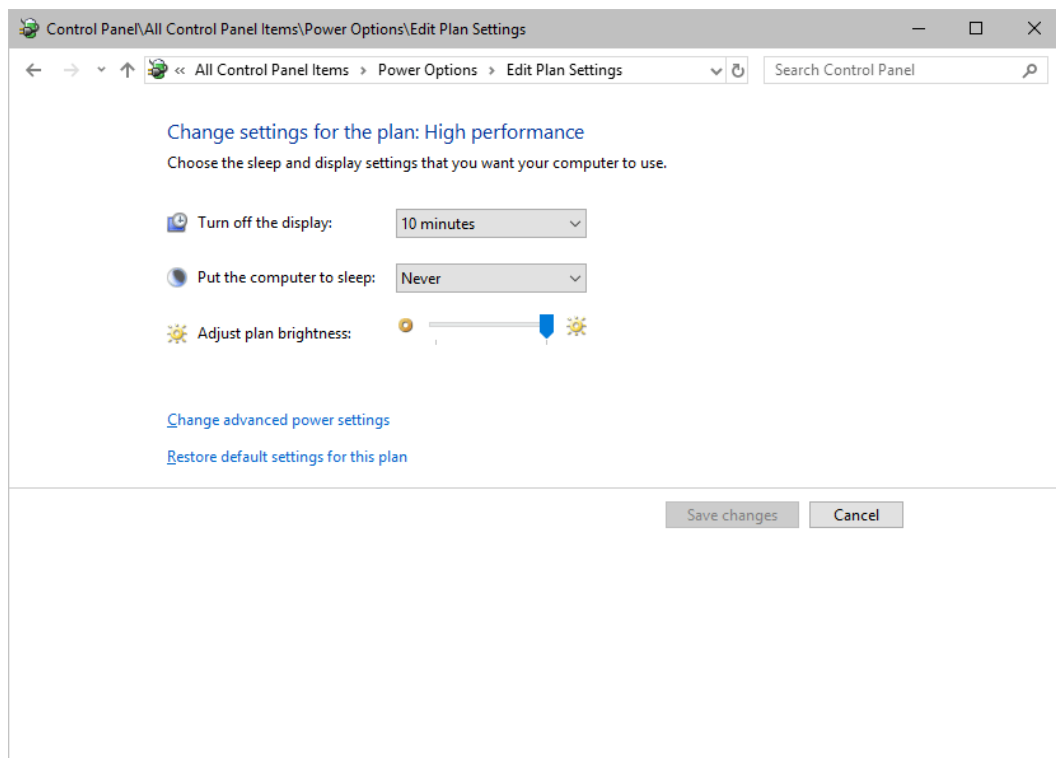

- Especially the **USB settings** are important. Disable the suspend settings!

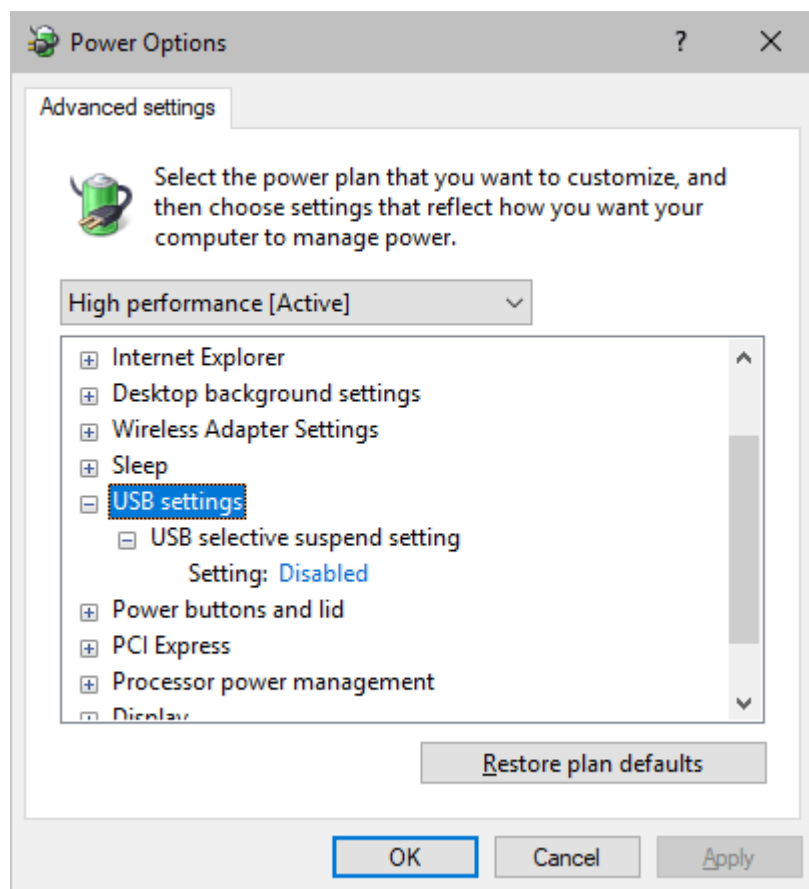

- Change any other settings that might interrupt the operation as required.

5.2 Tips [Microsoft Windows / Networks / USB]

This topic includes:


- [Error When Saving Files](#)
- [USB](#)
- [The Windows Firewall](#)
- [Working With Ethernet Networks](#)
- [Changing The Priority Of Network Adapters](#)
- [Working With Files](#)
- [Operating System Security](#)
- [Up-To-Date Drivers](#)
- [Windows Restart / Shut Down](#)
- [Monitoring Computer Performance](#)

Error When Saving Files

If you are experiencing issues when trying to save files, there are two solutions to this problem:

- **Right Click > Run as administrator**

- In order to save files as a user that is logged-in into Windows, you need to have the permissions set by Windows to do so.
- When you do not have the right permissions, saving files can lead to errors.
- To circumvent such issues, you can run the MADRIX Software as administrative computer user, the so-called administrator.
- Perform a **right mouse click** on the **MADRIX.exe** [or a shortcut to the MADRIX 5 Software] and choose **Run as administrator**
- **Note:** You need to have access to the administrator account (i.e., password). Logging in as administrator grants extensive rights for any computer changes. If you are not familiar with Windows or computers, please seek advice.

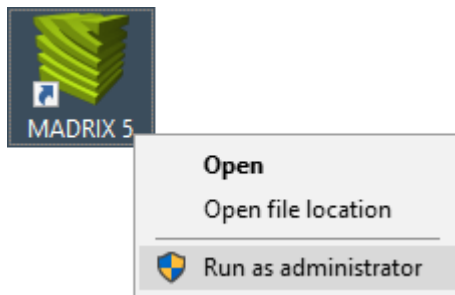

- **Choose A Different Directory**

- When you are experiencing issues and running as administrator is not an option, choose a different directory on your haddisk to save the files.
- There are locations on your computer/harddisk where you will have the permission to save files. Choose such a location.
- Examples are:

C:\Users\USERNAME\Desktop

C:\Users\USERNAME\Documents

[**USERNAME** specifies your Windows account name.]

USB

Among others, USB is an important way to work with MADRIX 5, MADRIX KEYS, MADRIX hardware interfaces, MIDI controllers, etc. In order to ensure a stable work environment, we highly recommend setting up corresponding USB settings in Windows.

Learn more » [PC Power Management](#)


The Windows Firewall

Correct Settings

The primary purpose for the Windows Firewall [or any other firewall] is to block any unwanted incoming or outgoing data and access. But this can lead to problems, when data that should go through is automatically blocked.

MADRIX 5 will automatically set the correct firewall settings for you during the installation process.

Please follow the steps below if this Windows message appears when you start the MADRIX 5 Software for the first time.

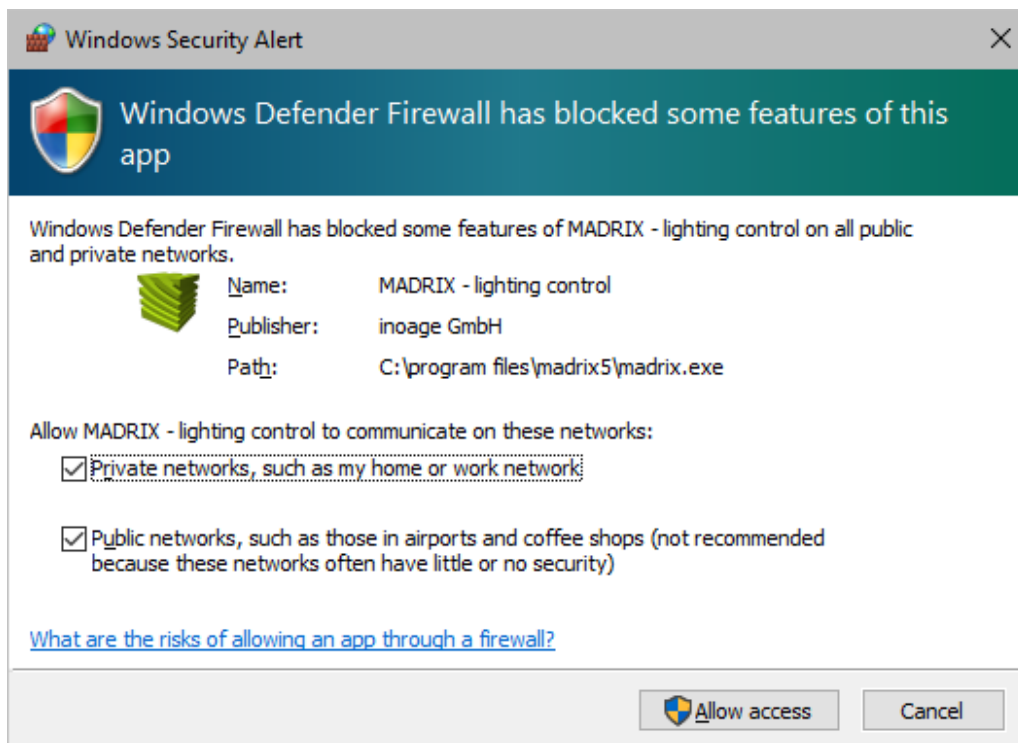

Select and set a checkmark for



- **Private networks**
- and
- **Public networks**
- Click **Allow access** to confirm.


Not selecting both options can cause problems with network communication.

Resetting The Settings

If you have already chosen the wrong options MADRIX 5, you can delete the settings and choose again.

- In Windows 10, go to **Start > Windows System > Control Panel > Windows Defender Firewall > Advanced settings > Inbound Rules**

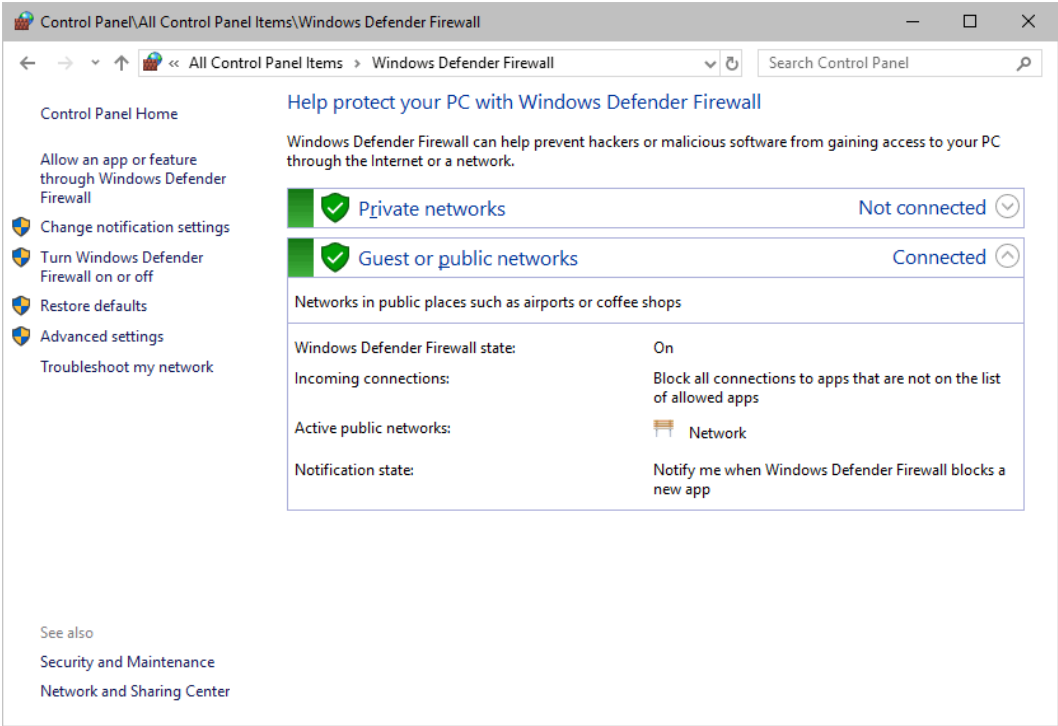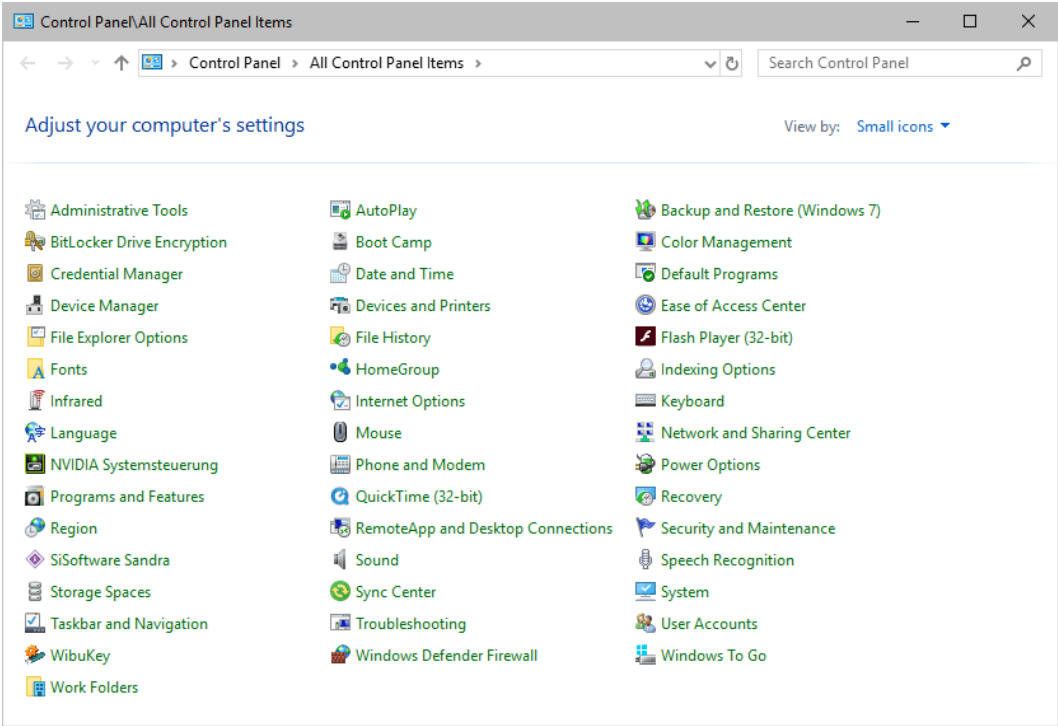

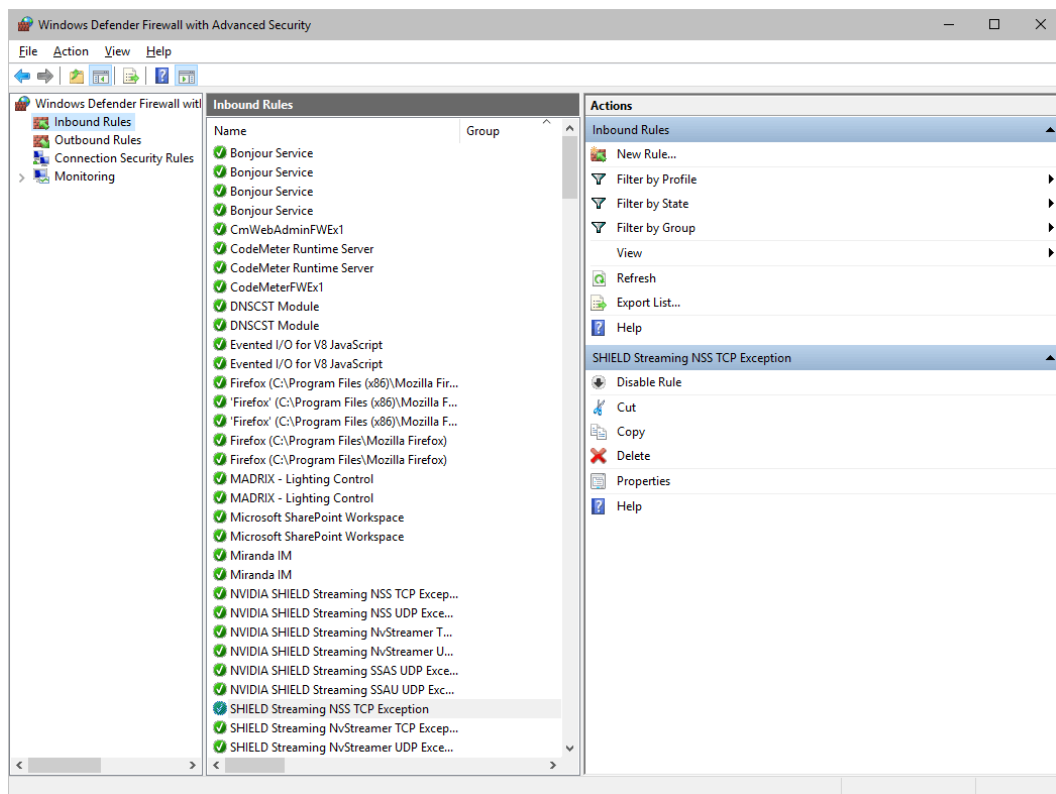



- Select and delete any entries relating to MADRIX 5 [e.g., madrix.exe, MADRIX - music makes the light, MADRIX - LIGHTING CONTROL].
- With your next start of MADRIX 5, select both options as described above.



Working With Ethernet Networks


Configuration Of Network Settings


When working with network-based products and MADRIX 5 [for example, Art-Net, KiNET, sACN, etc.], you will have to set up the IP address of your network card in Windows. Learn how to set it up here.

- In Windows 10, go to **Start > Windows System > Control Panel > Network and Sharing Center > Change adapter settings > Local Area Connection > Properties > Internet Protocol Version 4 (TCP/IPv4) > Properties**

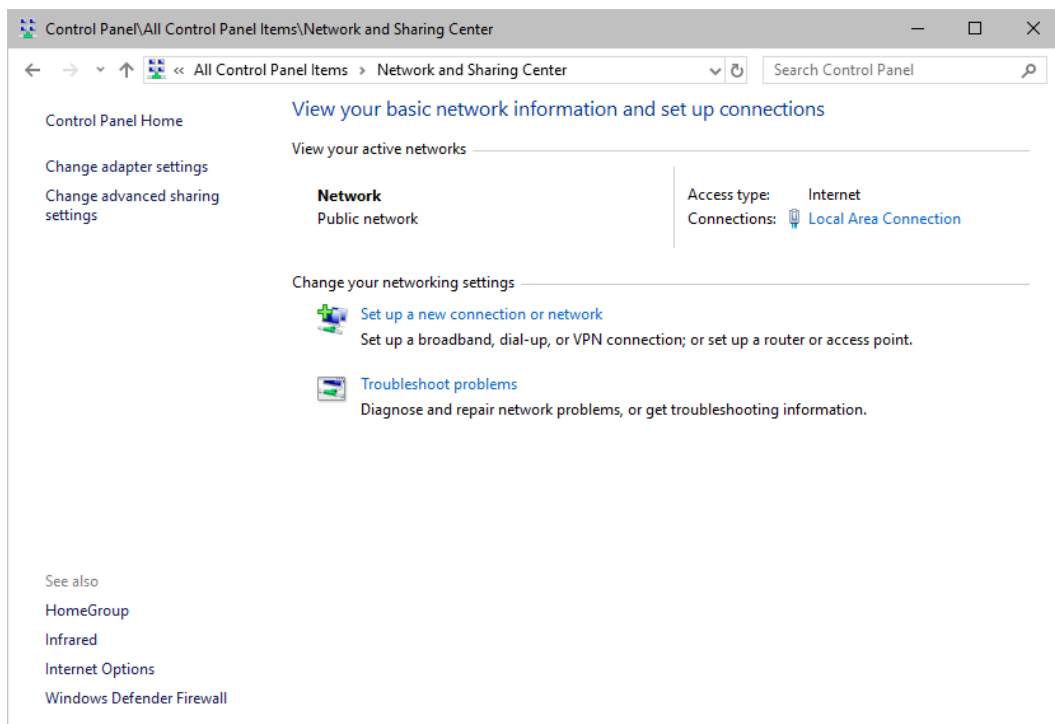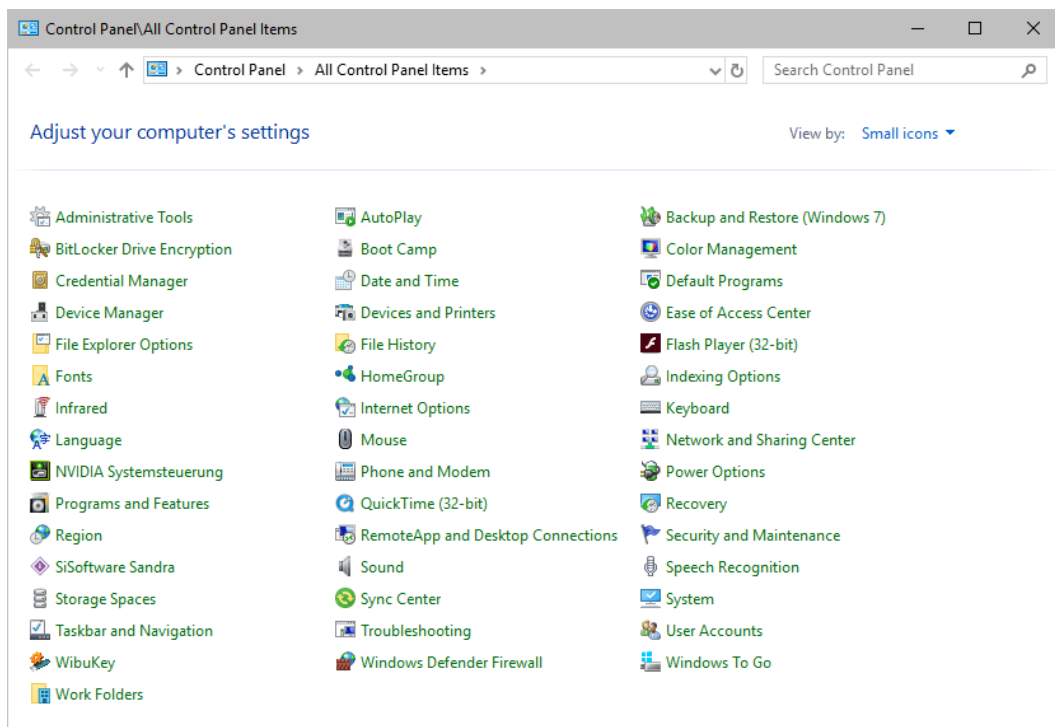

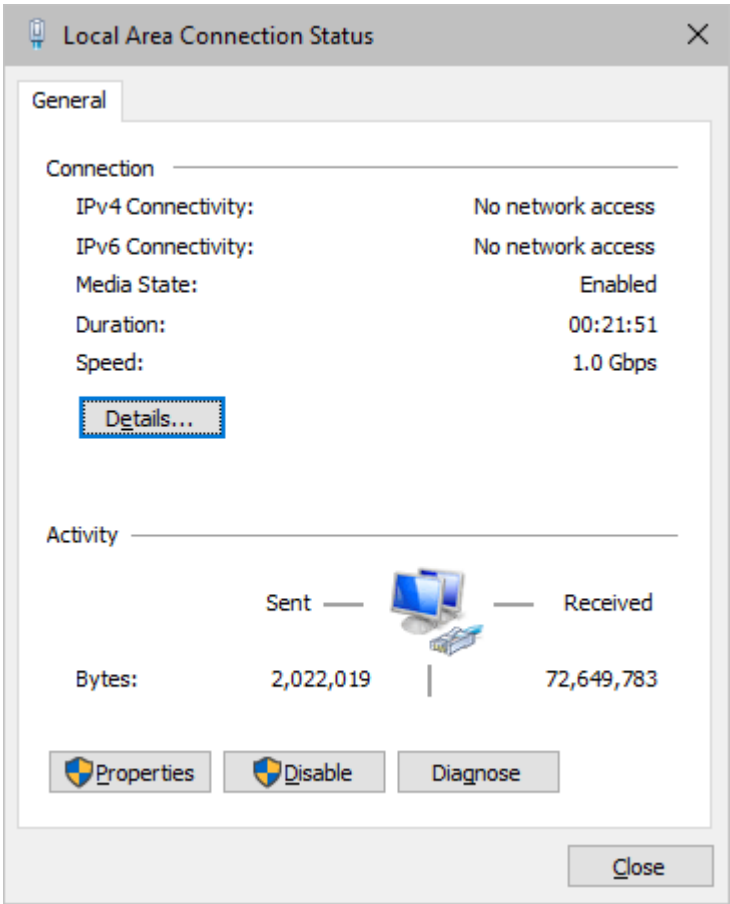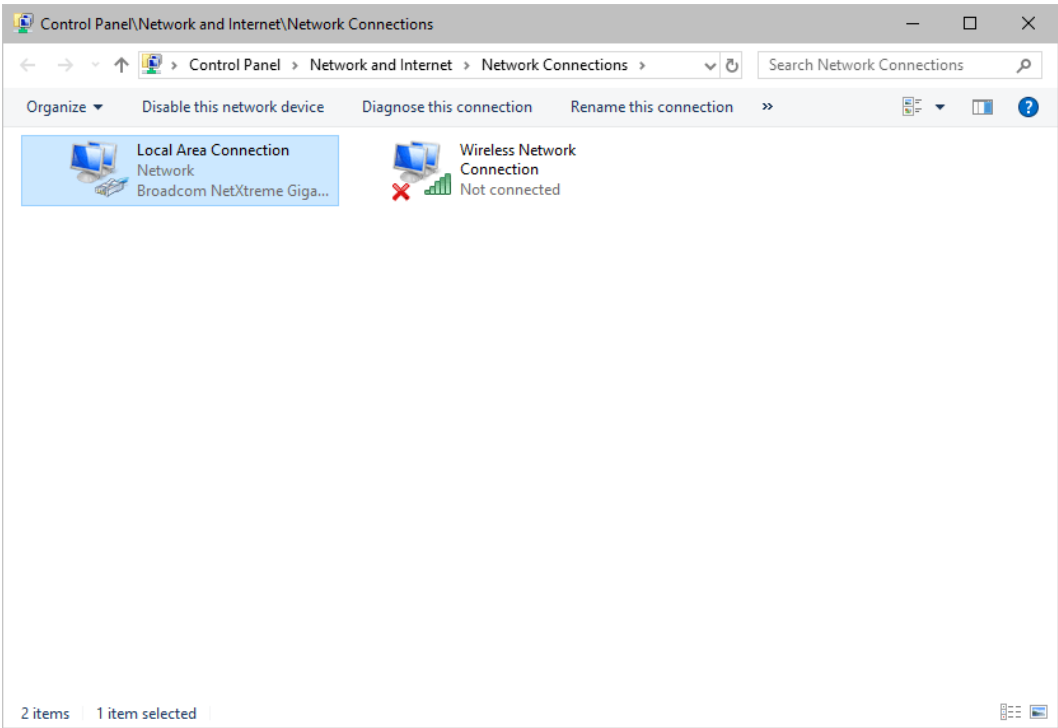

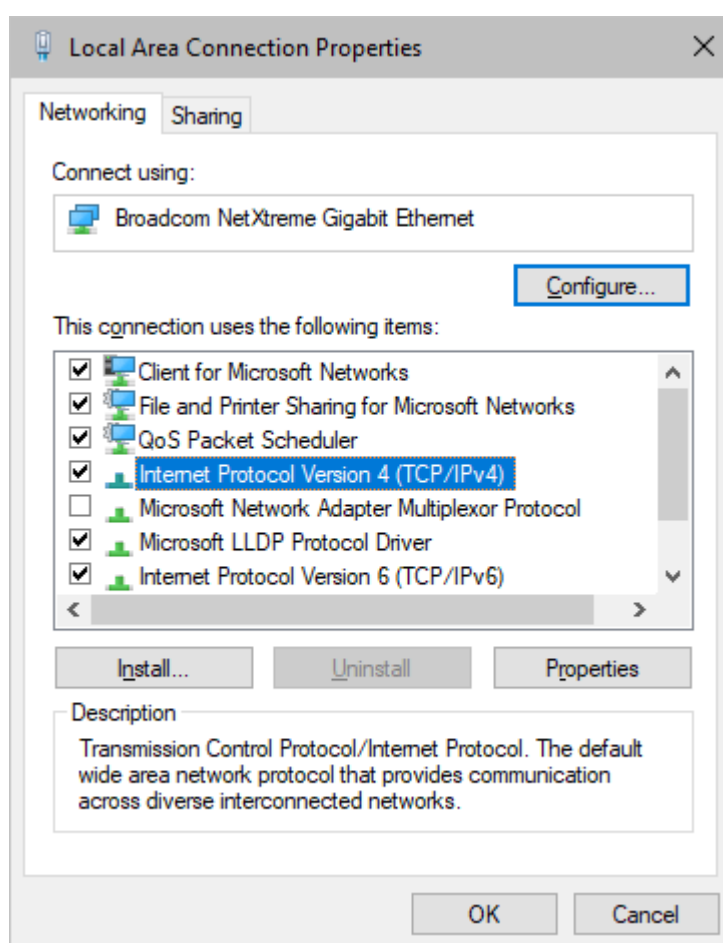

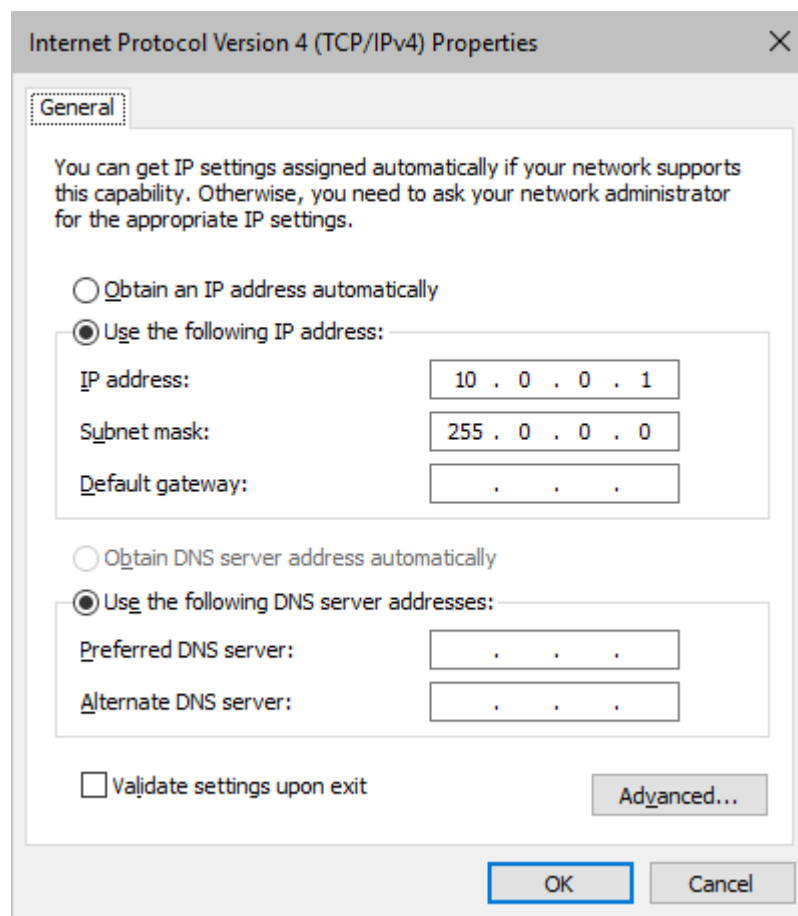

Set up the following settings:

- Enable **Use the following IP address:**
- **IP address** - Sets the IP address for this computer and this network card.
 - If you have several network cards in your computer, you can set up an individual address for each network card.
 - An IP address has 4 parts. Enter the complete address as explained in the specific chapter of this user guide [e.g., 10.0.0.1].
 - You only have to enter the numbers.
- **Subnet mask** - Sets up the Subnet mask for this computer.
 - This is an important part of the network settings, just as the IP address.
 - A Subnet mask has 4 parts. Enter the complete address as explained in the specific chapter of this user guide [e.g., 255.0.0.0].
 - You only have to enter the numbers.
- **OK** - Click to save your settings.
 - [Make also sure to close the **Local Area Connection Settings** with **OK** and close the **Local Area Connection Status** window with **Close**.]
- Restart the MADRIX 5 Software if you have changed any network settings!

Learn more below.

Using Several Devices In A Network

Usually, you will use at least 2 devices in a network [for example, 1 MADRIX PC and 1 Art-Net node or 1 MADRIX PC and 1 console]. As explained above, you will need to configure various network settings not only for your MADRIX PC but also for the other devices.

To be able to communicate with each other, all devices have to be in "the same network". That means:

- All devices need to be physically connected with each other [through network equipment, such as hubs or switch and/or network cables]
- All devices need to have compatible network settings

Using several devices in a network does not mean that all should have the same IP address. That will not work!



Instead, follow these rules:


- **Set up all devices within the same IP address range, but never with the same IP address [for example, MADRIX PC: 10.204.226.101 and Art-Net node: 10.204.226.102]**
- **Set up all devices with the same Subnet mask e.g., 255.0.0.0]**
- **If recommended, set up all devices with the same Default gateway [e.g., 10.0.0.1]**

Changing The Priority Of Network Adapters


You can change the order in which Windows and MADRIX 5 accesses your network adapters. By changing the order, you can specify which network adapter [network card] is used first and as the main connection.

- **1]** In Windows 10, go to **Start > Windows System > Control Panel > Network and Sharing Center > Change adapter settings**

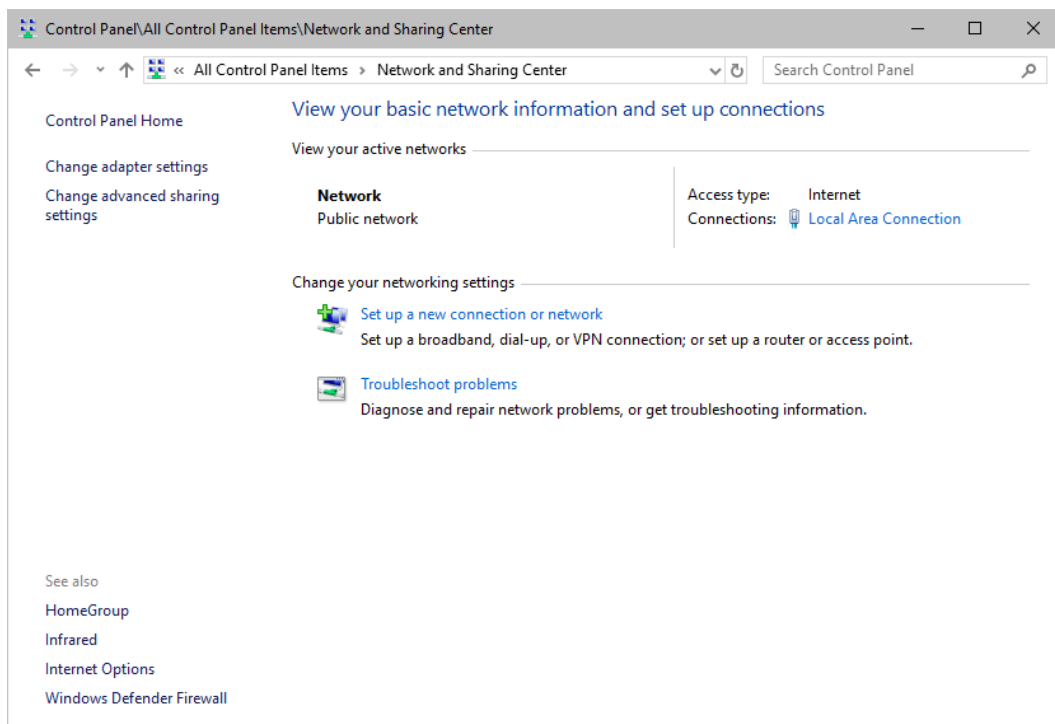
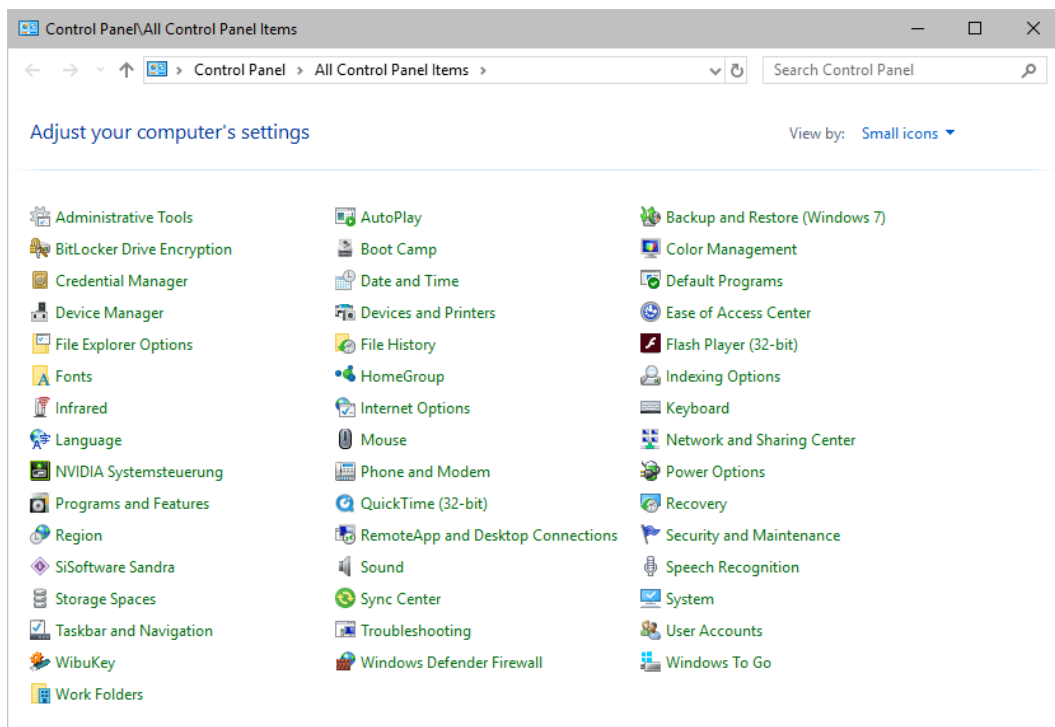


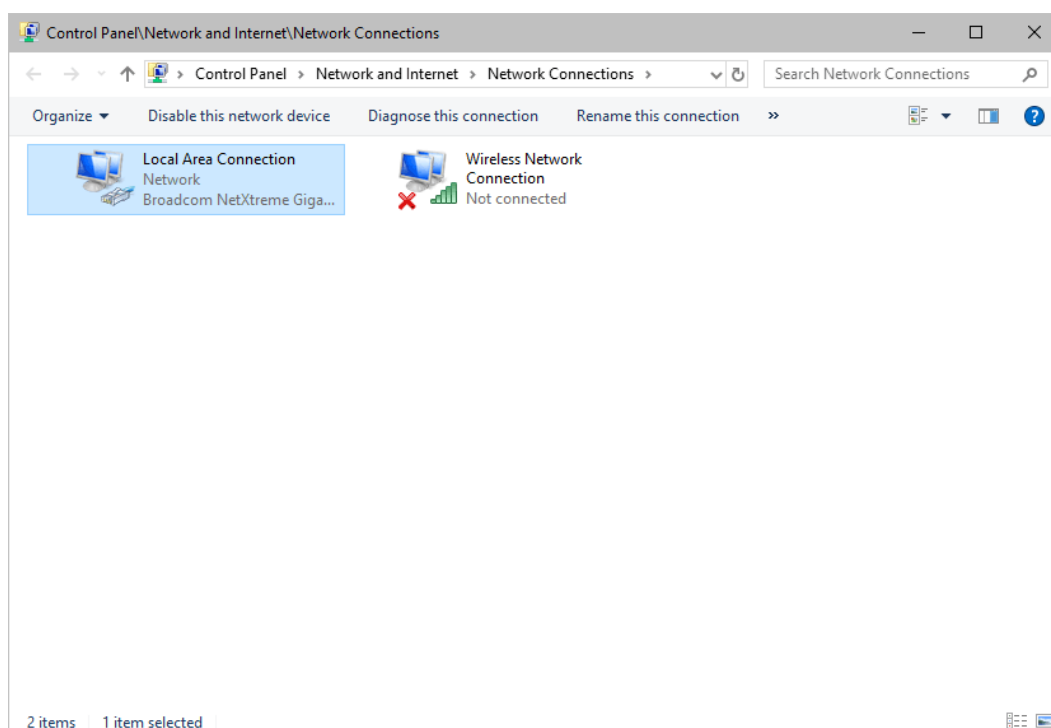

- **2]** Press **Alt** on your keyboard.
 - A menu appears at the top, which is otherwise hidden.

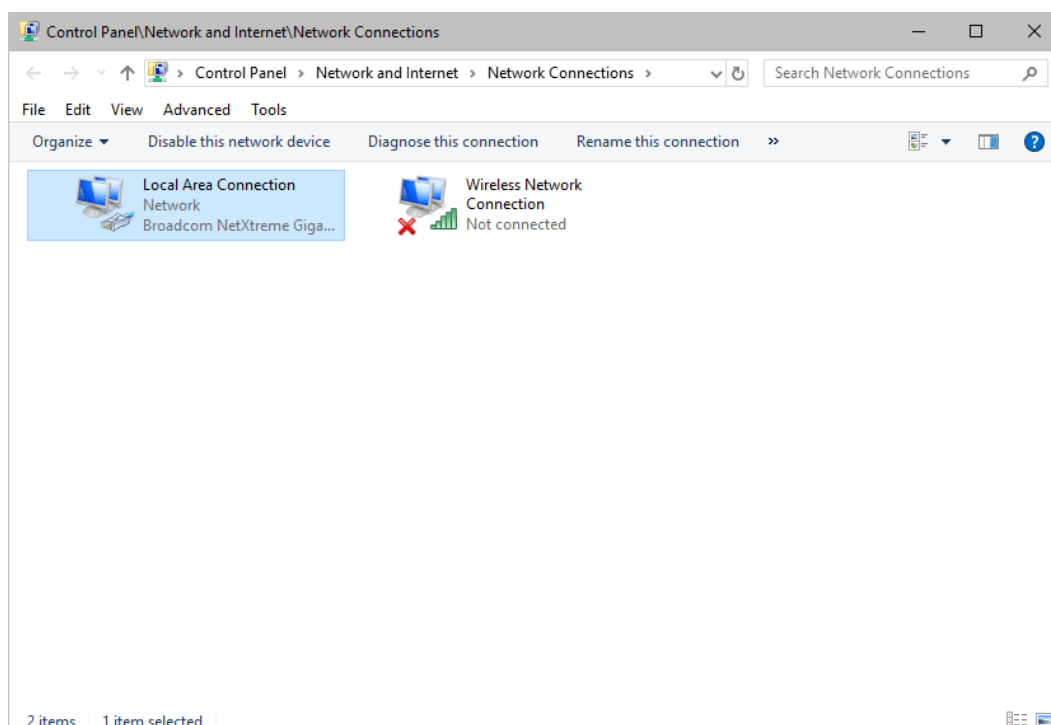

- **3]** Go to ***Advanced > Advanced Settings...***
 - A new window opens.

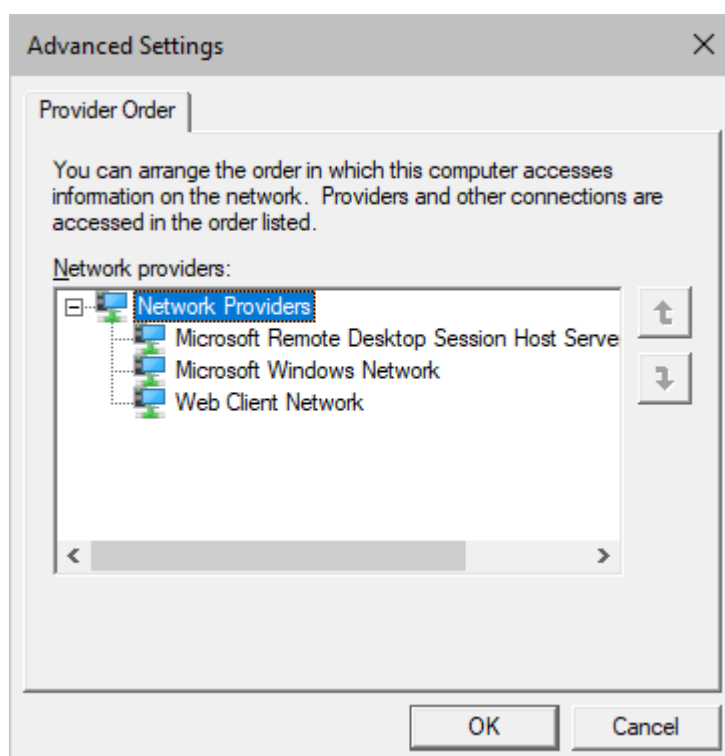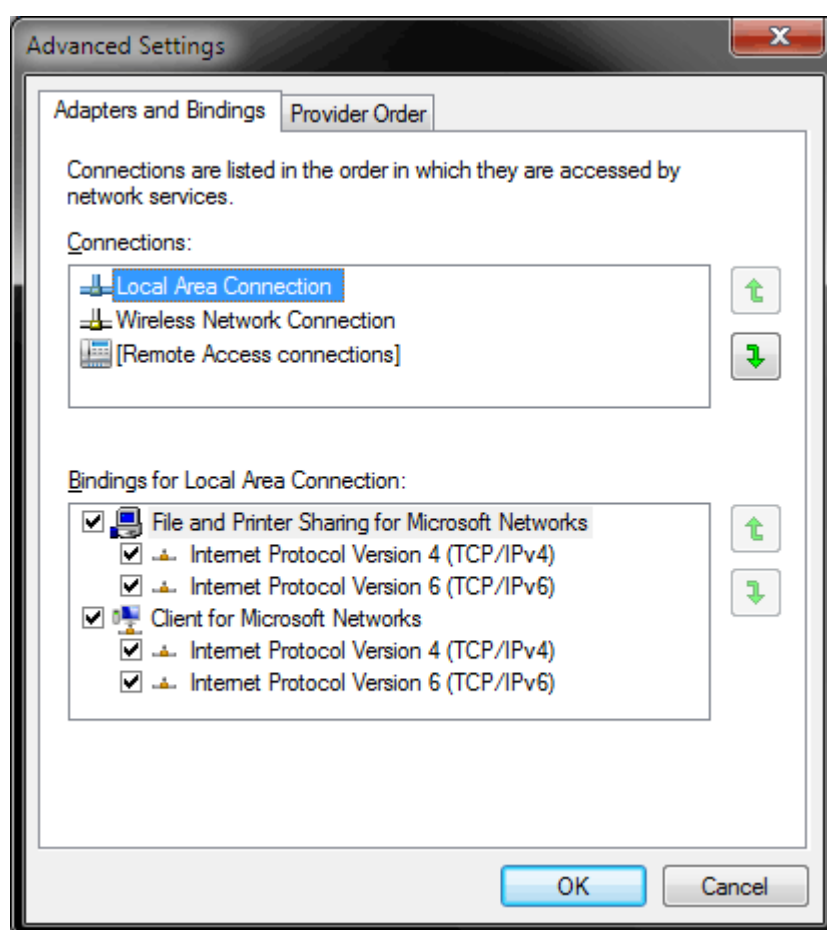

- **4]** Select your preferred network connection[s] in the list of **Connections:**
- **5]** Change the order by clicking on the **green up and down arrow buttons** on the right hand side.
 - The connection which is listed on top, is the first and prioritized adapter.
- **6]** Click OK to confirm.
- **7]** Restart your computer.

Working With Files

When working with computers in general, you should be aware that any digital data is sensitive and prone to failure and hardware errors.

We recommend

- to save regularly when creating a show in MADRIX 5.
- to make backup copies of your show files from time to time [MADRIX 5 Setup files]
- to make backup copies to different or external storage mediums [e.g., USB stick/thumbdrive].

Operating System Security

It is recommended

- to keep Windows up-to-date by installing security updates using **Windows Update**
- to use a virus detection software when working with files from external sources.

Up-To-Date Drivers

Please always keep all component drivers up to date by installing the latest available driver. Among others, this may include drivers for:

- Processor
- Graphics Card
- USB
- Capture Card
- Sound/Audio Card
- Video Codecs

Windows Restart / Shut Down


According to the requirements of Windows, MADRIX 5 will behave in the following way:

- MADRIX 5 will be closed instantly, when you trigger a Restart or Shut Down of Windows.
- If you have not saved any changes yet, you may be provided the chance and a short time frame [30 seconds] to react and save your progress before the MADRIX 5 Software is forcefully closed by Windows itself.
- **Make sure to save your files before executing a Restart or Shut Down!**

Monitoring Computer Performance

Windows allows you to monitor the overall performance of your computer.

- Press **Ctrl + Alt + Del** and choose **Start Task Manager**
[German shortcut: Strg + Alt + Entf]
- A new window opens [Task Manager].
- Go to **Performance**

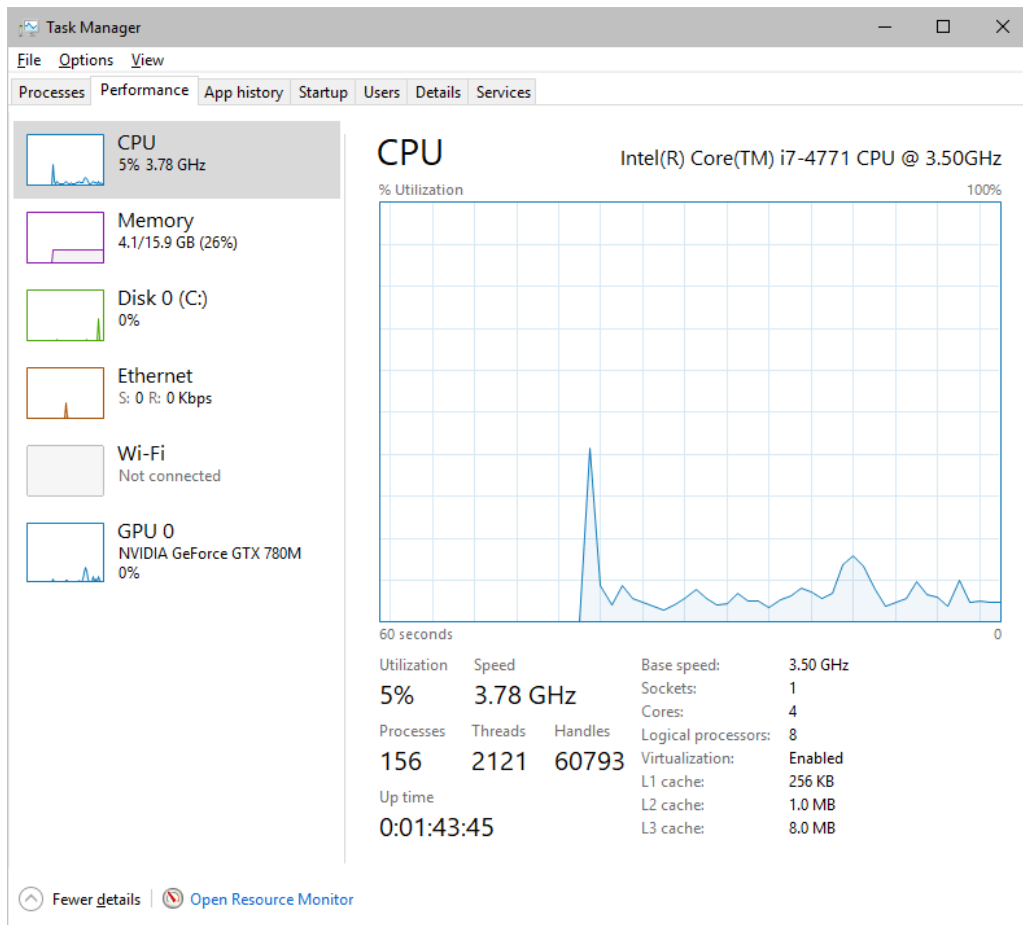

- You can now monitor the **CPU Usage** as well as the **Memory** usage.
- MADRIX 5 has its own monitoring tools.

5.3 Web Links

This topic includes:

- [Overview](#)

Overview

You can find a selection of useful internet links here:

- MADRIX Website
 - » www.madrix.com
- Drivers / Downloads
 - » www.madrix.com/support/download
- User Guides [Online And Downloadable PDF]
 - » help.madrix.com
- Hardware Technical Manuals / Quick Start Guides [Downloadable PDF]
 - » help.madrix.com
- Online Forum
 - » www.madrix.com/support/forum
- Software Release Notes / Hardware Release Notes
 - » www.madrix.com/products/software/releases
- Online Text Tutorials
 - » help.madrix.com/tutorials/html/index.html
- Video Tutorials
 - » <https://www.madrix.com/training/video-tutorials>

//PART 6

Legal

6 Legal

This topic includes:

- [Introduction](#)
- [Topics Of This Chapter](#)

Introduction

Legal includes all legal documents and information, including copyright and more.

Topics Of This Chapter

- [Imprint And Copyright](#)

6.1 Imprint And Copyright

This topic includes:

- [Company And Address](#)
- [Copyright](#)
- [Credits](#)

Company And Address



inoage GmbH
Wiener Straße 56
01219 Dresden
Germany

Managing Directors: Christian Hertel, Sebastian Pinzer, Sebastian Wissmann

Phone: +49 351 862 6869 0
Fax: +49 351 862 6869 68

Web: » www.madrix.com
E-mail: » info@madrix.com

Copyright

© Copyright (C) 2001 – 2026 inoage GmbH. All rights reserved.

MADRIX® is a registered trademark of inoage GmbH.

All other company names and/or product names are trademarks and/or entered trademarks of their respective holders. The product might not always be conforming to the presentation, features, and performances. Technical data can differ slightly, depending on the operating system and the chosen hardware.

We withhold the option of changes without notification. inoage GmbH does not give any guaranty for function capability for a certain purpose, the marked ability or other features of the product. No other guaranty claims, on legal or other terms, can be enforced.

Under no circumstances does inoage GmbH take on the responsibility for liabilities for faults for losses in sales volume or profits, that occur through the usage of the product, through the serviceability, through abuse, happenings, circumstances or actions, that we have no influence on. No matter if the damages were caused by the holder of the product or a third person.

Credits

- Art-Net™ - Designed by and Copyright Artistic Licence Holdings Ltd.
- Other product and company names, terms, or [trade] marks are the property of their respective holders.